

IT'S ALL ABOUT A Cyccol SYSTEM





CONTACT HEADQUARTERS GERMANY



Marco Massaro and of Salas m.massaro@vosschemie.de +49 (0) 41 22 / 717-205



Martin Schuster Sales Manager Europe n.schuster@vosschemie.de +49 (0) 172 / 408 94 80



Gaby Büchner g.buechner@vosschemie.de +49 (0) 41 22 / 717-190



Steven Lück s.lueck@vosschemie.de +49 (0) 173 / 722 92 18

SYSTEM

CARSYSTEM IS THE FIRST ADDRESS FOR ALL PRODUCTS AROUND THE BODY- AND PAINT REPAIR IN THE AUTOMOTIVE RANGE.

62 partners, 64 countries, more than 2,000 products – global demand has made us one of the leading suppliers of non-paint products for the automotive repair industry. This pole-position is the result of the uncompromising to quality and the consequence of more than 60 years of experience in the market.

As a trademark of VOSSCHEMIE, based in Uetersen near Hamburg / Germany, we benefit from decades of development and production of polyester fillers. Around these core competences we have constantly expanded our product range. Meanwhile we have everything on hand what you need for a competent and professional automotive body repair.

Good if everything comes from one source. Better when all products are precisely verified on each other. The best if certified quality secures constant standards (certified to DIN EN ISO 9001:2015).

This successful system has a name: CARSYSTEM




BRILLIANT




006	ABRASIVES
052	PUTTIES
082	MASKING
096	PAINTING
126	PAINT FINISH
144	BONDING & SEALING
158	CLEANING
168	PERSONAL SAFETY
182	ACCESSORIES

MINI RANDOM ORBITAL SANDER ORBITAL SANDER SANDING BLOCK H2O SOFT F.19 TOP LINE BACK PAD **ABBRASSIVES** RUPES V.19 PREP & SCUFF P.19 DRY COAT PAD SANDING WATER TEC LINE INTERFACE PAD RANDOM ORBITAL SANDER SANDING BLOCKS

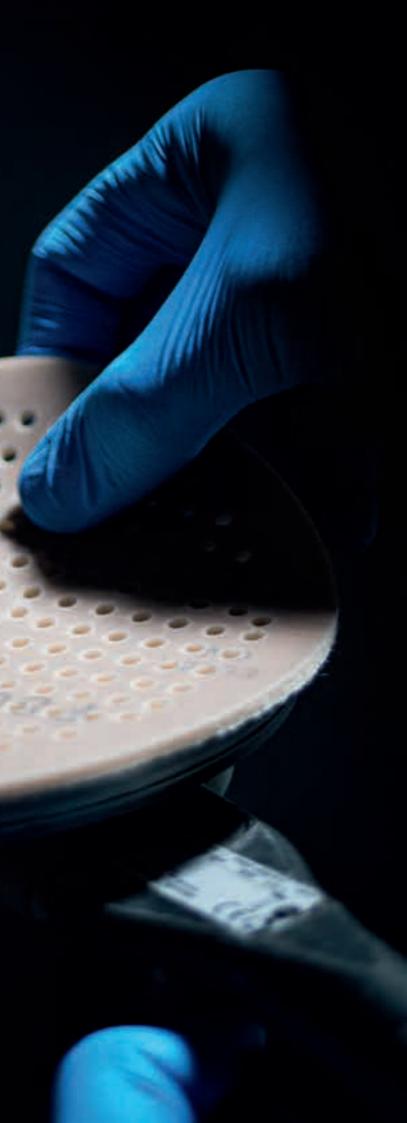

Sanding Disc P.19

Paper abrasive – 150 mm – 25 holes



Abrasives

Description

Universal paper-sanding disc
 Carsystem hole pattern 25 holes and oval center hole
 Aluminium oxide grain

Area of application

Suitable for corse to fine sanding

Benefits

High cutting power High efficiency

ArtNo.	Specification	SP	MOQ
156.357	P 40	50	500
156.358	P 60	50	500
156.359	P 80	50	500
156.361	P 120	50	500
156.362	P 150	50	500
156.363	P 180	50	500
156.364	P 220	50	500
156.365	P 240	50	500
156.367	P 320	50	500
156.368	P 360	50	500
156.369	P 400	50	500
156.370	P 500	50	500
156.371	P 600	50	500


Sanding Strips P.19

Paper abrasive – 70 × 400 mm



Sanding Strips P.19

Paper abrasive – 70 × 198 mm



Description

Paper-based sanding stripsAluminium oxide grain

Area of application

Suitable for corse to fine sanding.

Benefits

High cutting powerHigh efficiency


Application advice

We recommend using a dust extraction system.

ArtNo.	Specification	SP	MOQ
156.670	P 40	50	1000
156.671	P 60	50	1000
156.672	P 80	50	1000
156.673	P 120	50	1000
156.674	P 150	50	1000
156.675	P 180	50	1000
156.676	P 220	50	1000
156.677	P 240	50	1000
156.678	P 320	50	1000
156.679	P 400	50	1000

Sanding Disc F.19

Film abrasive – 150 mm – 25 holes



Description

Paper-based sanding strips Aluminium oxide grain

Area of application

Suitable for corse to fine sanding

Benefits

- High cutting powerHigh efficiency

Application advice

We recommend using a dust extraction system.

ArtNo.	Specification	SP	MOQ
156.680	P 40	50	500
156.681	P 60	50	500
156.682	P 80	50	500
156.683	P 120	50	500
156.684	P 150	50	500
156.685	P 180	50	500
156.686	P 220	50	500
156.687	P 240	50	500
156.688	P 320	50	500
156.689	P 400	50	500

Description

- High performance film-based sanding disc
 Carsystem hole pattern 25 holes and oval center hole
 Aluminium oxide grain

Area of application

Suitable for corse to fine sanding

- Extremely high and long lasting cutting power
 Universal high performance sanding disc

ArtNo.	Specification	SP	MOQ
156.046	P 80	50	1000
156.048	P 120	50	1000
156.049	P 150	50	1000
156.050	P 180	50	1000
156.051	P 220	50	1000
156.052	P 240	50	1000
156.054	P 320	50	1000
156.055	P 360	50	1000
156.056	P 400	50	1000
156.057	P 500	50	1000
156.058	P 600	50	1000
156.059	P 800	50	1000

Sanding Disc F.19

Film abrasive – 77 mm



Description

High performance film-based sanding disc
Aluminium oxide grain

Area of application

Suitable for corse to fine sanding

Benefits

Extremely high and long lasting cutting power
 Universal high performance sanding disc

ArtNo.	Specification	SP	MOQ
156.647	P 80	50	1000
156.648	P 120	50	1000
156.649	P 150	50	1000
156.650	P 180	50	1000
156.651	P 220	50	1000
156.652	P 240	50	1000
156.653	P 320	50	1000
156.654	P 400	50	1000
156.655	P 500	50	1000
156.903	P 800	50	1000

Sanding Disc F.19 Finish

Film abrasive - 77 mm



Sanding Disc F.19 Finish

Film abrasive – 152 mm – 15 holes



Description

- High performance film-based sanding disc
- Special coating
 Carsystem hole pattern 15 holes and oval center hole
 Aluminium oxide grain

Area of application

- Blending
 Matting of surfaces
 Finish (Removing of imperfections)


Benefits

- Extremely fast removing of surface structure and imperfections
 Special coating provides an extra fine and even sanding pattern
 Perfect levelling of the transition zone between new and old paint layers
 Reduces the reworking time in the finishing process

ArtNo.	Specification	SP	MOQ
156.899	P 1000	50	1000
156.900	P 1200	50	1000
156.901	P 1500	50	1000
156.902	P 2000	50	1000

Sanding Disc F.19 Soft

Film abrasive - 152 mm - Multi hole



Description

- High performance film-based sanding disc
 Special coating
 Aluminium oxide grain

Area of application

- Blending
 Matting of surfaces
 Finish (Removing of imperfections)

Benefits

- Extremely fast removing of surface structure and imperfections
 Special coating provides an extra fine and even sanding pattern
 Perfect levelling of the transition zone between new and old paint layers
 Reduces the reworking time in the finishing process

ArtNo.	Specification	SP	MOQ
156.904	P 1500	50	1000
156.905	P 2000	50	1000

Description

- High performance film-based sanding disc with foam back
- Multi holeAluminium oxide grain

Area of application

- Filler finishBlendingMatting of surfaces

- Surface structure is sanded evenly
- Extremely high and long lasting cutting power
 Comfortable sanding due to the foam back

ArtNo.	Specification	SP	MOQ
156.933	P 320	30	600
156.934	P 400	30	600
156.935	P 500	30	600
156.936	P 600	30	600
156.937	P 800	30	600

Tec Line N20

Net sanding strips 70 × 400 mm



Description

- Net sanding stripes
- Special coating
 Aluminium oxide grain

Area of application

Suitable for every sanding application on putties and fillers from coarse to fine sanding

Benefits

- = Due to the perforation of the individual stripes, the Tec Line N20 can be used on both 70 \times 400 mm and 70 \times 200 mm tools
- Extremely dust-reduced sanding
 The characteristic of the net provides a very long lifetime

ArtNo.	Specification	SP	MOQ
157.438	P 80	50	200
157.439	P 120	50	200
157.440	P 180	50	200
157.441	P 240	50	200
157.442	P 320	50	200
157.443	P 400	50	200

Topline WP S

Paper abrasive - 230 × 280 mm



Description

Wet sanding paper

Silicon carbide grain
 Flexible latex reinforced A-paper P80 – P180
 Smooth latex reinforced C-paper P220 – P2000

Area of application

Wet sanding of filler coated or painted surfaces

Tec Line Softflex

Paper abrasive – Roll – 115 × 125 mm

Description

- Paper-based abrasive with foam
- back Boll with tear-off perforation
 200 tear-offs / box

Area of application

Manual sanding of curves and hard-to-reach areas Suitable from coarse to fine sanding

Benefits

Flexibility due to the foam back

Tec Line Pro Finish

Net abrasive – 150 mm

Description Net abrasive disc with a Velcro[®] foam back

Area of application

- Perfect for blending
- Matting of surfaces
 Finish
- Wet use (recommended)

Benefits

- Extremely good dust extraction
- in dry use Almost dust-free sanding
- Perfect water transportation in
- wet use

Extremely fine and even sanding pattern

ArtNo.	Specification	SP	MOQ
152.689	P 150	1	5
152.690	P 180	1	5
152.691	P 240	1	5
152.692	P 320	1	5
152.693	P 400	1	5
152.694	P 500	1	5
152.695	P 600	1	5
152.696	P 800	1	5

ArtNo.	Specification	SP	MOQ
152.983	P 1000	20	120
152.984	P 2000	20	120
153.256	P 3000	20	120



Paper abrasive - 230 × 280 mm



Description

Wet sanding paper
 Aluminium oxide grain
 Flexible latex reinforced A-paper

Area of application

Wet sanding of painted surfaces



Benefits

Very high cutting power due to the silicon carbide grain
 Highest flexibility after short soaking time due to the high quality latex reinforced paper

ArtNo.	Specification	SP	MOQ
136.676	P 80	50	500
136.677	P 120	50	500
136.678	P 180	50	500
136.679	P 220	100	1000
136.680	P 240	100	1000
136.681	P 280	100	1000
136.682	P 320	100	1000
136.683	P 360	100	1000
136.684	P 400	100	1000
136.685	P 500	100	1000
136.686	P 600	100	1000
136.687	P 800	100	1000
136.688	P 1000	100	1000
136.689	P 1200	100	1000
136.690	P 1500	100	1000
136.691	P 2000	100	1000

Benefits


Very fine and even sanding pattern

Long lifetime

ArtNo.	Specification	SP	MOQ
136.671	P 600	100	1000
136.672	P 800	100	1000
136.674	P 1200	100	1000



Classicline Soft Pad Foam abrasive – 140 × 115 mm



Double Sanding Soft Pad

Foam abrasive – 120 × 98 × 13 mm



Description

Double-sided soft pad with foam back Coloured aluminium oxide grain

Area of application

- Matting and sanding of hard-to-reach areas, smallest corners, folds and dimples prior to filler or paint application
- Fine: prior to filler application
 Super fine and ultra fine: prior to paint application


Benefits

- Very flexible
 Perfect adaption on every curve
- For wet or dry use
 Colour coding for easy assignment

ArtNo.	Specification	SP	MOQ
158.774	Fine / P320 - P400 / clear	15	15
158.775	Super fine / P400 - P500 / green	15	15
158.776	Ultra fine / P1000 – P1200 / blue	15	15

Topline Soft Pad

Foam abrasive - 140 × 115 mm



15

Description

Soft pad with foam back Aluminium oxide grain

Area of application

- Matting and sanding of hard-to-reach areas, smallest corners, folds and dimples prior to filler or paint application Medium and fine: prior to filler application
- Super fine and ultra fine: prior to paint application
- Benefits
- Very flexible
- Perfect adaption on every curve
 For wet or dry use

ArtNo.	Specification	SP	MOQ
138.924	Medium / P 220 - P 280	40	40
138.925	Fine / P 320 - P 400	40	40
138.926	Super fine / P 400 - P 500	40	40
138.927	Ultra fine / P 800 - P 1200	40	40

Description


- Soft pad with foam backAluminium oxide grain

Area of application

- Matting and sanding of hard-to-reach areas, smallest corners, folds and dimples prior to filler or paint application
- Medium: prior to filler application
 Fine and ultra fine: prior to paint application

- Very fine sanding patternVery flexible
- Perfect adaption on every curve For wet or dry use

ArtNo.	Specification	SP	MOQ
126.251	Medium / P 280 - P 360	40	40
126.252	Fine / P 400 - P 500	40	40
126.253	Super fine / P 600 - P 800	40	40
126.254	Ultra fine / P 1000 - 1200	40	40

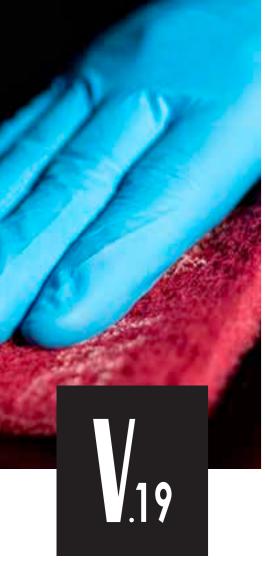





Sanding Fleece V.19

Sanding Fleece - Pad - 115 × 230 mm



Sanding Fleece V.19 Sanding Fleece – Roll – 115 mm × 10 m



Description

Sanding fleece with three dimensional structure

Area of application

Matting of corners, roundings or sharp edges prior to filler or paint application
Red - very fine: prior to filler application
Grey - ultra fine: prior to paint application

Benefits

- High cutting power
 Suitable for wet and dry sanding
 On a roll for easy cut off in the needed lenght

Application advice

Perfectly suitable with the Carsystem matting pastes.

ArtNo.	Specification	SP	MOQ
156.039	Very fine / red	1	10
156.040	Ultra fine / grey	1	10

Sanding Fleece V.19

Sanding Fleece - Disc



Description

- Sanding fleece with three dimensional structure
 The synthetic resin soaks through the fleece and distributes the sanding grain all over

Area of application

- Matting of corners, roundings or sharp edges prior to filler
- Red very fine: prior to filler application
 Grey ultra fine: prior to paint application

Benefits

- High cutting powerSuitable for wet and dry sanding

Application advice

Perfectly suitable with the Carsystem matting pastes.

ArtNo.	Specification	SP	MOQ
156.041	Very fine / red	25	200
156.042	Ultra fine / grey	25	200

Description

- Sanding fleece with three dimensional structure
 The synthetic resin soaks through the fleece and distributes the sanding grain all over

Area of application

- Matting and dust removal on large surfaces by machine
 Red very fine: prior to filler application
 Grey ultra fine: prior to paint application

Benefits

- Removes dust and prepares the surface for filler or paint application
 Suitable for wet and dry sanding

Application advice

Perfectly suitable with the Carsystem matting pastes.

ArtNo.	Specification	SP	MOQ
156.691	Very fine / red / 80 mm	25	1000
156.690	Ultra fine / grey / 80 mm	25	1000
156.044	Very fine / red / 150 mm	20	160
156.045	Ultra fine / grey / 150 mm	20	160

Tec Line Mattflex Premium

Abrasives

Sanding Fleece – Roll – 115 mm × 10 m



Description

The synthetic resin soaks through the fleece and distributes the sanding grain all over

Area of application

- Matting and sanding of hard-to-reach areas, smallest
- corners, folds and dimples prior to filler or paint
- application = Red very fine: prior to filler application
- Grey ultra fine: prior to paint application

Benefits

High flexibility • On a roll for easy cut off in the needed length

Application advice

Perfectly suitable with the Carsystem matting pastes.

			_
ArtNo.	Specification	SP	MOQ
151.616	Very fine / red	1	5
151.617	Ultra fine / grey	1	5

Tec Line Matt Matting Mousse

Matting paste

Description

 Water-based matting paste Colour: Light grey

Area of application

- Blending
- Matting of transition zones
 Degreasing and cleaning of body parts

Benefits

- Suitable for paint or plastic parts
 Sanding, cleaning and degreasing in one step
- Improves the adhesion of the paint layer
 Perfect matting result
- Removes silicones and waxes from the surface

ArtNo.	Specification	SP	MOQ
151.947	1.0 kg	1	6

Tec Line Mattflex Pad

Sanding fleece - Pad - 115 × 230 mm



Description

Sanding fleece with three dimensional structure The synthetic resin soaks through the fleece and distributes the sanding grain all over

Area of application

- Matting and sanding of hard-to-reach areas, smallest corners, folds and dimples prior to filler or paint application
- Red very fine: prior to filler application Black – extra fine: prior to paint appliaction
- Grey ultra fine: prior to paint appliaction especially for
- blending zones = Gold micro fine: prior to paint appliaction especially for blending zones

Benefits

- Extremely fine sanding pattern
- Very thin und extremely flexibleSuitable for wet and dry sanding

Application advice

Perfectly suitable with the Carsystem matting pastes.

ArtNo.	Specification	SP	MOQ
152.686	Very fine / red	25	100
157.444	Extra fine / black	25	100
152.687	Ultra fine / grey	25	100
152.688	Micro fine / gold	25	100

Bite

Matting paste for plastics

Description

- Water-based matting paste Contains natural minerals and special degreasing components for plastics
- Colour: Grey

Area of application

Preparing of plastic parts prior to paint application

Benefits

- Acts very antistatic
- Avoids multiple tempering processes

Application advice

Hard-to-reach areas can be treated with the Carsystem Prep-brush (Art.-No.: 138.301).

ArtNo.	Specification	SP	MOQ
138.807	560 g	1	6

Prep & Scuff

Matting paste

Description

 Water-based matting paste Colour: Light grey

Area of application

- Blending
- Matting of transition zones
 Degreasing and cleaning of body parts

Benefits

- Sanding, cleaning and degreasing in one step
 Improves the adhesion of the paint layer
- Even matting
 Removes silicones and waxes from the surface

Application advice

Hard-to-reach areas can be treated with the Prep-brush (Art.-No.: 138.301).



ArtNo.	Specification	SP	MOQ
137.547	1.3 kg	1	6

Prep-Brush

Special brush

Description

-Stiller

BITE

Special brush for matting pastes

Area of application


For applying matting pastes on hard-to-reach areas



ArtNo.	Specification	SP	MOQ
138.301	4 cm	1	36

PROFLEX Jupiter

Film abrasive - 152 mm - 15 holes



Description

- Ultraflexible soft film disc
- Intrariex bie soft minut
 15 holes
 Aluminium oxide grain

Area of application

- Dry sandingFiller finishBlending
- Matting of surfaces
 Finish

Benefits

- Ultraflexible basis adapts perfectly to the surface
 Surface structure is treated extremely gentle
- Extremely fine sanding pattern
 Reduces the polishing time

Application advice

We recommend the use of the $\mathsf{P}_{\mathsf{ROF}\mathsf{LEX}}$ Interface Pads. We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth.

ArtNo.	Specification	SP	MOQ
154.449	P 600	50	1000
154.450	P 800	50	1000
154.451	P 1000	50	1000
154.452	P 1200	50	1000
154.453	P 1500	50	1000
153.469	P 2000	50	1000
153.470	P 2500	50	1000
153.471	P 3000	50	1000
156.939	P 4000	50	1000

PROFLEX Jupiter

Film abrasive - 75 mm



PROFLEX Jupiter

Film abrasive – 152 mm



Description

Ultraflexible soft film disc Aluminium oxide grain

Area of application

Dry sandingFinish

Benefits

- Ultraflexible basis adapts perfectly to the surface
- Surface structure is treated extremely gentle
 Extremely fine sanding pattern
- Reduces the polishing time

Application advice

We recommend the use of the PROFLEX Interface Pads. We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth.

ArtNo.	Specification	SP	MOQ
154.660	P 1500	50	1000
154.661	P 2000	50	1000
154.662	P 2500	50	1000
154.663	P 3000	50	1000

PROFLEX Jupiter

Film abrasive - 34 mm



Description

- Ultraflexible soft film disc
- Aluminium oxide grain

Area of application

- Dry sanding
- = Filler finish
- Blending
 Matting of surfaces
- = Finish

Benefits

- Ultraflexible basis adapts perfectly to the surface
- Surface structure is treated extremely gentle
 Extremely fine sanding pattern
- Reduces the polishing time

Application advice

We recommend the use of the PROFLEX Interface Pads. We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth.

ArtNo.	Specification	SP	MOQ
154.444	P 600	50	1000
154.445	P 800	50	1000
154.446	P 1000	50	1000
154.447	P 1200	50	1000
154.448	P 1500	50	1000
153.466	P 2000	50	1000
153.467	P 2500	50	1000
153.468	P 3000	50	1000
156.946	P 4000	50	1000

Description

Ultraflexible soft film sanding disc Aluminium oxide grain

- Area of application
- Removing of small scratches and imperfections
- Finish Flattening of removed imperfections

Benefits

- Ultraflexible basis adapts perfectly to the surface
 Surface structure is treated extremely gentle
- Extremely fine sanding pattern
 Reduces the polishing time


Application advice

We recommend the use of the $\mathsf{P}_{\mathsf{ROFLEX}}$ Interface Pads hard ZK/CK. We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth.

ArtNo.	Specification	SP	MOQ
154.440	P 1500	100	2000
154.441	P 2000	100	2000
154.442	P 2500	100	2000
154.443	P 3000	100	2000

PROFLEX Jupiter Soft

Film abrasive – 152 mm – Multi hole



Abrasives

Description

- Ultraflexible soft film disc with flexible foam back
- Multi hole Aluminium oxide grain

Area of application

- = Filler finish
- BlendingMatting of surfaces
- Suitable for dry and wet sanding
 Manual or machine use

Benefits

- Surface structure is treated extremely gentle
 Extremely fine sanding pattern
- Comfortable sanding due to foam back


Application advice

We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth. We recommend using the CS Sanding Water SW20 for wet sanding.

ArtNo.	Specification	SP	MOQ
156.509	P 600	15	300
156.510	P 800	15	300
156.511	P 1000	15	300
156.512	P 1200	15	300
156.513	P 1500	15	300
156.514	P 2000	15	300

PROFLEX Jupiter Soft H₂O

Film abrasive - 152 mm - Multi hole



PROFLEX Jupiter Soft

Film abrasive – 75 mm – multihole



Description

- Ultra flexible soft film disc with flexible foam back
- Multi hole
 Aluminium oxide grain

Area of application

- Matting surfaces
 Suitable for dry and wet sanding
- Manual or machine use

Benefits

- Surface structure is treated extremely gentle
- Extremely fine sanding pattern
 Comfortable sanding due to foam back


Application advice

we recommend an intermediate cleaning of the abrasive surface with a microfiber cloth. We recommend using the CS Sanding Water SW20 for wet sanding

ArtNo.	Specification	SP	MOQ
156.522	P 1500	15	300
156.523	P 2000	15	300

PROFLEX Jupiter Soft H₂O

Film abrasive - 77 mm - Multihole



Description

- Ultraflexible soft film disc with flexible foam back
- Multi hole
- Aluminium oxide grain

Area of application

- = Finish
- Flattening of removed imperfections
 Wet sanding

Benefits

- Surface structure is treated extremely gentle
 Extremely fine sanding pattern reduces the polishing time
- Comfortable sanding due to foam back

Application advice

We recommend using the $\mathsf{P}_{\mathsf{ROFLEX}}$ Jupiter Soft $\mathsf{H}_2\mathsf{O}$ in combination with the CS Sanding Water SW20.

ArtNo.	Specification	SP	MOQ
156.515	P 2500	15	300
156.516	P 3000	15	300
156.517	P 4000	15	300

Description

- Ultraflexible soft film disc with flexible foam back
- Multi holeAluminium oxide grain

Area of application

- FinishFlattening of removed imperfections
- Wet sanding

Benefits

- Surface structure is treated extremely gentle
- Extremely fine sanding pattern reduces the polishing time
 Comfortable sanding due to foam back

Application advice

We recommend using the $P_{RO}F_{LEX}$ Jupiter Soft H_2O in combination with the CS Sanding Water SW20.

ArtNo.	Specification	SP	MOQ
156.524	P 2500	15	300
156.525	P 3000	15	300
156.526	P 4000	15	300



* PROFLEX CALLISTO



LONG ABRASIVE LIFE



EXTREMELY FINE ABRASIVE

NEW



FAST POLISHING

PROFLEX Callisto Foam abrasive - 150 mm



Description

Mineral abrasive grit
 Flexible foam backing

Area of application

- Smooth sanding right before polishing
 Perfect to remove sanding scratches
- Fine re-sanding of imperfections
 Ideally suited for wet sanding


Benefits

- Time saving in the subsequent polishing process
- Long abrasive life
 Gentle and homogeneous matting

ArtNo.	Specification	SP	MOQ
158.797	Grit 3000	15	150
158.798	Grit 6000	15	150

PROFLEX Callisto Foam abrasive - 77 mm

NEW



PROFLEX Callisto Foam abrasive - 33 mm





CARSYSTEM A | PRODUCTCATALOGUE 2023

U25

Description

- Mineral abrasive grit
- Flexible foam backing

Area of application

- Smooth sanding right before polishing
 Perfect to remove sanding scratches
- Fine re-sanding of imperfectionsIdeally suited for wet sanding

Benefits

- Time saving in the subsequent polishing process
 Long abrasive life
- Gentle and homogeneous matting

ArtNo.	Specification	SP	MOQ
158.795	Grit 3000	15	540
158.796	Grit 6000	15	540

Description

- Mineral abrasive grit
 Flexible foam backing

Area of application

- Smooth sanding right before polishing
 Perfect to remove sanding scratches
- Fine re-sanding of imperfections
 Ideally suited for wet sanding

- Time saving in the subsequent polishing process
- Long abrasive life
 Gentle and homogeneous matting

ArtNo.	Specification	SP	MOQ
158.793	Grit 3000	75	2700
158.794	Grit 6000	75	2700

Sanding Water SW20

Sanding water



Abrasives

Description

Sanding water Free of silicones

Area of application

Wet sanding on clearcoat

Benefits

- Extends the lifetime of the abrasive
 Optimizes the wetting of the abrasive
 Foaming prevents the tying of the sanding dust with the
- water


Application advice

We recommend using the Carsystem Sanding Water SW20 in combination with $\mathsf{ProFLex}$ Jupiter Soft $\mathsf{H_2O}$ and all other sanding media.

ArtNo.	Specification	SP	MOQ
157.446	Incl. spray nozzle / 11	1	14
157.447	51	1	4


PROFLEX Neptune Soft

Film abrasive - 130 × 85 mm - Multihole



PROFLEX Neptune

Film abrasive – 130 × 170 mm



Description

- Ultraflexible soft film sanding sheet
- Aluminium oxide grainPerforated in the middle

Area of application

- Filler finishBlending
- Matting and flattening of hard-to-reach areas, smallest corners, folds and dimples

Benefits

Ultraflexible basis adapts perfectly to the surface
 Extremely fine sanding pattern

Application advice

We recommend the use of the $\mathsf{P}_{\mathsf{ROFLEX}}$ Neptune Pads with micro $\mathsf{Velcro}^{\circledast}.$

ArtNo).	Specificatio	on	SP	MOQ
153.472	2	P 600		50	1000
153.473	3	P 800		50	1000
154.454	Ļ	P 1000		50	1000
154.45	5	P 1200		50	1000
153.474	L I	P 1500		50	1000

PROFLEX Neptune Pad MaxGrip

Hand Pad - 120 × 75 × 6 mm - Multihole



Description

- Ultraflexible soft film sheet with flexible foam back
- Multihole
 Aluminium oxide grain

Area of application

- Filler finish
- Blending
 Matting and flattening of hard-to-reach areas, smallest
- corners, folds and dimples
 Suitable for dry and wet sanding

Benefits

- Ultraflexible basis adapts perfectly to the surface
 Extremely fine sanding pattern
 Comfortable sanding due to foam back

Application advice

We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth. We recommend using PRoFLEX Neptune Soft with the Carsystem PROFLEX Neptune Pad MaxGrip. When using wet: We recommend the Carsystem Sanding Water SW20.

ArtNo.	Specification	SP	MOQ
157.791	P 600	20	400
157.792	P 800	20	400
157.794	P 1000	20	400

Description

- Sponge hand pad
- Micro Velcro[®]
- Degree of hardness: Soft Medium

Area of application

Hand pad for all Neptune sanding sheets

- Non-slip
- Ideal for dry and wet sanding with excellent water transport (Neptune Soft)

- Very comfortable feeling
 Adapts perfectly to the surface

ArtNo.	Specification	SP	MOQ
158.097	Soft – medium	1	100

PROFLEX Neptune Pad

Hand pad – 78 × 123 × 5 mm / 78 × 123 × 7 mm



Abrasives

Description

Foam back pad for Neptune sanding sheets

Micro Velcro®
 Two degrees of hardness: Soft + hard

Area of application

Soft = hard-to-reach areas, smallest corners Hard = sanding even surfaces


Benefits

2 degrees of hardness: Soft and hard

ArtNo.	Specification	SP	MOQ
154.175	Soft / 78 × 123 × 5 mm	1	20
154.174	Hard / 78 × 123 × 7 mm	1	20

PROFLEX Mercury

Film abrasive - 29 × 35 mm

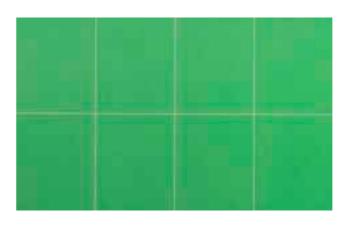

PROFLEX Saturn

Film abrasive – 152 mm – 15 holes

Description

Special film-based sanding disc
 Aluminium oxide grain

Area of application

 Matting and sanding on extra hard clear coat surfaces Wet and dry sanding

Benefits

High aggressiveness Fast removal of surface structure

Application advice

We recommend to wet the surface slightly with Sanding Water SW20.

ArtNo.	Specification	SP	MOQ
153.482	P 800	50	1000
153.483	P 1000	50	1000

PROFLEX Saturn

Film abrasive - 75 mm

Description

Special film-based sanding disc Aluminium oxide grain

Area of application

Matting and sanding on extra hard clear coat surfaces Wet and dry sanding

Benefits

High aggressiveness Fast removal of surface structure

Application advice

We recommend to wet the surface slightly with Sanding Water SW20

ArtNo.	Specification	SP	MOQ
153.485	P 800	50	1000

PROFLEX Mercury Sanding Block

Sanding block – 27 × 33 × 15 mm



Description

- Film-based sanding sheets
- Self adhesive
 Aluminium oxide grain

Area of application

- Removing of imperfections in the surface
- Finish
- Flattening of removed imperfections

Benefits

- Extremely fast removal of imperfections
- Dry use makes the sanding progress immediately visible
- Also suitable for slightly larger areas

Application advice

We recommend the use of the PROFLEX Mercury block soft or hard. We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth.

ArtNo.	Specification	SP	MOQ
154.437	P 1500	200	4000
153.460	P 2000	200	4000
153.461	P 2500	200	4000
153.462	P 3000	200	4000

Description

- Rubber block for the use with PROFLEX Mercury sheets
- Two degrees of hardness: Soft and hard

Area of application


- Soft: Flattening of imperfections (more flexible)
- Hard: Flattening of dust inclusions

- Usable on both sides
- Two degrees of hardness for the whole finish process

ArtNo.	Specification	SP	MOQ
156.555	Soft / red	2	100
154.173	Hard / black	2	100

PROFLEX Pluto

Film abrasive – 34 mm



Description

- Film-based daisy disc
- Self adhesiveAluminium oxide grain

Area of application

- Removing of imperfections in the surface
- = Finish Flattening of removed imperfections

Benefits

Extremely fast removal of imperfections
 Dry use makes the sanding progress immediately visible

Application advice

We recommend the use of the PROFLEX Back Pad PSA for machine sanding and the Pluto Sanding Blocks for manual use. We recommend an intermediate cleaning of the abrasive surface with a microfiber cloth.

ArtNo.	Specification	SP	MOQ
154.428	P 1500	100	6000
154.429	P 2000	100	6000
154.430	P 2500	100	6000
154.431	P 3000	100	6000
154.432	P 4000	100	6000
154.433	P 5000	100	6000

PROFLEX Back Pad PSA

Back pad – 30 mm



PROFLEX Pluto Sanding Block

Sanding block



Description

Rubber block for the use with Pluto daisy discs
Two degrees of hardness: Soft + hard

Area of application

Soft: Flattening of imperfections (more flexible) = Hard: Flattening of dust inclusions


Benefits

Usable on both sides
Two degrees of hardness for the whole finish process.
Rounded edges perfect for smooth roundings.

ArtNo.	Specification	SP	MOQ
156.557	Soft / red	2	100
156.556	Hard / black	2	100

PROFLEX Interface Pad

Interface pad – 150 mm – 15 holes



Description

PSA cellular rubber back pad for PROFLEX Pluto daisy discs

Area of application

- Usable with the CS Mini Sanding Macine
 Usable with the PRoFLEX Pluto daisy discs

Benefits

Perfect balance between cutting power and even sanding pattern in the final sanding process

ArtNo.	Specification	SP	MOQ
155.153	Stick / 1/4" inner thread	2	2

Description

- Interface pads with micro Velcro® for PROFLEX Jupiter
- Interface page with micro vertice of PROFLEX Supsanding discs
 Three degree's of hardness: Soft, medium, hard
 Hard = 5 mm
 Medium and soft = 10 mm

Area of application

- = The micro ${\sf Velcro}^{\circledast}$ allows the use of soft film discs
- PROFLEX Jupiter)
 Soft = finest sanding pattern for final finish sanding
 Medium = balance between cutting power and evenness
 Hard = highest cutting power

- Selection of three different degrees of hardness
 Micro Velcro[®] does not provoke scratches through the soft film abrasive

ArtNo.	Specification	SP	MOQ
154.295	Soft / 10 mm	1	20
154.193	Medium / 10 mm	1	20
155.100	Hard / 5 mm	1	30

PROFLEX Interface Pad

Interface pad – 150 mm



Abrasives

Description

- = Interface pad with micro Velcro® for PROFLEX Jupiter
- anding discs
 2 degrees of hardness: soft + hard
 Thickness: 5 mm

Area of application

- The micro Velcro[®] allows the use of soft film discs
- ProFLEX Jupiter)
 Soft = finest sanding pattern for final finish sanding
 Hard = highest cutting power

Benefits

- Selection of two different degrees of hardness
 Micro Velcro® does not provoke scratches through the

soft film abrasive

ArtNo.	Specification	SP	MOQ
155.101	Soft	1	30
155.099	Hard	1	30

PROFLEX Interface Pad

Interface pad - 30 mm

Description

Interface pad with micro Velcro[®] for PROFLEX Jupiter daisy discs Cellular rubber pad Thickness: 5 mm

Area of application

Usable with the PROFLEX Jupiter daisy discs

Benefits

Hard cellular rubber provides more stability and cutting power Micro Velcro® does not provoke scratches through the soft film



ArtNo.	Specification	SP	MOQ
157.137	Hard / 5 mm	5	500

PROFLEX Interface Pad

Interface pad - 75 mm



Description

- Interface pad with micro Velcro[®] for PROFLEX Jupiter
- sanding discs = Three degrees of hardness: Hard, medium, soft = 10 mm = Medium and soft
- 5 mm = Hard

Area of application

- \blacksquare The micro Velcro $^{\otimes}$ allows the use of soft film discs
- (PRoFLEX Jupiter) Soft = finest sanding pattern for final finish sanding Medium = balance between cutting power and evenness
 Hard = highest cutting power

Benefits

- Selection between three different degrees of hardness
 Micro Velcro® does not provoke scratches through the soft film

ArtNo.	Specification	SP	MOQ
154.296	Soft / 10 mm	1	20
154.194	Medium / 10 mm	1	20
155.098	Hard / 5 mm	1	30

Paint Planer

Paint planer and holder

Description

- Paint planer and holderThe front side of the holder is for
- storing the paint planer The back sides can hold Velcro®
- adhesive daisy discs



Area of application

Removal of paint imperfections

Å	ArtNo.	Specification	SP	MOQ
1	42.995	Paint Planer	1	1
1	42.996	Holder	1	1

- Abrasives

Mini Sanding Discs Grip

Mini sanding discs – Velcro®

Description


- Paper-based daisy disc Wave form
- = Velcro®

Area of application

- For removing paint imperfections, scratches and dust particles
- Flattening of removed imperfections

Benefits

- No sharp edges due to wave form
- Extremely fine sanding pattern



ArtNo.	Specification	SP	MOQ
156.592	P 1500 / 1,000 pcs. / bag	1	5
156.593	P 3000 / 1,000 pcs. / bag	1	5
156.594	P 4000 / 1,000 pcs. / bag	1	5

Fine Block

Fine sanding block

Description

Carbon fine sanding block

Area of application

Removal of bigger paint imperfections e. g. paint drops or large dust inclusions


Benefits

Self sharpening

Application advice

We recommend using the fine sanding block only wet. Soak thoroughly before the initial use for at least 15 min. The fine block should not get dry again after being soaked for the first time.

ArtNo.	Specification	SP	MOQ
140.979	800	1	10
140.980	1500	1	10
140.981	2000	1	10
140.982	3000	1	10

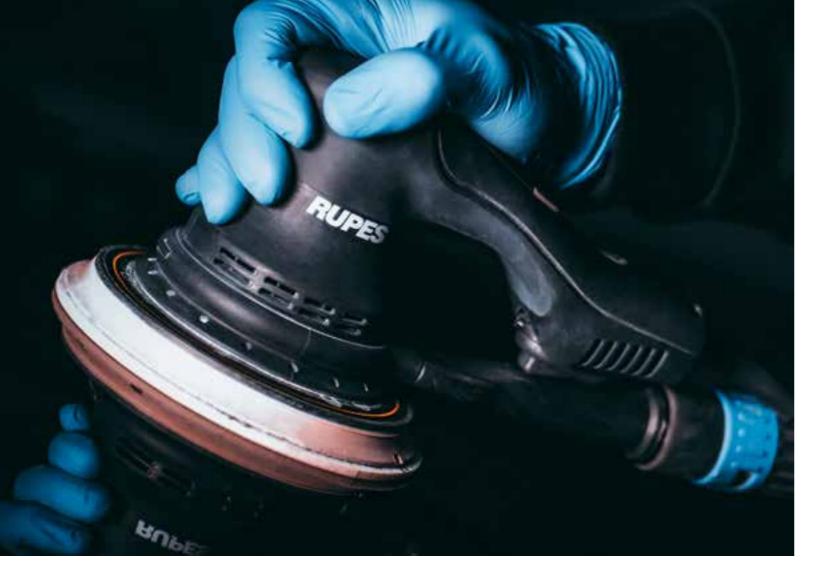

RUPES Skorpio III RH Random orbital sander, pneumatic



RUPES Random Orbital Sander ER

Random orbital sander, electric



Description

- Random orbital sander electric
 3mm / 5mm throw
 Velcro® back pad: 150 mm
 Hole pattern: Multihole
 Adjustable speed up to 10,000 rpm
 Thread: M-8F

ArtNo.	Specification	SP	MOQ
158.283	ER303TE / 3 mm orbital diameter	1	1
158.284	ER305TE / 5 mm orbital diameter	1	1

RUPES Skorpio E RX

Random orbital sander, electric



035

Description

- Proceedings of the second se

ArtNo.	Specification	SP	MOQ
157.334	RH353A / 3 mm orbital diameter	1	1
157.335	RH356A / 6 mm orbital diameter	1	1
157.336	RH359A / 9 mm orbital diameter	1	1

Description

- Electric random orbital single-hand sander
 3 mm / 6 mm orbital diameter
 Ø Velcro[®] back pad: 150 mm
 Adjustable speed up to 10,000 rpm.
 Inner thread: 5/16"
 Power: 250 Watt

I	ArtNo.	Specification	SP	MOQ
	157.326	RX253A / 3 mm orbital diameter	1	1
	157.328	RX256A / 6 mm orbital diameter	1	1

RUPES Random Orbital Sander TA6A

Abrasives

Random orbital sander Triple Action, pneumatic



Description

- Pneumatic random orbital sander
 6 mm orbital diameter
 Ø Velcro® back pad: 150 mm
 Adjustable speed up to 8,000 rpm.
 Thread: M8

ArtNo.	Specification	SP	MOQ
157.339	TA6A / 6 mm orbital diameter	1	1

RUPES Back Pad

Back pad, 150 mm



RUPES Orbital Sander SL42AES

Orbital sander, electric



Description

- Electric orbital sander
 4.8 mm orbital diameter
 Size: 70 × 400 mm
- Adjustable speed up to 7,000 rpm.
 Power: 550 Watt



RUPES Orbital Sander SLP41A

Orbital sander, pneumatic



Description

- Back pad with multi hole pattern
 Strength: Hard
 Thread: M8 and 5/16"
 For TA-ER-BR-RH-machines

ArtNo.	Specification	SP	MOQ
158.291	Rupes 981.500 - M8 / 150 mm	1	10
158.292	Rupes 981.600 / 5/16 " / 150 mm	1	10

Description

- Pneumatic orbital sander
 4.8 mm orbital diameter
 Size: 70 × 400 mm
 Adjustable speed up to 10,000 rpm.

ArtNo.	Specification	SP	MOQ
157.337	SLP41A / 4.8 mm orbital diameter	1	1
157.559	rubber plate 619.153MH / 70 × 400 mm	1	1

RUPES Orbital Sander RE21ALN

Abrasives

Orbital sander, pneumatic



ArtNo.	Specification	SP	MOQ
157.454	RE21ALN / 3 mm orbital diameter	1	1
157.558	Sanding plate 988.001MH / 70 × 198 mm	1	1

RUPES Mini Random Orbital Sander LD30

Mini random orbital sander, pneumatic

Description

Pneumatic mini random orbital sander = 1.5 mm orbital diameter Velcro[®] back pad: 30 mm
 Adjustable speed up to 7,500 rpm.

ArtNo.	Specification	SP	MOQ
157.330	LD30 / 1.5 mm orbital diameter	1	1

RUPES Random Orbital Single-Hand Sander RA75

Random orbital sander, pneumatic

Description

Description

Pneumatic orbital single-hand sander

3 mm orbital diameter
Size: 70 × 198 mm
Adjustable speed up to 11,000 rpm.

- Pneumatic random orbital single-hand sander

- Pheumatic random orbital single-ha
 3 mm orbital diameter
 Ø Velcro® back pad: 75 mm
 Adjustable speed up to 11,000 rpm.
 Thread: 5/16"

ArtNo.	Specification	SP	MOQ
157.333	RA75 / 3 mm orbital diameter	1	1
147.663	Rupes Pad Velcro 5/16" - RA75 soft	1	1



Battery operated mini sanding and polishing machine



Description

- Battery operated mini sanding machine
 Provided with: 12 mm orbital diameter unit and 50 mm
- Velcro® back pad
- Adjustable speed up to 5,000 rpm.
 Running time: Approx. 30 min
- Charging time: Approx. 20 min
 Thread: M14-M



RUPES Random Orbital Sander TA50

Random orbital sander, pneumatic

Description

- Pneumatic mini random orbital
- sander = 3 mm orbital diameter
- Ø Velcro[®] back pad: 50 mm
 Adjustable speed up to
- 15,000 rpm. Thread: M6



ArtNo.	Specification	SP	MOQ
157.338	TA50 / 3 mm orbital diameter	1	1

ArtNo.	Specification	SP	MOQ
157.318	HR81M / STB Ibrid Nano short neck	1	1
157.319	HR81ML / STB Ibrid Nano long neck	1	1
158.370	Polish Pad 9.DA 40S / extrafine / white	6	6
157.718	Polish Pad 9.DA 40M / fine / yellow	6	6
157.717	Polish Pad 9.DA 40H / hard / blue	6	6
157.784	Back pad 995.001C / Velcro® daisy discs / 30 mm	1	1
157.785	Back pad 996.001C / Velcro® daisy discs / 50 mm	1	1
157.786	Back pad 997.001C / Self adhesive daisy discs / 30 mm	1	1
157.787	Rotation unit 562.390	1	1
157.788	Orbital diameter unit / 3mm	1	1

PRODUCTCATALOGUE 2023 CARSYSTEM

RUPES Ibrid Nano Q-MAQ

Battery operated mini sanding and polishing machine



Description

Battery operated random orbital sander

- 2 am orbital diameter
 Ø Velcro[®] back pad: 75 mm
 Adjustable speed up to 5,000 rpm.
- Running time: Approx. 30 minCharging time: Approx. 20 min

ArtNo.	Specification	SP	MOQ
157.320	MAQ HQM83 / STB / Ibrid Nano Q-MAG	1	1
157.644	Back pad / 75 mm	1	1

RUPES Workshop Carrier KC28

Workshop carrier

Description

- Workshop carrier for vacuum
- cleaners 2 Tool holder
- 2 Holders for suction hoses2 Rotating front castors with
- Instanting nonceasions with brakes
 Storage compartment, lockable
- with key
- Working surface with large multipurpose box
 Ergonomic handle



ArtNo.	Specification	SP	MOQ
157.341	KC28	1	1
157.469	Peg board for KC28	1	1

RUPES Compact Vacuum Cleaner SV10E

Compact vacuum cleaner

Description

- Compact vacuum cleaner for extracting dust and sanding dust in the workshop Can be combined with the
- RUPES Carrier for polishes and abrasives Socket for electrical automatic
- switch-on (max. 1,000 W) Selector button for setting the
- suction power
 Tank volume of the dust bag:
- 3.5 kg
- Noice level: 75 dB (A)



RUPES Vacuum Cleaner S145

Vacuum cleaner

- Description
- Movable vacuum cleaner with
- 5 m hose = Tank volume: 45 L = Air flow: 3,400 L/min.
- Noise level: 67 dB (A)
- Power: 1,200 WMax. Power: 2,400 W



ArtNo.	Specification	SP	MOQ
157.464	SV10E	1	1
157.603	Dust bag for SV10E	1	1

ArtNo.	Specification	SP	MOQ
157.343	S145L Profi Vacuum Cleaner	1	1
157.344	S145PL Profi Vacuum Cleaner	1	1
157.471	S145EM Vacuum cleaner	1	1
157.472	S145EPM Vacuum cleaner	1	1
157.560	Dust bag S Serie	1	1

Excenter Classic

Random orbital sander, pneumatic

Description

- Pneumatic random orbital sander without back pad
- 5 mm orbital diamenter
 Thread: 5/16" 24 inner thread



Area of application For corse sanding

Art.-No. Specification SP MOQ Without back pad / 5 mm orbital 139.653 1 1 diameter 146.626 Connecting piece 1 1 139.838 Excenter Classic Service Kit 1 1

RUPES Carrier

Carrier for polishes and abrasives

Description

- Workshop carrier for polishes and
- abrasives 3 Systainer with drawers
- Storage compartment with additional suspension for polishing machines
- Power connection for electric tools
 Impact and shock resistant plastic



ArtNo.	Specification	SP	MOQ
157.342	Carrier	1	1

Finish Sander RC 9332

Random orbital sander 75 mm, pneumatic

Description

- Pneumatic random orbital single-hand sander
- = 2.5 mm orbital diameter
- Adjustable speed up to
- 10,000 rpm Inner thread: 1/4"



ArtNo.	Specification	SP	MOQ
143.388	Incl. back pad / 2.5 mm orbital diameter	1	1

Mini Sanding Machine RC 9330

Mini sanding machine, pneumatic

Description

- Pneumatic random orbital sander for daisy discs incl. 2 back pads (for Velcro® and PSA
- discs) Adjustable speed up to
- 7,500 rpm. Thread: 5/16"

Area of application

Finish sanding with daisy discs
 For Velcro[®] and PSA discs

Mini Back Pad

Finish back pad

Description

- Replacement back pad for mini sanding machine RC 9330 For self-adhesive discs / Velcro®
- discs Inner tread 1/4"



Excenter Back Pad Multi M

Back pad – 150 mm

Description

- Multi-hole excenter back pad
- Degree of hardness: Medium
 Suitable for all commercially available excenter machines Incl. M8 and 5/16" screws and
- Festool special adapter



Universal back pad for dry sanding work

ArtNo.	Specification	SP	MOQ
156.570	Grip	1	100

ArtNo.	Specification	SP	MOQ
143.724	Mini sanding machine / incl. back pad stick and grip	1	1

ArtNo.	Specification	SP	MOQ
144.768	Medium / stick / 28 mm	1	5
144.769	Medium / grip / 28 mm	1	5

Excenter Back Pad T.19

Back pad – 150 mm



Description

- Back pad with Carsystem hole pattern
- 25 holes and oval center hole
 Three degrees of hardness: Soft, medium, hard

Area of application

- Soft = Lowest cutting power highest flexibility
 Medium = Balance between cutting power and flexibility
 Hard = Highest cutting power lowest flexibility

Benefits

Individual due to the 3 different degrees of hardness

ArtNo.	Specification	SP	MOQ
156.564	Soft / grip / M8 and 5/16"	1	100
156.227	Medium / grip / M8 and 5/16"	1	100
156.563	Hard / grip / M8 and 5/16"	1	100

Interface Pad

Interface Pad – 150 mm



Finish Sander Back Pad

Back pad – 77 mm

Description

- Replacement back pad for
- Finish Sander RC 9332 Thread: 5/16" (fixed screw)



ArtNo.	Specification	SP	MOQ
144.917	5/16" UNF connections	1	1

Description

- Interface pad with Carsystem hole pattern
- 25 holes and oval center hole
 The hole pattern is based on the 15 hole pattern and 10 additional holes Thickness: 5 mm + 10 mm

Area of application


- Sanding on all areas with curves, roundings and edges
 Usable with the Carsystem P.19 and F.19 sanding discs

- Perfect adaption to the surface
 Minimizes the risk of sanding through
- The oval middle-hole helps to align the sanding disc

ArtNo.	Specification	SP	MOQ
156.225	10 mm	2	50
156.226	5 mm	2	50

Pad Saver

Interface Pad – 150 mm



Description

Interface pad with multi holes for all common hole systems Thickness: 3 mm

Area of application

The Pad Saver is used as a second Velcro[®] layer

Benefits

■ Saves the original Velcro[®] layer of the excenter back pad

ArtNo.	Specification	SP	MOQ
154.099	Pad Saver / 5 pcs. /bag	1	100

Soft Interface Pad

Soft interface pad - 73 mm




Sanding Block Disc Kit 150

Hand sanding block set - Velcro®



Soft Interface Pad

Interface pad – 150 mm

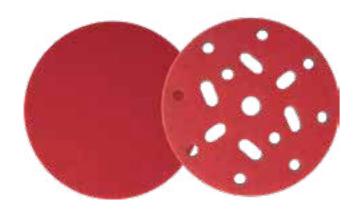

Description

Universal interface pad
Multi hole interface pad for all common hole systems

Area of application

Sanding on all areas with curves, roundings and edges

Benefits

Perfect adaption to the surfaceMinimizes the risk of sanding through

ArtNo.	Specification	SP	MOQ
140.585	Grip / no holes	2	10
140.584	Grip / universal	2	10

Sanding Block 198 Kit Hand sanding block set - Velcro®



4h

Description

Soft interface pad Thickness: 10 mm

Area of application

For all fine sanding

Benefits

- Perfect adaption to the surface
 Provides a fine and even sanding pattern

ArtNo.	Specification	SP	MOQ
144.923	Soft Interface Pad / Grip	1	10

Description

- Set of hand sanding blocks with adjustable dust extraction
 Four exchangeable base plates for flat, concave and convex
- surfaces Multi hole for all common sanding discs

Area of application

Usable with 150 mm sanding discs with Velcro[®]

Benefits

- Four exchangeable base plates for flat, concave and convex
- surfaces = Dust extraction valve adjustable

ArtNo.	Specification	SP	MOQ
151.904	15 holes	1	1

Description

Set of hand sanding blocks with adjustable dust extraction
 Four exchangeable base plates for flat, concave and convex

- surfaces Multi hole for all common sanding strips

Area of application

Usable with Carsystem P.19 sanding strips 70 × 198 mm

Benefits

Four exchangeable base plates for flat, concave and convex surfaces

ArtNo.	Specification	SP	MOQ
148.702	22 holes	1	1

Sanding Block 198 Grip

Hand sanding block - Velcro®



Description

Hand sanding block with dust extraction

Area of application

Usable with Carsystem P.19 sanding strips 70 × 198 mm

ArtNo.	Specification	SP	MOQ
141.962	2 × 4 holes	1	5

Sanding Block Box Grip

Hand sanding blocks - Velcro®



Sanding Block 400 Grip

Hand sanding block – Velcro®



Description

Hand sanding block with dust extraction

Area of application

 Usable with Carsystem P.19 sanding strips 70 × 400 mm and Carsystem N20 net sanding strips

ArtNo.	Specification	SP	MOQ
141.964	2 × 7 holes	1	5

Sanding Block Grip

Hand sanding block - Velcro®



Sanding Block 400 Grip Flex

Hand sanding block – Velcro®



Description

Flexible hand sanding file with dust extraction
 Free variable for concave and convex surfaces

Area of application

 Usable with Carsystem P.19 sanding strips 70 × 400 mm and Carsystem N20 net sanding strips

Benefits

For even, concave and convex surfaces

ArtNo.	Specification	SP	MOQ
150.088	14 holes	1	5

Sanding Block Hard

Hand sanding block – hard



Abrasives 047

Description

- Polyurethane hand sanding blocks
- = Four different blocks, for even, concave and convex surfaces

Area of application

Usable with 150 mm sanding discs with Velcro[®]

Benefits

Sanding blocks for even, concave and convex surfaces

ArtNo.	Specification	SP	MOQ
142.009	Velcro [®] 150 mm	1	16

Description

Polyurethane hand sanding blocks

Area of application

= Usable with 150 mm Velcro[®] discs

ArtNo.	Specification	SP	MOQ
137.439	150 mm	1	6

Description

Hard rubber sanding block

Area of application

Levelling surfacesWet and dry sanding

ArtNo.	Specification	SP	MOQ
137.431	125 mm × 70 mm	1	12

DRY COAT 2.0

STARTERSET

The CARSYSTEM DRY COAT 2.0 STARTERSET is a modification of its predecessor. The applicator is even more ergonomic and comfortable to hold. The sponge is made of very fine-pored material and can be exchanged via Velcro[®]. The control powder is rubbed onto the surface to make structures and defects visible. With the help of the parking area, a sustainable and clean storage is possible.

Dry Coat-black Control powder - black



Dry Coat 2.0 - Starter Set Control Powder black

TARTER



Description

- Finest sanding control powder in a modified edition set Starter-Set: Applicator + fine-foam ring (Velcro®) + 2 × 30 g powder cartridge + storage tray
- Control powder cartridges black Basic-material: Natron lime-borosilicate-glass

Area of application

- Sanding control on putty, filler and primer
- Colour: Black for light surfaces Colour: Orange – for dark surfaces

Benefits

- Makes finest imperfections and pinholes visible Aerosol- and solvent-free / control powder - does not clog the abrasive
- Easy one-hand-application
- Simple cartridge change due to the Velcro foam ring
 Sustainable storage tray (parking area) included
- Individual components can be ordered: foam rings, powder cartridges

Application advice

The control powder reaches deep into all imperfections of the surfaces, so all kind of scratches, pinholes become visible. The Carsystem Dry Coat 2.0 requires no drying time or masking. The control powder can be sanded immediately after application.

ArtNo.	Specification	SP	MOQ
158.486	Starter Set / black / 2 × 30 g incl.	1	8
158.488	Dry Coat 2.0 foam ring set of 2	1	200

Dry Coat-orange

Control powder - orange



Description

Very fine powder, which is rubbed into the pores of the surface - it makes sanding marks and structures visible

Area of application

- Sanding control powder for putty or fillered surfaces
- Black for light substrates

Benefits

- Makes finest scratches, imperfections and pinholes visible
- Solvent-free
- Does not clog the sanding paper
 Powder cartridge is protected in the handle

ArtNo.	Specification	SP	MOQ
128.366	Set incl. 2×30 g refill / black	1	6
158.489	Refill, 2 pcs. / black / 30 g	1	1

Description

Very fine powder, which is rubbed into the pores of the surface - it makes sanding marks and structures visible

Area of application

- Sanding control powder for putty or fillered surfaces
- Orange for dark substrates

- Makes finest scratches, imperfections and pinholes visible
- Solvent-free Does not clog the sanding paper
- Powder cartridge is protected in the handle

ArtNo.	Specification	SP	MOQ
133.849	Set incl. 2 × 15 g refill / orange	1	6
158.490	Refill, 2 pcs / orange / 15 g	1	1

Control-Spray

Sanding control spray



Description

 Black sanding control spray puts a layer of control paint onto the surface to make sanding imperfections visible
 Colour: Black

Area of application

Sanding control of putty or fillered surfaces

Benefits

Makes finest imperfections in the surface visible
 Fast drying, grease and silicone-free

ArtNo.	Specification	SP	MOQ
125.779	400 ml	1	12

Tape Off Tool

Axial sander



Tape Off Disc Premium

Sticker removal disc



Description

Sticker removal discCaramel smell

Area of application

Residue-free removal of stickers, decorative stripes, decals etc.

Benefits

No discoloration of the paint

Application advice Max. 4,000 r/pm

ArtNo.	Specification	SP	MOQ
152.013	90 mm / set of 2 discs + 1 adapter	1	50

Stripping Disc

Raw cleaning disc



051

Description

Pneumatic axial grinder
 Retarded runout

Area of application

Usable with Carsystem Tape Off Discs

Benefits

Reduced speed to avoid damaging the paint

ArtNo.	Specification	SP	MOQ
133.172	1 axial sander	1	1

Description

 Cleaning disc for removing semi-soft materials and paint by machine

Area of application

 Removing of semi-soft materials like underbody coating, stone chip protection, sealing compounds, paint and rust by machine

Benefits

The substrate remains undamaged

Application advice

100 mm = max. 6,000 rpm. 150 mm = max. 4,000 rpm.

ArtNo.	Specification	SP	MOQ
127.999	100 mm	10	10
128.000	150 mm	10	10

SUPER FLEX MULTI *LIGHT* MULTI GREEN RAPID FILL POLYESTER METALLIC SPRAY *PLUS* PLASTIC PRO **DUTTES** GLAS STEEL FASER ALU SPEZIAL CHANGER *ANTI RUST* ELASTIC PUTTY MIX BOARD **SPEEDMIXER** PUTTY KNIFE



Multi

Multifuncional polyester putty





Description

- Multifunctional polyester putty
- Universal putty Colour: Beige

Area of application

For filling small to deep imperfections, dents and scratches

Benefits

Very easy to apply due to its creamy consistency Multi adhesion

ArtNo.	Specification	SP	MOQ
130.857	1.0 kg tin incl. hardener	1	6
127.977	2.0 kg tin incl. hardener	1	6
134.155	1.5 kg cartridge incl. hardener	1	8
132.214	2.9 kg cartridge incl. hardener	1	6
128.145	9.7 kg cartridge incl. hardener	2	2

Multi Silver Light

Multifuncional polyester putty





Multi Light

Multifuncional polyester putty





Description

- Multifunctional polyester putty
- Ultra lightweight puttyColour: Light beige

Area of application

For filling small to medium-sized imperfections, dents and scratches

Benefits

Multi adhesion

ArtNo.	Specification	SP	MOQ
141.503	1.3 kg tin incl. hardener	1	6
142.155	2.2 kg cartridge incl. hardener	1	6
142.156	7.2 kg cartridge incl. hardener	2	2

Multi Plus

Multifuncional polyester putty





Putties

||hh|

Description

- Multifunctional polyester putty
- Lightweight putty
 Colour: Silver

Area of application

For filling small to medium-sized imperfections, dents and scratches

Benefits

- Creates a visually good-looking transition zone due to its
- silver colour Multi adhesion

ArtNo.	Specification	SP	MOQ
140.795	1.5 kg tin incl. hardener	1	6

Description

- Multifunctional polyester putty
- Universal puttyColour: White

Area of application

For filling small to deep imperfections, dents and scratches

- Good balance between being semi-solid and creamy
 Very easy to apply
- Multi adhesion

ArtNo.	Specification	SP	MOQ
138.451	1.6 kg tin incl. hardener	1	6

Multi Soft

Multifuncional polyester putty





Description

- Multifunctional polyester putty
- = Fill and fine putty Colour: Light grey

Area of application

For filling small to deep imperfections, dents and scratches

Benefits

Very easy to apply due to its creamy consistency Multi adhesion

ArtNo.	Specification	SP	MOQ
137.206	2.0 kg tin incl. hardener	1	6

Multi Green Changer

Multifuncional polyester putty





Multi Blue Changer

Multifuncional polyester putty





Description

- Multifunctional polyester putty
- Universal putty Colour: Blue

Area of application

For filling small to deep imperfections, dents and scratches

Benefits

- Colour change during the curing time from blue to grey
 Very easy to apply due to its creamy consistency

Multi adhesion

ArtNo.	Specification	SP	MOQ
157.623	2.0 kg tin incl. hardener	1	6

Multi Green SF

Multifuncional polyester putty styrene-free





Putties

Description

- Multifunctional polyester putty
- Universal putty Colour: Green

Area of application

For filling small to deep imperfections, dents and scratches

Benefits

- Colour change during the curing time from green to yellow
- Reduced surface moisture after curing
 Good balance between being semi-solid and creamy
- Multi adhesion

ArtNo.	Specification	SP	MOQ
157.622	1.6 kg tin incl. hardener	1	6

Description

- Multifunctional polyester putty
- Styrene-freeColour: Green
- Styrene-free putty differs in the typical putty smell

Area of application

 For filling small to deep imperfections, dents and scratches

- Styrene-free
- Very easy to apply due to its creamy consistency
 Multi adhesion

ArtNo.	Specification	SP	MOQ
156.543	1.75 kg tin incl. hardener	1	6

Multi Green Plus 1.0 Super Light

Multifuncional polyester putty





Description

- Multifunctional polyester putty
 Ultra lightweight putty
 Colour: Green

Area of application

For filling small to deep imperfections, dents and scratches

Benefits

- Completely dry surface after curing
- Improved sandability due to the latest filling agents
 Curing time: 12 min / 20 °C objecttemperature
- Multi adhesion

Application advice

First sanding step with P150 possible

ArtNo.	Specification	SP	MOQ
152.357	1.0 kg tin incl. hardener	1	6
152.978	1.6 kg cartridge incl. hardener	1	6

Multi Green Glas

Multifunctional fiberglass reinforced polyester putty





Multi Green

Multifuncional polyester putty





Description

- Multifunctional polyester putty
- Universal putty Colour: Green

Area of application

For filling small to deep imperfections, dents and scratches

Benefits

- Reduced surface moisture after curing
 Good balance between being semi-solid and creamy

Multi adhesion

ArtNo.	Specification	SP	MOQ
146.706	1.6 kg tin incl. hardener	1	6
147.337	2.52 kg cartridge incl. hardener	1	6
149.134	8.11 kg cartridge incl. hardener	1	2

Multi Green Glas Light

Multifunctional fiberglass reinforced lightweight polyester putty





Description

- Multifunctional polyester putty
 Glass fibre reinforced putty
- Colour: Green

Area of application

- = For filling very deep imperfections, for repairing treated
- rust spots and GRP parts Perfectly suitable for GRP repair

Benefits

- Short glass fibres
 Multi adhesion
- Very precise application

ArtNo.	Specification	SP	MOQ
146.707	1.65 kg tin incl. hardener	1	6

Description

- Multifunctional polyester putty
- Glass fibre reinforced ultra lightweight putty
- Colour: green

Area of application

For filling very deep imperfections, for repairing treated rust spots and GRP

- Short glass fibres
 Multi adhesion
- Very precise application Optimized sandability

ArtNo.	Specification	SP	MOQ
158.116	1.3 kg tin incl. hardener	1	6

Multi Green Rapid

Multifuncional polyester putty





Description

Multifuncional polyester putty
 Universal putty

Colour: Green Drying time

= 10 min / 20 °C object temperature

Area of application

For filling small to deep imperfections, dents and scratches

Benefits

Hardly surface moisture after curing
 Improved sandability due to the latest filling agents
 Multi adhesion

ArtNo.	Specification	SP	MOQ
158.233	1.3 kg tin incl. hardener	1	6



Flow

Polyester light filler





Elastic Green

Polyester - fine putty





Description

- Polyester putty
- Fine puttyColour: Green

Area of application

For filling small to medium-sized imperfections, dents and scratches

Benefits

Provides an even surface almost free of poresMinimizes the sanding time

ArtNo.	Specification	SP	MOQ
146.708	2.0 kg tin incl. hardener	1	6

Description

- Universal filler
- Self-leveling, non-porous surfaceColour: Yellow-green

Area of application

For filling small to medium imperfections and scratches

- No surface moisture after curing
 Smooth, pore-free surface
 Easy sanding

ArtNo.	Specification	SP	MOQ
159.013	1.0 kg tin incl. hardner	1	6
158.973	3.3 kg tin incl. hardener	1	4

Soft

Polyester – fill putty





Description

Polyester putty

Fill putty
 Colour: Beige

Area of application

For filling medium-sized to deep imperfections, dents and scratches

Benefits

Easy to apply due to its creamy consistency

ArtNo.	Specification	SP	MOQ
130.853	0.9 kg tin incl. hardener	1	6
127.972	1.8 kg tin incl. hardener	1	6
132.116	2.6 kg cartridge incl. hardener	1	6

Metallic

Polyester - fill putty





Fill Polyester – fill putty





Description

- Polyester putty
- Fill puttyColour: Grey

Area of application

For filling deep to very deep imperfections, dents and scratches

Benefits

Very high filling performance

ArtNo.	Specification	SP	MOQ
127.971	2.0 kg tin incl. hardener	1	6

Alu Spezial

Polyester - hard putty





Putties

Description

- Polyester putty
- Fill putty
 Fill putty
 High density due to aluminum content
 Colour: Silver

Area of application

For filling medium-sized to deep imperfections, dents and scratches

Benefits

Creates a visually good-looking transition zone due to its silver colour

ArtNo.	Specification	SP	MOQ
130.852	1.0 kg tin incl. hardener	1	6
127.911	2.0 kg tin incl. hardener	1	6

Description

- Special polyester putty
- Hard putty
 Extremely high hardness range
 Colour: Light grey

Area of application

- For filling very deep imperfections
 Re-building of edges and bonded aluminum parts

- Replaces the tin application for aluminium
- No sagging of transition zones on bonded replacement parts

ArtNo.	Specification	SP	MOQ
148.524	1.8 kg tin incl. hardener	1	6

Steel

Polyester – hard putty





Description

- Special polyester putty
 Hard putty
 Extremely high hardness
 Colour: Alu grey

Area of application

- Replaces the tin application for welded steel panels
 For filling very deep imperfections
 Re-building of deformed edges

Benefits

- Highly break resistant
 Fast drying







Anti Rust Putty

Anti rust putty





Description

- Special polyester putty
- Anti rust puttyColour: Red brown

Area of application

For filling small imperfections, dents and scratches
 To provide additional rust protection

Benefits

Additional anti rust layer

ArtNo.	Specification	SP	MOQ
149.612	1.8 kg tin incl. hardener	1	6

Elastic beige

Elastic weiss

Polyester - fine putty

Polyester - fine putty





Putties

()65

Description

- Polyester putty
 Fine putty
 Colour: White

Area of application

For filling small to medium-sized imperfections, dents and scratches

Benefits

- Provides an extra fine surface almost free of pores
- Minimizes the sanding effort

ArtNo.	Specification	SP	MOQ
130.856	1.0 kg tin incl. hardener	1	6
127.975	2.0 kg tin incl. hardener	1	6
132.115	3.0 kg cartridge incl. hardener	1	6
132.723	10.0 kg cartridge incl. hardener	2	2

- Polyester putty
- Fine putty
 Colour: Beige

Area of application

For filling small to medium-sized imperfections, dents and scratches

- Provides an extra fine surface almost free of pores
 Minimizes the sanding effort

ArtNo.	Specification	SP	MOQ
130.855	1.0 kg tin incl. hardener	1	6
127.976	2.0 kg tin incl. hardener	1	6

Liquid Putty

Polyester – liquid putty



Description

- Polyester putty
 Liquid putty
 Colour: Beige

Area of application

For filling small imperfections, dents and scratches

Benefits

Provides a perfect result almost free of pores

Self-levelling

ArtNo.	Specification	SP	MOQ
143.496	1.04 kg bottle incl. hardener	1	8

Glas

Polyester - glass fiber reinforced putty





Faser

Polyester - glass fibre reinforced putty



 $\checkmark \ \mathbf{x} \ \mathbf{x} \ \checkmark \ \mathbf{x} \ \checkmark \ \checkmark \ \checkmark$



Description

- Polyester putty
- Special glass fibre putty
 Less fibres and more resin compared to normal glass fibre
- Less indres and indre resiries
 putties
 Colour: Brown transparent

Area of application

- For filling very deep imperfections, for repairing treated rust spots and GRP parts
- Perfectly suitable for GRP repair

Benefits

Extra long glass fibres

ArtNo.	Specification	SP	MOQ
138.443	1.4 kg tin incl. hardener	1	6

Glas White

Polyester - glass fibre reinforced putty





Putties

Description

- Polyester puttyGlas fibre reinforced putty
- Colour: Green

Area of application

- = For filling very deep imperfections, for repairing treated
- rust spots and GRP parts Perfectly suitable for GRP repair

Benefits

Extra long glass fibres

ArtNo.	Specification	SP	MOQ
130.854	1.0 kg tin incl. hardener	1	6
127.974	1.8 kg tin incl. hardener	1	6

Description

- Polyester putty
- Glass fibre puttyColour: White

Area of application

- For filling very deep imperfections, for repairing treated rust spots and GRP parts
 Perfectly suitable for GRP repair

Benefits

Extra long glass fibres

Application advice

White hardener prevents any colour change of the putty surfaces.

ArtNo.	Specification	SP	MOQ
144.808	1.8 kg tin incl. hardener	1	6

Multi Super Flex

Polyester putty highly elastic





Description

- Multifunctional polyester putty
- High elastic putty
 Colour: Dark grey

Area of application

For filling small imperfections, dents and scratches on very flexible plastic parts

Benefits

- No loss of adhesion in the transition zone
- No adhesion primer necessaryMulti adhesion
- Sanding control due to dark colour



Flex

Polyester - plastic putty





Plastic Pro

Plastic putty





Description

- Polyester putty
- Plastic contour puttyColour: Black

Area of application

For filling small imperfections, dents and scratches on plastic surfaces

Benefits

- Outstanding adhesion on plastic surfaces
 No loss of adhesion in the transition zone
- No adhesion primer necessary
- Sanding control due to black colour

ArtNo.	Specification	SP	MOQ
149.613	1.0 kg tin incl. hardener	1	6

Hi Temp

Polyester - High temperature putty





Putties

Description

- Polyester putty
 Plastic contour putty
 Colour: Dark grey

Area of application

For filling small scratches and imperfections on plastic surfaces

Benefits

- Outstanding adhesion an plastic surfaces
- No loss of adhesion in the transition zone
 No plastic primer necessary

ArtNo.	Specification	SP	MOQ
134.796	1.0 kg incl. hardener	1	12

Description

- Polyester putty
- High temperature puttyColour: Grey

Area of application

For filling small to medium-sized imperfections, dents and scratches

- Cured putty can be stoved up to 140 °C
 Provides an even surface almost free of pores
- Minimizes the sanding effort

ArtNo.	Specification	SP	MOQ
157.033	1.7 kg tin incl. hardener	1	6

Carbo Putty

Polyester – carbon putty





Description

- Special polyester putty
 Fill and fine putty
 Colour: Transparent

Area of application

- Base layer on horizontal CRP and wood surfaces to fill
- pores and imperfections Transparent base on carbon parts
- = Can be applied directly to CRP

Benefits

- Provides a surface almost free of pores
- Self-levellingMinimizes the sanding time
- No sagging on carbon parts Improves the top coat quality

ArtNo.	Specification	SP	MOQ
148.018	0.5 kg tin incl. hardener	1	12

Carbo Spray Thinner

Carbo spray thinner



Carbo Spray

Polyester - sprayable putty for carbon parts





Description

- Special polyester putty
- Sprayable puttyColour: Transparent

Area of application

- For filling small to deep imperfections, dents and
- scratches
- Transparent base on carbon parts
 Can be applied directly to CRP

Benefits

- Very high layer thickness possible
- Very even application by spray gun
 No sagging on carbon parts
- Improves the top coat quality
- Art.-No. Specification MOQ SP 148.019 0.820 kg tin incl. hardener 1 6

Spray

Polyester - sprayable putty





Description

Thinner

Area of application

Thinner for Carbo Spray

ArtNo.	Specification	SP	MOQ
148.234	1.0 l tin	1	6

Description

- Polyester putty
- Sprayable putty
 Colour: Grey

Area of application

- For filling deep imperfections, dents and scratches
 Usable on passenger cars, trucks or in exhibition stand construction

Benefits

- Very high layer thickness possible
- Very even application by spray gun

Application advice

We recommend to apply an isolating layer in advance (e.g. acrylic filler 35µ). This isolating layer must not be sanded through. This isolating layer avoids blistering in bad environmental conditions.

ArtNo.	Specification	SP	MOQ
127.978	1.5 kg tin incl. hardener	1	6

Spray Plus

Polyester - sprayable putty



 $\checkmark \ \mathbf{x} \ \mathbf{x} \ \checkmark \ \mathbf{x} \ \checkmark \ \checkmark \ \checkmark$



Description

Colour: Light grey

Area of application

- For filling deep imperfections, dents and scratches
 Passenger cars or trucks and exhibition stand construction
- Additionally usable on CRP panels

Benefits

Very high layer thickness possible

- Very even application by spray gunOptmized drying time and surface structure

Application advice

We recommend to apply an isolating layer in advance (e.g. acrylic filler 35µ). This isolating layer must not be sanded through. This isolating layer avoids blistering in bad environmental conditions.





Тор

Polyester - brushable putty



Spray Thinner

Thinner



Description

Thinner for CS Spray Filler and CS Spray Plus

Area of application

Thinner for polyester spray putty

ArtNo.	Specification	SP	MOQ
124.315	1.0 l tin	1	6

BPO Hardener

Hardener



Description

- Polyester puttyBrushable puttyColour: Beige

Area of application

= For filling very deep imperfections, dents and scratches

Benefits

- High layer thickness possible
- Easy to apply even in hard to reach areas

ArtNo.	Specification	SP	MOQ
127.912	1.5 kg tin incl. hardener	1	6

Description

- BPO hardener paste
 Colour: Red (Standard hardener)
 Colour: Blue (Summer hardener)

Area of application

Hardener for polyester putty

ArtNo.	Specification	SP	MOQ
132.413	Red / 40 g	10	250
127.038	Blue / 40 g	10	10

1K NC Filler

Nitrocellulose - filler





Description

Nitrocellulose filler IK Filler for application with a spatula

Colour: Light grey

Area of application

For filling smallest imperfections, pinholes and stone chip damages

Benefits

Fast drying Multi adhesion

ArtNo.	Specification	SP	MOQ
158.139	Tube / 200 g	1	24

Polyester Repair Resin

Polyester repair resin





Polyester Repair Set

Polyester repair set





Description

- Polyester repair set
- Polyester repair set
 Polyester resin, hardener and glass fibre mat
 Dimension of the glas fabric:
 126.047 = 250 g Set: 12.5 × 50 cm
 126.054 = 800 g Set: 125 × 40 cm

Area of application

For repairing small holes in the surface
For repairing GRP parts

ArtNo.	Specification	SP	MOQ
126.047	Set / 250 g	1	12
126.054	Set / 800 g	1	12

Fill putty

Polyester – fill putty





h

Description

Polyester repair resin

Area of application

- For processing of glass fibre fabric and mats, for repairing small holes in the surface
- For repairing GRP parts

ArtNo.	Specification	SP	MOQ
126.050	1,000 g incl. hardener	1	6

Description

- Polyester putty
- Fill puttyColour: Grey

Area of application

For filling deep to very deep imperfections, dents and scratches

Benefits

Very high filling performance

ArtNo.	Specification	SP	MOQ
124.550	250 g tin incl. hardener	1	12
124.551	500 g tin incl. hardener	1	12
124.552	1,000 g tin incl. hardener	1	12

Fine putty

Polyester – fine putty





Description

Polyester putty
Fine putty
Colour: White

Area of application

For filling small to medium-sized imperfections, dents and scratches

Benefits

Provides a very fine surface almost free of pores Minimizes the sanding time

ArtNo.	Specification	SP	MOQ
124.124	250 g tin incl. hardener	1	12
124.125	500 g tin incl. hardener	1	12
124.126	1,000 g tin incl. hardener	1	12

Glass fibre fabric

300 g per m²



Glass fibre reinforced putty

Polyester - glass fibre reinforced putty





Description

Polyester putty
Glass fibre reinforced putty
Colour: Green

Area of application

- For filling very deep imperfections
 Repairing treated rust spots and GRP parts
 Perfectly suitable for GRP repair

Benefits

Extra long glass fibres

ArtNo.	Specification	SP	MOQ
124.036	250 g tin incl. hardener	1	12
124.038	1,000 g tin incl. hardener	1	12

Glass fibre mat

300 g per m²



Description

- Glass fibre fabric
- Weight: 300 g/m²

Area of application

For covering small holes in the surface on non-bearing parts

Benefits

Simple handling for round parts

Application advice

Usable with polyester repair resin

ArtNo.	Specification	SP	MOQ
125.425	0.5 m ²	1	12
125.426	1.0 m ²	1	12

Description

Glass fibre mat
 Weight: 300 g/m²

Area of application

For covering small holes in the surface on non-bearing parts

Benefits

Stabilizes parts against tensile strength

Application advice

Usable with polyester repair resin.

ArtNo.	Specification	SP	MOQ
125.423	0.5 m ²	1	12
125.424	1.0 m ²	1	12

Glass fibre fleece

40 g per m²



Description

 Glass fibre fleece Weight: 40 g/m²

Area of application For reinforcing and levelling GRP parts

Benefits Simple handling of round or conic parts

Application advice Usable with polyester repair resin.

ArtNo.	Specification	SP	MOQ
125.421	0.5 m²	1	12
125.422	1.0 m ²	1	12

Dualmatic

Putty dispenser – manual



Aluminium mesh

Aluminium repair mesh



Description

Aluminium repair mesh

Area of application

Modelizing of forms before using glass fibre mats or glass fibre fabric

Benefits

Simple handling of edged work pieces

Application advice

Can be adapted to the form of the work piece by bending. Usable with glass fibre putties.

ArtNo.	Specification	SP	MOQ
126.041	25 × 20 cm	1	200

Putty dispenser

Putty dispenser – pneumatic



Description

- Dispenser for 3 kg putty cartridges
 Manual withdrawal
 Wallmounting is recommended

Area of application

Mobile putty dispenser, also suitable for table or wall mount

Benefits

- Perfect ratio between putty and hardener
- Avoids wrong dosage

Application advice

Amount of hardener adjustable (summer / winter).

ArtNo.	Specification	SP	MOQ
123.892	For 3 kg cartidges	1	1
126.854	Handle for Dualmatic	1	1
126.861	Cut off with handle	1	1

- Pneumatic putty dispenser
 For 3 kg and 10 kg cartridges
 Wall mount

Area of application

Pneumatic dispensing of putty and hardener

Benefits

Perfect ratio between putty and hardener Avoids wrong dosage

Application advice

Wall mount only.

ArtNo.	Specification	SP	MOQ
123.859	A 3C	1	1
123.840	A 10C	1	1
136.912	Sealing ring / white plastic sealing plug	1	1

Speedmixer 3 kg

Putty dispenser



Description

Pneumatic putty dispenser For 3 kg putty cartridges

Area of application

Automatic dosing and mixing of filler and hardener

Benefits

- Perfect ratio between putty and hardener
- Avoids wrong dosage Bubble-free putty
- No hand mixing necessary

Application advice

Manual pre-injection of hardener.

ArtNo.	Specification	SP	MOQ
151.017	Speedmixer 3 kg	1	1
146.427	Mixing nozzles green (pack of 100 pcs.)	1	5
152.088	Multi Green slow – Speedmixer / green / 2,523 kg cartridge inkl. hardener	6	6

Putty Mix Board

Putty mix board

Description

Putty mix board
100 tear-offs

Area of application

Supporting plate to mix putty and hardener

Benefits

Big area for putty mixing

Easy disposal of the used tear-off

No cleaning or sanding necessary

ArtNo.	Specification	SP	MOQ
142.206	100 tear-offs / 26 × 22 cm	1	10

Plastic spreader

Description

Area of application

Plastic spreader

Plastic spreader

For mixing and applying putty manually

Benefits

Solvent resistantFlexible

ArtNo.	Specification	SP	MOQ
146.961	115 × 77 mm	100	100

Japanese Putty Knife

Japanese steel blades

Description

Set of steel spreaders = 4 steel spreaders (5, 8, 10 and 12 cm)



Area of application For mixing and applying putty

manually

Benefits Solvent resistant

ArtNo.	Specification	SP	MOQ
139.356	1 Set	1	100

Speedmixer 10 kg

Putty dispenser - electro-pneumatic



Description

Electro-pneumatic putty dispenser
 For 10 kg putty cartridges

Area of application

Automatic dosing and mixing of putty + hardener

Benefits

- Perfect ratio between putty and hardener
- Avoids wrong dosageBubble-free putty
- No hand mixing necessary

Application advice

Fully automatic dispensing of the putty.

ArtNo.	Specification	SP	MOQ
143.347	Speedmixer 10 kg	1	1
146.955	Mixing nozzles / yellow / XL (pack of 100 pcs.)	1	5
143.810	Elastic weiss / very slow / 10 kg cartridge incl. hardener	2	2
144.131	Multi / beige / 9,63 kg cartridge incl. hardener	2	2
143.205	Multi / slow / beige / 9,61 kg cartridge incl. hardener	2	2
145.419	Multi / very slow / beige / 9,61 kg cartridge incl. hardener	2	2
146.808	Multi Light / slow / beige / 6,94 kg cartridge incl. hardener	2	2
147.451	Multi Light / super slow / beige / 6,94 kg cartridge incl. hardener	2	2
149.614	Multi Green / slow / green / 8,18 kg cartridge incl. hardener	2	2

Putty Knife

Steel spreader

Description

Steel spreader with a plastic handle

Area of application

For removing and mixing putties

Benefits

Solvent resistant plastic handle



PUTTIES

ArtNo.	Specification	SP	MOQ
137.435	60 mm	1	12
137.436	80 mm	1	12
137.437	100 mm	1	12

Blacky

Rubber spreader

Description

Rubber plastic spreader

Area of application

For mixing and applying putty manually

Benefits

- Solvent resistant
- Extremely flexible

ArtNo.	Specification	SP	MOQ
137.433	100 × 60 mm	10	10
137.434	80 × 50 mm	10	10

Easy Clean Box

Putty spreader cleaning box

Description

- Putty spreader cleaning box for reusable putty spreaders
- Solvent resistant

Area of application

For fast and easy cleaning of steel, plastic or rubber putty spreaders

Benefits

- Closed container for reduced smell
- Significantly cleaner workplace

Application advice

We recommend the Carsystem H_2O Cleaner for slower evaporation and less smell

ArtNo.	Specification	SP	MOQ
153.206	Spreader cleaning device	1	2



HAND MASK EASY MASK MASKING FILM MASTER TAPE FINE LINE TAPE MASKING PAPER WHEEL COVER FOAMTAPE T-SOFT



Masking Paper Master

Masking paper – Roll



Description

- Special masking paper
- Both sides sealed
- Extremely tight
 Solvent resistant
- = 40 g/m²

Area of application

Masking paper for all masking work

ArtNo.	Specification	SP	MOQ
137.613	20 cm × 450 m	1	150
137.614	60 cm × 450 m	1	60
137.615	90 cm × 450 m	1	37
137.616	100 cm × 450 m	1	34
137.617	120 cm × 450 m	1	30
137.618	150 cm × 450 m	1	30

Masking film yellow

Masking film – Roll



Masking Paper Top II

Masking paper – Roll



Description

- Standard masking paper One side sealed
- = Tight = 40 g/m²

Area of application

Standard masking paper for all masking work

ArtNo.	Specification	SP	MOQ
155.528	20 cm × 450 m	1	150
155.529	60 cm × 450 m	1	60
155.530	90 cm × 450 m	1	37
155.531	120 cm × 450 m	1	30
155.532	150 cm × 450 m	1	30

Masking film blue

Masking film – Roll



h

Description

- Premium masking film
- Extremely thick
- Extension of masking tape possible
 Heat resistant up to 110 °C
- Dust protected in a cardboard box

Area of application

Premium masking film for all masking work

Benefits

- Vehicles with residual moisture
 Extremely tear-proof
 Perfect cutting ability
 Avoids water marks from residual moisture
- High static
- One man use
- Sticks perfectly on the car and can be applied wrinkle-free
 The strong static avoids overspray from crawling under the film

Application advice

Due to the high static we recommend when repositioning, to lift the whole film off the car and re-place it. Very high static properties. For repositioning we recommend to lift the film with two persons.

ArtNo.	Specification	SP	MOQ
155.572	400 cm × 200 m (middle folding)	1	28
155.573	500 cm \times 120 m (middle folding)	1	28
156.948	$600\ \text{cm}\times 100\ \text{m}$ (middle folding)	1	28

Description

- Paint adhesive
- Strongly static
 Heat resistant up to 110 °C
 Dust protected in a cardboard box

Area of application

Vehicles with residual moisture

Benefits

- High staticOne man use
- Sticks perfectly on the car and can be applied wrinkle-free
 The strong static avoids overspray from crawling under the film
- Avoids water marks from residual moisture

Application advice

Due to the high static we recommend when repositioning, to lift the whole film off the car and re-place it. Very high static properties. For repositioning we recommend to lift the film with two persons.

ArtNo.	Specification	SP	MOQ
155.570	400 cm \times 150 m (middle folding)	1	28
155.569	400 cm \times 300 m (middle folding)	1	18
155.571	500 cm \times 120 m (middle folding)	1	28

Masking film green

Masking film – Roll



Description

- Standard masking film
- Paint adhesive
- Strongly static
 Heat resistant up to 110 °C
- Dust protected in a cardboard box

Area of application

Standard masking film for all masking work

Benefits

- High static
- One man use

_

Sticks perfectly on the car and can be applied wrinkle-free
 The strong static avoids overspray from crawling under the film

Application advice

Due to the high static we recommend when repositioning, to lift the whole film off the car and re-place it. Very high static properties. For repositioning we recommend to lift the film with two persons.

ArtNo.	Specification	SP	MOQ
155.565	$400 \text{ cm} \times 300 \text{ m}$ (middle folding)	1	28
155.567	$500\ \text{cm}\times 120\ \text{m}$ (middle folding)	1	45
155.568	$600 \text{ cm} \times 100 \text{ m}$ (middle folding)	1	28

MMIR-Mask Light Green

Masking film – Roll



MMIR-Mask Aqua Tec

Masking film – Roll



Description

- Paint adhesiveSlightly static
- Heat resistant up to 110 °C
 Dust protected in a cardboard box

Area of application

Vehicles with residual moisture

Benefits

Avoids water marks from residual moisture

ArtNo.	Specification	SP	MOQ
151.038	$400~\mbox{cm}\times150~\mbox{m}$ (middle folding)	1	24
152.055	500 cm × 120 m (middle folding)	1	24

Easy Mask

Masking film – Roll

Description

- Masking film
 Slightly static
 Heat resistant up to 110 °C
 Dust protected in a cardboard
- box

Area of application

Standard masking film for all masking work

Application advice Limited paint adhesion



ArtNo.	Specification	SP	MOQ
151.199	380 cm × 200 m (middle folding)	1	40
151.181	400 cm × 150 m (middle folding)	1	45

Description

- Standard masking film
- Paint adhesive
- Slightly staticHeat resistant up to 110 °C
- Dust protected in a cardboard box

Area of application

Standard masking film for all masking work

ArtNo.	Specification	SP	MOQ
150.453	400 cm \times 150 m (middle folding)	1	28
150.454	$400 \text{ cm} \times 300 \text{ m}$ (middle folding)	1	28
150.455	500 cm \times 120 m (middle folding)	1	28
149.587	600 cm × 100 m (middle folding)	1	28

Auto Mask

Handy masking film incl. tape

Description

- Masking film with integrated adhesive tape
 Paint adhesive
 Static

Area of application

- For masking windows, bumpers
- and sills Manual use



ArtNo.	Specification	SP	MOQ
125.476	Refill-roll 0.55 × 33 m	1	40
125.517	Refill-roll 1.80 × 33 m	1	20
133.060	Refill-roll 2.70 × 20 m	1	20

Hand Mask

Handy masking film incl. tape



Masking

Description

 Masking film with integrated adhesive tape Paint adhesive Static

Area of application

For masking windows, bumpers and sills Manual use

ArtNo.	Specification	SP	MOQ
144.547	Roll / 0.35 × 25 m	1	20
144.549	Roll / 0.60 × 25 m	1	16
144.550	Roll / 1.00 × 25 m	1	16
144.551	Roll / 1.20 × 25 m	1	16
144.552	Roll / 1.80 × 25 m	1	16
144.553	Roll / 3.60 × 25 m	1	8

MMIR Knife Premium

Cutter tool

Description

Cutter tool for plastic film
 Coated blade

Area of application

For cutting plastic film



Benefits

Injury protected due to an imbedded blade

ArtNo.	Specification	SP	MOQ
151.513	Film knife	2	2

Protective Film SPF

Surface Protection Film – 60 cm × 20 m



Description

- Surface protection film
- Self-adhesive
 Structured surface has an anti-slip effect

Area of application

Protective film for areas, which need protection against dirt, moisture, paint, oils

- Floors or surfaces in paint mixing rooms
 For smooth and rough surfaces such as wood, concrete
 Aircraft wings during repair and maintenance

Benefits

- Resistant to chemicals and solvents
- Recyclable Can be easily applied and removed without leaving any residue

Application advice

Only for indoor use (no weather resistance). The protective film SPF is not antistatic. We recommend checking the suitability very carefully when using in ATEX areas.

ArtNo.	Specification	SP	MOQ
158.145	60 cm × 20 m	1	1



Liquid masking film



Masking

Master Tape Green

Masking tape

Description

- Allround masking tape
- Solvent resistantWaterproof
- Temperature resistant up to 110 °C / 1h

Area of application

Suitable for all standard masking work

Benefits

Strong initial tack

ArtNo.	Specification	SP	MOQ
149.221	19 mm × 50 m	48	48
149.222	25 mm × 50 m	36	36
149.223	30 mm × 50 m	32	32
149.225	38 mm × 50 m	24	24
149.226	50 mm × 50 m	24	24

Description

- Liquid masking film
- Detergent included Water-based
- Water soluble and solvent resistant
 Colour: Transparent red

Area of application

- Protects the vehicle from overspray, polishing splashes,
- dust and slight mechanical damage

Benefits

- More environmently friendly than a plastic film
 Dries glass clear car can be moved safely in the work shop

Application advice

Ve recommend the application with a new filler gun. Nozzle: 1.9 – 2.2 mm.

ArtNo.	Specification	SP	MOQ
138.718	19 L	1	1



Masking

Master Tape II

Masking tape

Description

- High performance masking tape
- Highly solvent resistantWaterproof
- Temperature resistant up to 120 °C / 1 h

Area of application

- All masking work especially at
- high temperatures

Benefits

Very strong initial tack



Тор Т	ape
-------	-----

Masking tape

Area of application

masking work

Suitable for all standard

Description Standard masking tape Temperature resistant up to 80 °C / 1 h



ArtNo.	Specification	SP	MOQ
140.201	15 mm × 50 m	60	60
140.202	19 mm × 50 m	48	48
140.203	25 mm × 50 m	36	36
140.204	30 mm × 50 m	28	28
140.205	38 mm × 50 m	24	24
140.206	50 mm × 50 m	24	24

ArtNo.	Specification	SP	MOQ
139.262	15 mm × 50 m	60	60
139.263	19 mm × 50 m	48	48
139.264	25 mm × 50 m	36	36
139.265	30 mm × 50 m	32	32
139.266	38 mm × 50 m	24	24
139.267	50 mm × 50 m	24	24

Fine Line Tape Blue

Fine line tape

Description

- Fine line tape PVC base
- Waterproof
- Temperature resistant up to 155 °C / 1 h
- High solvent resistance

Area of application

- Multi colour and design painting
- straight lines
- = Suitable for masking work on rubber and plastic

ArtNo.	Specification	SP	MOQ
140.083	3 mm × 33 m	10	10
140.084	6 mm × 33 m	10	10
140.085	9 mm × 33 m	10	10
140.086	12 mm × 33 m	10	10
140.087	19 mm × 33 m	10	10

Slim Tape

Special masking tape

Description

- Special masking tape
- Special paper base Extremely thin
- Waterproof
- Temperature resistant up to 100 °C / 1 h

Area of application

- Suitable for difficult surfaces e.g. rubber, plastics, door
- openers and chromed parts "Last tape" before painting

Benefits

- High curve stability
- Perfect cutting ability

ArtNo.	Specification	SP	MOQ
133.827	18 mm × 50 m	10	160

Slim	Таре	Green
Special	masking	tape

- Description
- Special masking tape Special paper base
- Extremely thin
- Waterproof Temperature resistant up to
- 100 °C / 1 h

Area of application

Suitable for difficult surfaces e.g. rubber, plastics, door openers and chromed parts "Last tape" before painting

Benefits

Small and handy, fits into every pocket

High curve stability
 Perfect cutting ability

Art.-No. Specification SP MOQ 150.081 200 18 mm × 18 m 8





Benefits

High adhesion on a multitude of

ArtNo.	Specification	SP	MOQ
147.753	50 mm × 50 m	1	18

Fabric tape Description

Fabric tape

= Waterproof

Black Tape

Temperature resistant up to 80 °C / 3h

Area of application

- Usable for different masking
- Sanding edge protection
- Support tape for glued parts

surfaces



surfaces

Benefits

Highly flexibleDoes not stretch when unrolled

Masking

Silver Tape

Fabric tape

Description

- Fabric tape
- WaterproofTemperature resistant up to
- 80 °C / 3 h

Area of application

- Usable for different masking work Sanding edge protection
- Support tape for glued parts

Benefits

High adhesion on a multitude of surfaces

_				
l	ArtNo.	Specification	SP	MOQ
	138.532	38 mm × 50 m	1	24
	135.715	50 mm × 50 m	1	18

WR-Lifting Tape Premium

Masking tape with plastic edge - perforated

Description

- Special tape
- Perforated maskig tape with a
- plastic edge Waterproof
- Temperature resistant up to 120°C/1 h

Area of application

 For masking window sealings, lip seals, front and back lights and indicators

Benefits

- 2 in 1, lenght wise perforated masking tape with a plastic edge in 9 mm and 11 mm
- Tape and plastic edge are perforated for easy tear off Paint edge disappears under the sealing

Application advice

We recommend to tear off from plastic to tape.

ArtNo.	Specification	SP	MOQ
155.734	Perforated / 9 + 11 mm × 10 m	1	24



WR-Lifting Tape

Masking tape with plastic edge

Description

- Special tape Masking tape with a plastic edge
 Waterproof
- Temperature resistant up to 120 °C / 1h

Area of application

Art.-No.

155.720

 For masking window sealings, lip seals, front and back lights and indicators

Benefits

Paint edge disappears under the sealing

Specification

9 mm × 10 m

SP

1

MOQ

24

WM	Таре
Adhesi	ve Tape

Description Packaging tape

Area of application

For sealing packages



Foam Tape

Foam tape



- 1	ArtNo.	Specification	SP	MOQ
	140.794	50 mm ×66 m	6	36

Foam Tape T-Soft

Foam tape



Description

- Special foam tape
- Silicone-free glue
 Temperature resistant up to 80 °C / 1h

Area of application

For closing gaps on doors, bonnets and trunk lids
 Protects inner areas from overspray

Benefits

- Avoids hard paint edges
 Easy placement
 Perfect edge finish
 No glue residues

ArtNo.	Specification	SP	MOQ
157.974	25 m	1	1

Tec Line Stick

Sensor pad



Description

- Foam tape
- Silicone-free glue
 Temperature resistant up to 80 °C / 1h

Area of application

- For closing gaps on doors, bonnets and trunk lids
 Protects inner areas from overspray

Benefits

Avoids hard paint edges

ArtNo.	Specification	SP	MOQ
148.861	13 mm × 50 m	1	140
148.862	19 mm × 35 m	1	84

Description

- Covers for parking sensors
- PET plastic
 Temperature resistant: -40 °C up to +180 °C
 Solvent resistant

Area of application

- For covering parking sensors or key holes
 Protection against sanding, painting and polishing

Benefits

- Time savingNo dismantling of parking sensors

Application advice

We recommend to remove the sensor cover while the paint is still liquid to avoid paint edges.

ArtNo.	Specification	SP	MOQ
152.553	150 pcs. / box / 12 mm	1	50
152.554	150 pcs. / box / 18 mm	1	50

Felgo Tape

Rim masking tape



Description

- Different dimensions for different rim sizes
- Composite backing film provides additional protection for
- the tire during the sanding process
 Temperature resistance: Approx. 60 °C / 1h

Area of application

Masking of rims before sanding and painting process

Benefits

- Clean, easy and safe masking of the tire up to the edge of the rim Extremely hard-wearing special tape for additional
- protection of the tire during the sanding process

Application advice

Cleaning of the tire and rim ONLY with water or water-based cleaner.

ArtNo.	Specification	SP	MOQ
156.986	15 inch	50	4000
156.987	16 inch	50	4000
156.988	17 inch	50	4000
156.989	18 inch	50	4000
156.990	19 inch	50	4000

Floor Mats

Foot space protection



Area of application

Description

For protecting the foot space

Protection mats for the car floor

- during the car repair
 Protects against water, dust, oil and paint

ArtNo.	Specification	SP	MOQ
142.941	370×500 mm / 500 pcs. / roll	1	1

Wheel Cover

Aluminum sealed fabric Dust and waterproof

Cover hood

Description

Cover hood for car wheels Paint and heat protection

Fast masking of wheels before painting Protects car wheels from dust

and overspray

Area of application

ArtNo.	Specification	SP	MOQ
142.483	17 inches / 1 pack = 4 pcs.	4	56
158.211	20-21 inches / 1 pack = 4 pcs.	4	56

Seat Covers

Seat protection

- Description
- Seat protection covers for vehicle seats
- Non-slip backside
 500 pcs per roll
- Extremely tear resistant

Area of application

- For protecting seats during the car repair
 Protects against water, dust, oil and paint

ArtNo.	Specification	SP	MOQ
142.940	820 × 1,300 mm / 500 pcs. / roll	1	1

Steering Wheel Covers

Steering wheel protection

Description Protection for the steering wheel

Area of application

For protecting the steering wheel during the car repair
Protects against water, dust, oil and paint

ArtNo.	Specification	SP	MOQ
142.942	Set incl. hand dispenser / 6 × 250 m / roll	1	1

Wall Bracket

Wall Bracket for interior protection rolls

Description

- Wall bracket for Carsystem Seat Covers and Floor Mats interior protection rolls
- Space to store 3 rolls



ArtNo.	Specification	SP	MOQ
143.334	wall bracket	1	1

2K CARBO CLEAR PLUS RALLYE-SPRAY MULTI-MIX CUPS CC.21 X-PRESS FIVE ACRYL THINNER SPEED PLUS ELASTIC IIVE MIXING STICKS AD UV CLEAR PAIN DUST KEEPER ING AF.21 X-PERT PLASTIC PRIMER ACTIVATOR HPP PRIMER CC.20 X-PERT BOOTH MASK INTERFACE PAD PAINT SYSTEM CPS 1K EPOXY PRIMER 2K HIGH-SPEED KLARLACK 2K FILLER WET ON WET PLUS **BUMPER PAINT SPRAY**



2K Clear VOC Speed Plus

2K Clear coat



Description

2K Acrylic clear coat Premium quality
 VOC compliant

Drying time

= 15 min / 60 °C object temperature

Area of application

All common paint works from spot repair to full vehicle

Benefits

- Very fast drying
- Very last dying
 Brilliant gloss
 Very good surface quality
 Very user friendly
 Extremely wear resistant

Application advice

We recommend a fast and efficient way of working for complete paint jobs.

ArtNo.	Specification	SP	MOQ
152.563	A+B comp. / 1.5 L	1	12
151.899	A comp. / 5.0 L	1	4
151.901	Hardener / 2.5 L	1	4

CC.20 X-pert

2K clear coat



CC.21 X-press FIVE

2K Clear coat



Description

- = 2K Acrylic clear coat
- Premium qualityVOC compliant

Drying time

= 5 min / 60 °C object temperature

Area of application

For small to medium paint work

Benefits

- Extremely fast drying time
 Excellent gloss and flow properties
 Very user-friendly
 Very good surface quality

ArtNo.	Specification	SP	MOQ
158.251	A+B comp. / 1.5 L	1	12
158.249	A comp. / 5 L	1	4
158.250	Hardener / 2.5 L	1	4

2K Clear VOC Premium

2K Clear coat



Description

- 2K Acrylic clear coat
- All-purpose clear coat
 VOC conform

Drying time

= 20 min. / 60 °C object temperature

Area of application

All common paint work in a paint shop from individual parts up to full vehicle paintings

Benefits

- Fast drying time
 Very high final hardness
 Brilliant gloss

Application advice

We recommend a fast and efficient way of working for complete paint jobs.

ArtNo.	Specification	SP	MOQ
158.423	A + B Comp. / 1.5 L	1	12
157.450	A comp. / 5 L	1	4
157.451	Hardener / 2.5 L	1	4

- 2K Acrylic clear coat
- Universal clear coatVOC compliant

Drying time

= 30 min / 60 °C object temperature (hardener standard)

Area of application

= All common paint works from spot repair to full vehicle

Benefits

Good surface quality
 Long pot life

ArtNo.	Specification	SP	MOQ
146.714	A-comp. / 5 L	1	4
147.019	Hardener standard / 2.5 L	1	4
147.361	Hardener slow / 2.5 L	1	4
147.862	Hardener fast / 2.5 L	1	4

2K Clear VOC 420

2K Clear coat



Description

2K Acrylic clear coat Universal clear coat
 VOC compliant

Drying time 30 min / 60 °C object temperature (hardener standard)

Area of application All common paint works from spot repair to full vehicle

Benefits

High final surface hardness

ArtNo.	Specification	SP	MOQ
144.138	A-comp. / 1.0 L	1	12
144.140	Hardener 420 standard / 0.5 L	1	12
144.139	Hardener 421 fast / 0.5 L	1	12
142.953	A-comp. / 5.0 L	1	4
144.449	Hardener 422 slow / 2.5 L	1	4
144.107	Hardener 420 standard / 2.5 L	1	4
144.108	Hardener 421 fast / 2.5 L	1	4
144.446	Hardener 423 very fast / 2.5 L	1	4

2K Clear VOC CC.19 AS

2K Clear coat

Description

- 2K Acrylic clear coat Industrial clear coatVOC compliant

Drying time

- = 25 min. / 60 °C object temperature
- Area of application
- Small parts and spot repair

Benefits

Especially high initial hardness
 High UV, chemical and mechanical resistance

12	
8	-
6	BYSTEH
10	CLEAN VOC
4	CCHAN
~	-

Contraction of the local division of the loc

ArtNo.	Specification	SP	MOQ
156.931	A+B comp. / 1.5 L	1	12

2K Clear VOC HS-SR

2K Clear coat



Description

- 2K Acrylic clear coat
 Universal industrial clear coat
- VOC compliant

Drying time

= 30 min / 60 °C object temperature (hardener standard)

Area of application

= All common paint works from spot repair to full vehicle

Benefits

High scratch resistanceHigh initial hardness directly after curing

ArtNo.	Specification	SP	MOQ
153.223	A+B comp. / hardener slow / 1.5 L	1	12
153.774	A+B comp. / hardener standard / 1.5 L	1	12
151.909	A-comp. / 5.0 L	1	4
151.910	Hardener standard / 2.5 L	1	4
151.911	Hardener fast / 2.5 L	1	4

2K Carbo Clear Plus

2K Carbo clear coat



2K Clear VOC Matt

2K Clear coat matt

Description

- 2K Acrylic clear coat matt
 Matt level: Matt 148.983
 Matt level: Silk-matt 148.986
- VOC compliant

Drying time

= 30 min / 60 °C object temperature (hardener standard)



ArtNo.	Specification	SP	MOQ
148.983	A-comp. matt / 1.0 L	1	12
148.986	A-comp. silk-matt / 1.0 L	1	12
148.985	Hardener standard / 0.5 L	1	12
148.984	Hardener fast / 0.5 L	1	12
		•	

Description

- 2K Acrylic clear coat
- Premium clear coat for carbon surfaces
 VOC compliant

Drying time

= 15 min. / 60 °C object temperature

Area of application

Special clear coat for carbon parts

- Very fast drying time
 Brilliant gloss
 Very good surface quality
 Very user friendly
 Extremely wear resistant
 High UV protection

ArtNo.	Specification	SP	MOQ
153.217	A-comp. / 1 L	1	12
153.218	Hardener / 0.5 L	1	12
153.207	A-comp. / 5 L	1	4
153.208	Hardener / 2.5 L	1	4

UV Clear

Transparent UV Clear coat



Description

UV clear coat

Clear coat for dip application VOC compliantColour: Transparent

Drying time

= 30 - 60 sec. (CS UV lamps)

Area of application

= Filling of pinholes, small scratches and stone chips in the clear coat

Benefits

Extremely time savingPerfect solution for spot repairs

ArtNo.	Specification	SP	MOQ
154.528	100 ml	1	20

EF.21 EP-Filler

2K Hybrid Füller



UV Filler Spray

UV Filler Spray

Description UV Filler spray

Colour: Transparent-grey

Area of application Spot repair

Filling of small parts

Benefits

= 100% rust protection Extremely time saving

Application advice

On plastic substrates, the Carsystem plastic primer must be applied first. On steel, aluminium and galvanized steel the Carsystem Etch Primer or 1K Epoxy Primer must be applied first.

ArtNo.	Specification	SP	MOQ
154.190	400 ml	1	6

AF.21 1K Filler 1K Hybrid filler

Description = 1K Hybrid filler - acrylic / epoxy VOC compliantColour: Grey

Drying time = 10 min / 60 °C object temperature

Area of application

- For isolating putty spots
- Painting of new parts
 Filling of plastic parts with direct adhesion without applying a primer first (except PE & PP)

Benefits

FILLER

ALL MADE

SPRAY

tion to the

- = 100% rust protection
- Very user friendly
 Very good sandability



AF.2

AF.21 X-pert

2K Acrylic Filler



Description

- = 2K Hybrid filler acrylic / epoxy
- Universal filler
- Colour: yellowish (approx. RAL 7032)
 VOC compliant

Drying time

- Standard: 30 min / 60 °C objecttemperature
- Wet on wet: 30 min / 20 °C objecttemperature

Area of application

All common filling works from spot repair to full vehicle Adhesion to steel, aluminium, KTL, old and new coatings on and under polyester puttys

Benefits

- Settable as wet on wet
- High corrosion resistance
- Excellent sandability
- Chromate free

ArtNo.	Specification	SP	MOQ
158.248	A+B comp. / 1.5 L	1	12
158.246	A-comp. / 5 L	1	4
158.247	Hardener / 2.5 L	1	12

Description

- 2K Acrylic filler
- Universal filler VOC compliant

Drying time

- Standard: 25 min. / 60 °C object temperature
 Wet-on-wet: 25 min. / 20 °C object temperature

Area of application

- All common filling works from spot repair to full vehicle
 Very good adhesion to steel, aluminium, e-coat primers
- and polyester fillers Painting new parts with e-coat primers
- Anti corrosions protection

- Settable as wet-on-wet
- Excellent sandability
- Layer thickness can be flexibly adjusted (from low to very high layer thickness)
- Application on e-coat primers without sanding

ArtNo.	Specification	SP	MOQ
158.216	A-Comp. / white / 3.6 L	1	4
158.218	A-comp. / grey / 3.6 L	1	4
158.219	A-comp. / black / 3.6 L	1	4
158.220	Hardener / 0.9 L	1	4
158.221	Thinner standard / 1 L	1	12
158.222	Thinner wet-on-wet / 1 L	1	12

2K VOC Filler 540

2K Acrylic filler



Description

- 2K Acrylic filler
- Universal filler
 VOC compliant

Drying time

= 30 - 45 min / 60 °C object temperature (hardener standard)

Area of application

All common paint works from spot repair to full vehicle

Benefits

High filling power
Variable due to three different hardeners
Winter hardener CT available for low temperatures (cold

temperature)

ArtNo.	Specification	SP	MOQ
144.541	A+B comp. / hardener very fast / white / 1.25 L	1	12
147.432	A+B comp. / hardener standard / grey / 1.25 L	1	12
144.539	A+B comp. / hardener very fast / grey / 1.25 L	1	12
144.540	A+B comp. / hardener very fast / black / 1.25 L	1	12
149.816	Hardener / very fast / 0.25 I	1	24
144.354	A-comp. / white / 3.6 L	1	4
144.026	A-comp. / grey / 3.6 L	1	4
144.353	A-comp. / black / 3.6 L	1	4
144.977	Hardener VOC 541 / standard / 0.9 L	1	12
144.027	Hadener very fast / 0.9 L	1	12
153.493	Hardener VOC 541 CT / 0.9 L	1	12

2K Filler Air Plus

2K Acrylic filler



2K Filler Vario Plus

2K Acrylic filler



Description

- 2K Acrylic filler
 High build filler
 Colour: Light grey
 VOC compliant

Drying time

Normal layer: 30 - 35 min / 60 °C object temperature
High build: 45 min / 60 °C object temperature

Area of application

- All common paint works from spot repair to full vehicle
 Also usable as a high build filler
 Filler: 60 to 180 μ
 High build filler: 85 to 255 μ

Benefits

 Very high filling power
 The filler can be variably adapted by adding up to 30 % thinner

ArtNo.	Specification	SP	MOQ
152.058	A+B comp. / light grey / 1.2 L	1	12
152.057	A-comp. / light grey / 3.5 L	1	4
147.682	Hardener / 0.7 L	1	12

2K Filler Wet on Wet Plus

2K Acryl filler



Description

2K Acrylic filler VOC complaint

Drying time

= 15 - 20 min / 60 °C object temperature

Area of application

- Perfectly suitable for small parts, spot repair and air
- drying All common paint works from spot repair to full vehicle

Benefits

- Fast air-drying
 Very good sandability

ArtNo.	Specification	SP	MOQ
152.580	A + B comp. / grey / 1.25 L	1	12
152.416	A-comp. / white / 3.6 L	1	4
152.417	A-comp. / grey / 3.6 L	1	4
152.418	A-comp. / black / 3.6 L	1	4
152.419	Hardener / 0.9 L	1	12

Description

- 2K Acrylic filler
- Wet on wet fillerVOC complaint

Drying time

- Wet on wet: 15 20 min / 60 °C object temperature
 Sanding filler: 20 min / 60 °C object temperature

Area of application

Painting new parts

- Application on e-coat primers without sanding
 Rust protection on bare metal parts

ArtNo.	Specification	SP	MOQ
153.455	A+B-comp. / grey / 1.05 L	1	12
153.456	A-comp. / grey / 3.6 L	1	4
153.457	Hardener / 0.6 L	1	12

Tinting paste filler

Tinting paste

Description

Tinting paste

Area of application

Tinting paste for Carsystem acrylic fillers Max. addition: 1 – 5 %

Benefits

For matching the filler to the basecoat shade

Application advice

Mix tinting paste and A-component first before adding the hardener to avoid adhesion problems.

ArtNo.	Specification	SP	MOQ
148.505	Red / 0.5 L	1	30
148.504	Black / 0.5 L	1	30

Elastic Additive

Elasticizer

Description Elastic additive Colour: Transparent

Area of application

- Additive for Carsystem acrylic fillers and clear coats For painting flexible substrates
- Addition up to 20 % Benefits
- Improvement of flexibility Minimizes the risc of cracks

Application advice

Mix additive and A-component first before adding hardener to avoid adhesion problems

ArtNo.	Specification	SP	MOQ
155.543	1L	1	12

SYSTEM

Activator

Reaction accelerator

Description

Reaction accelerator additive

Area of application

 Additive to speed up the drying process of Carsystem fillers and clear coats

 Max. addition in fillers: 10 % Max. addition in clear coats: 2 %

Benefits

Accelerates the drying time about 15 %

Application advice

Only usable with standard or slow hardeners to avoid adhesion problems or matting.

ArtNo.	Specification	SP	MOQ
147.695	1L	1	12

-

SYSTEM

-

High Gloss Additive

High gloss additive

Description High gloss additive
 Colour: Transparent

Area of application Additive for all Carsystem clear coats

Benefits Improves gloss and surface quality

Art.-No.

152.788

Application advice Mix High Gloss Additive and A-component first before adding the hardener to avoid adhesion problems.



SP

1

MOQ

12


- -

Acryl Thinner

Acrylic thinner

For all Carsystem fillers and clear





Multi-Mix Cup

Disposable mixing cups



Specification

1L

- Description Acrylic thinnerColour: Transparent Area of application
 - coats

Spotblender

Blending thinner

Description

Blending thinner

Area of application

For homogeneous transition zones between old and new paint for 1K and 2K clear coats and 2K top coats



ArtNo.	Specification	SP	MOQ
148.989	1L	1	12

PAINTING

Description

Disposable mixing cups

Area of application

For clean and accurate mixing of all fillers, base coats, clear coats etc.

Application advice

Use only the scale of the mixing cup and not the scale of a measuring stick. Cups are conic so there could be a difference.

ArtNo.	Specification	SP	MOQ
140.545	Cup / 385 ml	200	200
140.546	Cup / 750 ml	200	200
140.547	Cup / 1400 ml	200	200
140.548	Cup / 2300 ml	100	100

Multi-Mix Lids

Disposable lids

Description Lids for disposable Multi-Mix Cups

Area of application

For sealing the Carsystem Multi-Mix Cups For storing residual material in

the Multi-Mix Cups

ArtNo.	Specification	SP	MOQ
140.549	Lid / 385 ml	200	200
140.550	Lid / 750 ml	200	200
140.551	Lid / 1400 ml	200	200
140.552	Lid / 2300 ml	200	200

Dispenser Multi-Mix

Wall bracket for Multi-Mix Cups

Description

Dispenser for Multi-Mix Cups Area of application For Carsystem Multi-Mix Cups

Benefits

NEW

Space-saving storage Protection against contamination from the environment



ArtNo.	Specification	SP	MOQ
137.664	0.385 L	1	1
137.665	0.75 L	1	1
137.666	1.4 L	1	1
137.667	2.3 L	1	1

Paint System CPS

Disposable paint cup system



Description

Disposable paint cup system

Area of application

For processing water-based and solvent-based paint systems

Benefits

Upside down painting is possible

Clean work due to mixing in the painting cupStorage of residual material is possible

Application advice

We recommend to empty the paint channel before removing the cup: Hold the gun upside down, close the nozzle and pull the trigger briefly. The paint channel is now completely empty and the cup can be removed without dripping.

ArtNo.	Specification	SP	MOQ
158.056	Set / 400 ml – 125 μm / 50 pcs.	1	1
158.057	Set / 600 ml – 125 μm / 50 pcs.	1	1
158.067	Set / 800 ml – 125 μm / 26 pcs.	1	1
158.063	Adapter A7 Devilbiss	1	1
158.064	Adapter A5 Iwata W400 + Sata external thread	1	1
158.065	Adapter A87 Iwata WS400	1	1
158.066	Adapter A82 Sata QCC	1	1
158.718	Adapter A17 Walcom EGO / SLIM	1	1
158.717	Adapter A19 Walcom GEO / HTE	1	1
158.059	Lids / 200-400 ml / 125 µm / 25 pcs.	1	1
158.475	Lid / 200-400 ml / 190 µm / 25 pcs.	1	1
158.061	Lids / 600-800 ml / 125 µm / 25 pcs.	1	1
158.062	Lids / 600-800 ml / 190 µm / 25 pcs.	1	1
158.472	Hard cup / 400 ml	1	5
158.473	Hard cup / 600 ml	1	5
158.474	Hard cup / 800 ml	1	5

Plastic Can Empty

Paint tins

Description

Plastic paint tin Solvent resistant Tacky labels included

- Area of application Stock of solvent and water
- based paint Long stock life due to the airtight closing lid

Benefits

Hard and very stable plastic tin
Airtight lid prevents content from

drying out

ArtNo.	Specification	SP	MOQ
144.957	100 pcs. per carton / 0.5 L	100	100
144.958	100 pcs. per carton / 1.0 L	100	100
145.784	100 pcs. per carton / 1.8 L	100	100

Mixing Stick Alu

Measuring stick

Description

Aluminium based stir and

- measuring stick Printed scale with different
- mixing ratios

Area of application

- For stiring and mixing of paint
- materials For measuring the right mixing
- amounts of Carsystem fillers and clear coats

Application advice

To use only with cylindric containers

ArtNo.	Specification	SP	MOQ
146.695	2:1 / 4:1 / 370 × 32 mm	1	100
147.359	5:1 / 6:1 / 370 × 32 mm	1	100

Multi Strain

Paint strainer

Description

Disposable paint strainer
 Paper funnel with precise nylon

based filter = Dust free



- Area of application
- = Filtration of all common painting materials

ArtNo.	Specification	SP	MOQ
146.957	Blue / 125 µ	125	1000
146.958	Yellow / 190 µ	125	1000



÷84.

Multi-Mix Bucket

Paint mixing bucket

Description

Disposable paint mixing bucket with a handle

Area of application

For mixing bigger quantities of paint material

Benefits

Very stable Antistatic



ArtNo.	Specification	SP	MOQ
144.649	36 pcs. per carton / 5.5 L	1	1
145.315	Lid / 5.5 L	1	1

Mixing Stick Black

Plastic mixing stick

Description

- Plastic mixing stick
- Solvent resistant

Area of application

- For easy stiring and mixing of paint materials
- Nicely flexible

ArtNo.	Specification	SP	MOQ
144.752	23 × 1.8 cm	100	100

Dispenser for paint strainers

Dispenser

Description

Dispenser for paint strainers
 Space for 150 paint strainers

Area of application

For paint strainers

Benefits

Space-saving solution Protection against contamination from dust and overspray



ArtNo.	Specification	SP	MOQ
146.960	Dispenser	1	1

Booth Mask White

Booth protection mask



Description

- Booth protection maskColour: White
- Water-based Forms a highly opaque, shiny film

Area of application

 Protects the spray booth walls against overspray
 Perfectly suitable for paint booths which cannot be cleaned with water

Benefits

- Covers all existing paint residues
 Provides perfect light conditions
 Forms a high layer thickness
 Easy to remove

Application advice

We recommend a nozzle size of 2.2 - 2.5 mm.

ArtNo.	Specification	SP	MOQ
153.205	19 L	1	1

Booth Mask Stick

Booth protection mask



Booth Mask

Booth protection mask



Description

- Booth protection mask
- Colour: Transparent Water-based
- Provides a transparent-clear, tack free protection film

Area of application

- Protects booth walls and lightings against overspray
 Perfectly suitable for lightings and paint booths which cannot be cleaned with water
- Benefits

- BiodegradableClear-transparent
- Does not influence the light conditions
 Protects for 3 month or 150 paint cycles
 Forms a tack free film, which can be peeled off

Application advice

We recommend a nozzle size of 1.8 - 2.2 mm.

ArtNo.	Specification	SP	MOQ
149.358	5 L	1	4
149.359	20 L	1	1

Dust Keeper

Dust binding agent



Description

- Booth protection mask
 Colour: Transparent
 Water-based
 Provides a clear, tacky protection film

Area of application

- Protects booth walls and lightings against overspray
 Perfectly suitable for booth walls
 Absorbs the overspray

Benefits

- Biodegradable
 Dust and lints stick on the tacky film
 Water soluble

Application advice

We recommend a nozzle size of 1.8 - 2.2 mm.

ArtNo.	Specification	SP	MOQ
149.338	5 L	1	4
149.339	20 L	1	1
149.340	25 L	1	1

Description

- Dust binding agent for the floor
- Colour: Transparent
 Water-based

Area of application

- Application on the spay booth floor to hold down the dust
 For show rooms e. g. car dealers

Benefits

Improved paint quality by reducing the dust inclusions

Application advice

We recommend using a pump spray bottle.

ArtNo.	Specification	SP	MOQ
149.341	5 L	1	4

S.21 2K High-Speed Clear Coat

2K Spot repair clear coat

Description 2K Acrylic clear coat spray Colour: Transparent

Area of application For painting small parts

Especially suitable for spot repair

Benefits

No spray gun application necassary Very fine atomisation
Long pot life (approx. 14 h after activation)



2K Spot-repair clear coat

Description 2K Acrylic clear coat spray Colour: Transparent

Area of application For painting small parts Especially suitable for spot repair

Benefits No spray gun application necessary

Very fine atomisation
Long pot life (approx. 24 h after activation)



ArtNo.	Specification	SP	MOQ
157.795	250 ml	1	6

ArtNo.	Specification	SP	MOQ
149.421	400 ml	1	6

Spotblender Spray

Blending thinner spray

Description Blending thinner spray
 Colour: Transparent

Area of application For homogeneous transition zones in the blending area of 1K and 2K clear coats as well as top coats

Benefits No spray gun application necessary



ArtNo.	Specification	SP	MOQ
145.987	400 ml	1	12

2K Epoxy Fill Primer

2K Spot-repair epoxy primer

Description

= 2K Epoxy filler spray Colour: Light grey

Area of application

Art.-No.

149.424

For primering small parts Especially suitable for spot repair


Benefits

Variable spray nozzle Perfect adhesion and rust protection properties Free of isocyanate

S.21 Spotblender

Blending paint spray Colour: Transparent

Area of application



Benefits

Very good solving ability No spray gun application necessary



ecification	SP	MOQ	ArtNo.	
400 ml	1	6	157.762	

ArtNo.	Specification	SP	MOQ
157.762	400 ml	1	6

S.21 Plastic Primer

Plastic Primer

Plastic primer spray

Description

Colour: Silver-transparent

Area of application

For all car and truck plastic parts inside and outside

Suitable for spot repairs

Slight silver pigmentation highlights primed areas

Benefits

Application advice

Can be used on the following plastics: PP, PP/ EPDM, ABS, SAN, PUR-RIM, R-TRU, PPO, PBT, PUR flexible foam, UP-GF plastics. Not suitable for PE and PC

ArtNo.	Specification	SP	MOQ
157.759	400 ml	1	6

Sp



Blending paint spray Description

Plastic Cleaner

Plastic cleaner

Description

- Plastic cleaner spray
- Colour: Transparent

Area of application

- For all car and truck cleaning inside and outside
- Removes dirt, fat, oil, silicone, wax, tar and glue residues
- Suitable for spot repairs

Application advice

Not an interiour cleaner Only for plastic surfaces prior to painting



ArtNo.	Specification	SP	MOQ
145.985	400 ml	1	12

Plastic Primer

Plastic primer

Description

- Plastic primer spray
- Colour: Transparent

Area of application

= For all car and truck plastic parts inside and outside Suitable for spot repairs

Application advice

Can be used on the following plastics: PP, PP/EPDM, ABS, SAN, PUR-RIM, R-TRU, PPO, PBT, PUR flexible foam, UP-GF plastics. Not suitable for PE and PC.



ArtNo.	Specification	SP	MOQ
145.986	400 ml	1	12

HpP Primer

1K Plastic primer



Benefits

- Extremely time saving
 No pretreatment of the plastic surfaces necessary
 Cleaning with alcohol-based plastic cleaner is mandatory

Application advice

We recommend for the cleaning of plastic parts the Carsystem ISO-VE 7030 cleaner. Not suitable for PE/PC.

ArtNo.	Specification	SP	MOQ
154.706	White / 1 kg	1	12
154.707	Grey / 1 kg	1	12
154.708	Black / 1 kg	1	12
154.712	Thinner / 1 L	1	12

1K Epoxy Primer

1K Epoxy primer



Description

IK Plastic primer

Special primerWet on wet primer for plastic parts

Drying time

Wet on wet 15 min / 20 °C object temperature

Area of application

Prior to painting of solvent resistant uncoated plastic parts (e.g. PP, PVC, EPP, PP-EPDM)

S.21 1K Primer

1K filling primer



Description

1K Primer spray Filling primer

Area of application

- Spot and partial paintings
 Isolating of sanded through spots
 Overpaintable with water and solvent based paints
- Overpaintable wet on wet

Benefits

- Rust protection
 Primer and filler in one step
 Free of chromates

ArtNo.	Specification	SP	MOQ
158.107	White / 400 ml	1	6
158.108	Grey / 400 ml	1	6
158.109	Black / 400 ml	1	6

1K Easy Primer

1K Filling primer



Description

- IK Epoxy primer spray
- Colour: Grey

Area of application

- Spot and partial paintings
 Isolating of sanded through spots
- Overpaintable with water and solvent based paints

Benefits

- Highest possible rust protection
 Perfect isolation against moisture
 UV resistant

Application advice

Damaged areas on metal substrates must be thoroughly cleaned with silicone remover. When used as a primer, we recommend to apply a 2K filler on top. When used in several layers or in high layer thickness, overpainting can be done wet on wet with water or solvent based paints.

ArtNo.	Specification	SP	MOQ
151.958	400 ml	1	12

Description

IK Primer spray

Area of application

- Spot and partial paintings
 Isolating of sanded through spots
 Overpaintable with water and solvent based paints
 Overpaintable wet on wet

- Rust protection primer and filler in one step
 Weldable
- Free of chromate

ArtNo.	Specification	SP	MOQ
151.537	White / 400 ml	1	12
151.538	Grey / 400 ml	1	12
151.539	Black / 400 ml	1	12

S.21 1K Filler 1K High build primer



Description

= 1K Acrylic filler spray High build primer

Area of application

Spot and partial paintings

- Filling small spots prior to painting
- Overpaintable with water and solvent based paints

Benefits

- High filling and opacity power
 Time saving compared to the use of a spray gun
 Suitable for wet and dry sanding

Free of chromates and lead

ArtNo.	Specification	SP	MOQ
157.763	White / 400 ml	1	6
157.764	Lightgrey / 400 ml	1	6

Replacement Spray Head

Replacement Spray Head adjustable

Description

- Replacement spray head adjustable Suitable for:
- 1K Epoxy Primer
 1K Easy Primer
- IK Easy Filler



ArtNo.	Specification	SP	MOQ
153.793	Replacement Spray Head adjustable	1	300

1K Easy Filler

1K High build primer



Description

IK Acrylic filler spray High build primer

Area of application

Spot and partial paintings

Filling small spots prior to painting
 Overpaintable with water and solvent based paints

Benefits

- High filling and opacity power
 Time saving compared to the use of a spray gun
 Suitable for wet and dry sanding
 Free of chromate

ArtNo.	Specification	SP	MOQ
151.522	Lightgrey / 400 ml	1	12
151.523	Black / 400 ml	1	12

Primer Spray

Primer spray

Description

Primer sprayAlkyd resin-based

Area of application Primer for all paint works

Benefits

Very good rust protection properties



ArtNo.	Specification	SP	MOQ
125.949	Red brown / 400 ml	1	12
132.907	Grey / 400 ml	1	12

Primer Surfacing Spray

Primer spray

Description

- Primer spray
 Nitro-combi-based
 Colour: Grey
- Area of application
- Primer for all paint works

Benefits

 Good rust protection properties Weather resistant



ArtNo. Specification		SP	MOQ
126.024	400 ml	1	12

Etch Primer

Primer

Description

- Rust protection sprayColour: Grey

Area of application

- Specific for repairing of original primers on aluminum car bodies
- Isolating of sanded trough spots
- Adhesion promoter on all steel, zinc, aluminum substrates for spot and partial paintings

- Easy to use
- Fast flash off and drying time



ArtNo.	Specification	SP	MOQ
143.028	400 ml	1	6

Spray Filler Spray

Spray filler

Description

- Spray putty aerosol
- Acryl-basedColour: Grey

Area of application

Levelling of small imperfections and isolating polyester putty layers

Benefits

- Outstanding high filling power
 Short drying time
- Quickly sandable

Art.-No.

125.580



S.21	Zind	c-Sp	oray
------	------	------	------

Rust protection

Description

Rust protection spray Colour: Darkgrey
Temperature resistant up to 400 °C

Area of application

- Rust protection for the body interior in spot
- welding = Cold galvanizing of metal surfaces



SP

1

MOQ

6

Specification	SP	MOQ	ArtNo	. Specification
400 ml	1	12	157.761	400 ml

Rallye-Spray Premium

Paint spray – black matt

Description

Acrylic paint sprayColour: Black matt

Area of application Repair of imperfections in the paint Paint application on new parts

Benefits High opacityFast drying



ArtNo.	Specification	SP	MOQ
149.218	500 ml	1	6

Zinc Spray

Rust protection

Description

Rust protection spray
Colour: Grey
Temperature resistant up to 490 °C (acc. DIN50976, 53167, 50021, 53151)

Area of application

Art.-No.

126.030

Rust protection for the body interior in spot welding
 Cold galvanizing of metal surfaces

Rallye-Spray Premium

Paint spray – black glossy

- Description
- Acrylic paint spray Colour: Black glossy

Area of application

Repair of imperfections in the paint Paint application on new parts

Benefits

High opacityFast drying Polishable



Description Acrylic paint spray Colour: Black matt

Area of application Repair of imperfections in the paint

Rallye-Spray matt

Paint spray – matt

Benefits

Fast drying



ArtNo.	Specification	SP	MOQ
126.027	400 ml	1	12

Specification

400 ml



SP

1

MOQ

12

ArtNo.	Specification	SP	MOQ
149.219	500 ml	1	6

		- 10



Rallye-Spray gloss

Paint spray – gloss

Description

Acrylic paint spray

Area of application

Repair of imperfections in the paint

Benefits

- Fast drying
- Polishable



ArtNo.	Specification	SP	MOQ
126.053	White glossy / 400 ml	1	12
126.026	Black glossy / 400 ml	1	12

Thermo-Spray

Paint spray – heat resistant

Description

Silicone resin based paint spray
 Temperature resistant up to 650 °C

Area of application

Protects parts in the engine compartment and exhaust pipes

Benefits

Extremely high temperature resistance



ArtNo.	Specification	SP	MOQ
126.086	Black / 400 ml	1	12
126.087	Silver / 400 ml	1	12

Silver Wheel

Silver wheel spray

Description Acrylic paint spray Colour: Silver

Area of application For painting steel rims

Benefits Abrasion resistant

Weather resistant

Art.-No.

126.021

Specification

400 ml



Clear Coat Spray

Paint spray - transparent

Description IK Clear coat spray Colour: Transparent-glossy

Area of application Spot repair

Benefits Fast drying and polishable



SP

MOQ

1 12

SP	MOQ	ArtNo.	Specification	
1	12	126.025	400 ml	

Bumper Structurant Spray

Bumper structurant spray black

Description

Acrylic structurant paint spray
 Colour: Black

Area of application

- Repairs and renewals of old, faded out or damaged
- plastic parts = Re-forms the structure close to the original

Benefits

No plastic primer needed No spray gun application necessary



ArtNo.	Specification	SP	MOQ
142.982	400 ml	1	12

Bumper Paint Spray

Bumper spray

Description Acrylic paint spray

Area of application Repairs and renewals of old, faded out or damaged

plastic parts

Benefits No plastic primer needed

Art.-No.

142.820

142.821

No spray gun application necessary

Application advice Usable on PP, PP/EPDM, ABS.

Bumper Paint

Structurant paint for plastics

Description Acrylic structurant paintColour: Black

Area of application Repairs and renewals of old, faded out or damaged plastic

parts Re-forms the structure close to the original

Benefits

No plastic primer needed Can beapplied directly to the plastic without prior priming



Specification SP MOQ Grey / 400 ml 1 6 1 Black / 400 ml 6

BUMPER

UNTS/

ArtNo.	Specification	SP	MOQ
147.447	1.0 L	1	12

Prefill-Spray	Water
---------------	-------

Aerosol tin – fillable

Description

- Pre-fill paint spray
 Filled with 300 ml propellant, solvent and
- additives To be filled with 100 ml of paint

Area of application

= Fillable with water based paint

Benefits

Replaces a spray gun in spot repairs



ArtNo.	Specification	SP	MOQ
140.608	Without pin / 300 ml	1	12

Prefill-Spray

Aerosol tin – fillable

Description

- Prefill paint spray
 Filled with 275 ml propellant, solvent and additives
 To be filled with 100 ml of paint

Area of application

Fillable with solvent based paint

Benefits

Replaces a spray gun in spot repairs

Application advice Filling machine required



ArtNo.	ArtNo. Specification		MOQ
125.686	Without pin / 275 ml	1	12

Spray Head

Replacement spray head red

Description

 Replacement spray head red
 Suitable for: Prefill Spray and Prefill Spray Water




ArtNo.	Specification	SP	MOQ
145.840	Spray nozzle spare part / red	1	100

Spray Out Cards Metal

Colour match card Description

Colour match cards metal

Area of application Colour matching



Color Mate	ch Card	Paper
-------------------	---------	-------

Colour match card Description Colour matching card
Paper based-kit with 250 pcs. incl. holder Area of application Colour matching Disposable cards

Application advice Not suitable for water-based paint. Control of opacity



Magnetic Gun Holder

Paint gun holder

Description

Magnetic paint gun holder

Area of application

- Holder for paint guns Can be fixed on ferromagnetic
- surfaces



ArtNo.	Specification	SP	MOQ
140.145	Magnetic Gun Holder	1	5

ArtNo.	Specification	SP	MOQ
153.758	200 pcs. per box / white	1	5
153.759	200 pcs. per box / dark grey	1	5

ArtNo.	Specification	SP	MOQ
141.109	70 × 179 mm	1	24

Touch Up

Paint bottle – fillable 20ml

Description

Plastic based paint bottle with a brush

 Including mixing ball made of stainless steel and brush

Area of application

Can be filled with paint Repairing of stone chips and scratches in the surface

Benefits

Unbreakable

ArtNo.	Specification	SP	MOQ
150.764	Transparent / 20 ml × 100 pcs.	1	1

Touch Up

Paint bottle – fillable 50ml

Description Plastic based paint bottle with a brush Including mixing ball made of

Area of application

Can be filled with paint Repairing of stone chips and scratches in the surface



Benefits Unbreakable

glass

Art.-No. Specification MOQ 150.769 Transparent / 50 ml × 25 pcs. 1 1



Dust needle

Description

Dust needleContent: 10 pcs.Inclusive holder

Area of application

For removing particles or lints from resh painted surfaces

ArtNo.	Specification	SP	MOQ
140.971	Set	1	10
140.972	Needles in blister / 10 pcs.	10	5000

PG - FG Feinfilter

Fine filter

Description

= Fine filter

Area of application

Paint filters for use in SATA gravity flow cup

ArtNo.	Specification	SP	MOQ
138.680	Bag with 10 pcs.	10	10

Brush Set

Set of brushes

Description

- Set of small brushes
- Content: 3 sizes /
- 12 pcs. per size No. 4 / No. 6/No. 8

Area of application

For repairing imperfections, stone chips etc.



ArtNo.	Specification	SP	MOQ
140.970	Set	1	10



Paint Arrestor

Paint mist separator

Description

Paint mist separator

 Glass fibre basis with elastic fibre structure
 Temperature resistant up to 100°C

Area of application

Paint filter for paint boothsSeparation of paint mist

Specification SP MOQ Art.-No. 142.891 500 mm × 20 m 3" 1 1 500 mm × 91 m 3" 1 142.894 1 142.898 660 mm × 20 m 3" 1 1 142.901 760 mm × 20 m 3" 1 1 142.902 760 mm × 25 m 3" 1 1 1 1 142,903 760 mm × 91 m 3" 860 mm × 91 m 3" 142.906 1 1 1 1 142.910 1000 mm × 20 m 3" 142.911 1000 mm × 25 m 3" 1 1 142.912 1000 mm × 50 m 3" 1 1 1000 mm × 91 m 3" 142.913 1 1 1 142.917 1250 mm × 91 m 3" 1 142.919 1530 mm × 25 m 3" 1 1

Micro Tip

Repair tip

Description

 Micro repair sticks with a micro fibre head

Area of application

 For filling stone chips, silicone funnels and scratches in the varnish

Application advice

Perfectly suitable with the UV Clear.

ArtNo.	Specification	SP	MOQ
140.976	Box with 100 pcs.	1	1

Air hose

Air hose coil

- Description
- Antistatic rubber air hose Size: 9 × 16 mm
- Lentgh: 50 m
- Max. air pressure: 12 bar
 Inner tube: Smooth EPDM black
- Outer tube: Smooth EPDM black
 Outer tube: Smooth EPDM blue

Area of application

Air supply for spray guns and air driven tools

ArtNo.	Specification	SP	MOQ
143.131	9 × 16 mm / 50 m length	50	50



MS Coupling

MS Coupling

Description

MS Coupling



ArtNo.	Specification	SP	MOQ
139.036	Ø 9 mm	1	1

Nippel Nipple with inner thread	
Description Air supply nipple with inner tread	1-H-

ArtNo.	Specification	SP	MOQ
139.034	1/4 "	1	10

Safety Coupling

Safety coupling with quick connector

Description

 Air savety coupling for quick connectors



ArtNo.	Specification	SP	MOQ
143.128	Ø 6 mm	1	1
143.127	Ø 9 mm	1	1

Nippel

Nipple for quick connector

Description

 Air connection nipple for quick connectors



ArtNo.	Specification	SP	MOQ
143.130	Ø 6 mm	1	1
143.129	Ø 9 mm	1	10

Nippel

Nipple with outer thread

Description

- Air supply nipple with conic, outer
- thread Teflon coated



ArtNo.	Specification	SP	MOQ
139.033	1/4 "	1	10

FINISH QUADRA PAD C-WAX C-80 POLISH-FINE STEP 2 POLISH C-30 FINISH LAMBSWOOL RUPES POLISHING MACHINE POLISH C-10 STRONG MICRO FIBER CLOTH PAINT FINISH POLISH C-05 CUT REFINISH POLISH FOAM FINISH CONTROL FOAM C-99 FINISH WAFFLE FOAM FINISH BACK PAD NANO CARNAUBA WAX POLISH C-07 CUT POLISH-COARSE STEP 1 POLISH WAFFLE FOAM FINISH FOAM



Polish C-05 cut

High performance grinding polish

Paint Finish



Polish C-07 cut High performance grinding polish



Description

High performance grinding polish

- Water-based
- Free of silicones = Colour: Green

Area of application

- Extremely fast removal of defects on fresh and completely
- hardened top coats = Especially developed for fresh and used paint surfaces

Benefits

Extremely high grinding performance Good deep shine

Application advice

We recommend using the Carsystem Polish Foam Green. We recommend using the Carsystem C-30 subsequently on dark paints.

ArtNo.	Specification	SP	MOQ
156.345	1 kg	1	6

Polish C-10 strong

High performance grinding polish



Polish C-30 finish

Anti hologram polish



Description

- High-performance grinding polish
- Water-basedFree of silicones
- = Colour: Yellow

Area of application

- Very fast removal of defects on fresh and completely hardened
- top coats Especially developed for fresh and used paint surfaces

Benefits

- Very high grinding performanceVery good deep shine

Application advice

We recommend using the Polish C-07 Cut in combination with the CS Polish Foam Yellow.

ArtNo.	Specification	SP	MOQ
157.445	1 kg	1	6

Description

- High performance grinding polish
- Water-based
- Free of siliconesColour: White

Area of application

- = Fast removal of imperfections in fresh and completely
- hardened top coats Especially developed for fresh and used paint surfaces

Benefits

- High grinding performance
- Extremely good deep shinePolishing on a low temperature level

Application advice

We recommend using the Carsystem Finish Quadra Pad C10.

ArtNo.	Specification	SP	MOQ
151.634	1 kg	1	6

Description

- Anti hologram polish
- Water-based
- Free of silicone
- Colour: Grey

Area of application

- Removal of finest scratches, swirl marks and holograms on
- dark paints
 Perfect as the last finishing step

Benefits

- Very effective removal of holograms without streaks
 Perfect deep shine
- Low dusting
 Good material displacement

Application advice

We recommend to use it with Carsystem Finish Foam White AH, Finish Sandwich Pad C-30 or Finish Foam Black AH.

ArtNo.	Specification	SP	MOQ
151.636	1 kg	1	6

Paint Finish

C-Wax C-80

High gloss finish sealer



Finish Control Foam C-99

Control Foam



Description

Water-based high gloss finish sealer Free of silicones

Area of application

- Sealing of painted surfaces Protects the paint from weathering, fingerprints and slight
- mechanical damage
- Perfectly suitable as assembly protection in industry or car
- dealerships Can be applied by hand or machine

Benefits

- Very good resistance to alkaline cleaners and environmental
- influences
- Extremely smooth surface
 Long-lasting protection
- Brilliant deep shine Very quick and easy to use

Application advice

We recommend using the Carsystem $\ensuremath{\mathsf{Wax}}$ Puck.

ArtNo.	Specification	SP	MOQ
158.243	500 g	1	10



Nano Carnauba Wax



Refinish 1

Grinding polish

Description

Grinding polishFree of silicones

surfaces

Area of application

Removal of scratches, dust inclusions and orange peel from fresh and old paints Especially suitable for faded and old paint



ArtNo.	Specification	SP	MOQ
132.437	880 ml	1	12

Description

- Micro Foam-Spray
- Water-based Free of silicones
- = Colour: White

Area of application

For checking and cleaning between the polishing steps

Benefits

Removes oily and waxy residuesMakes any remaining sanding marks visible

Application advice

Finish Control Foam C-99 should be removed with a microfiber cloth after a short exposure time.

ArtNo.	Specification	SP	MOQ
156.614	400 ml	1	12

Description

- High gloss wax with nano technology
- Water-based
- Free of siliconesColour: Yellow
- Area of application
- Sealing of paint surfaces
 Protects the paint from weathering

Benefits

- Dirt repellent
- Provides a deep, mirror-like shine

Application advice

We recommend the application with the Carsytem Wax Puck.

ArtNo.	Specification	SP	MOQ
151.945	1.0	1	6

Refinish Restorer

Plastic conditioner

Description

- Plastic conditione

- Air drying natural oil
 Free of silicones
 Colour: Yellowish-transparent

Area of application

- For refurbishing faded plastic and metallic surfaces (e.g. aluminum, chrome, stainless steel, non ferrous metals)
- For removing polishing splashes from plastics

Benefits

Infiltrates deep into surfaces

Application advice

Only for exterior use. The product shall be tested first before application on white surfaces.

ArtNo.	Specification	SP	MOQ
151.070	250 ml	1	12
151.071	1.0 I	1	6



PAINT FINISH

Paint Finish

Polish - Coarse Step 1 Polish



Polish – Fine Step 2

Anti-hologram polish



Description

High performance cutting compound

Water-based
Free of silicone

Area of application

- Fast removal of imperfections in fresh top coats
- For industrial and detailling sector
 Focusses on a one step process

Benefits

- High grinding performance
 Very good deep shine
 Polishing on a low temperature level
 Wall dispenser available

Application advice

We recommend using the Carsystem Lambwool Pad white S Edge or Polish Foam Yellow

ArtNo.	Specification	SP	MOQ
156.451	5.0 kg	1	4

Dispenser for 5 kg Polish

Dispenser

Description

Milking dispenser for 5 kg polishes



ArtNo.	Specification	SP	MOQ
156.460	Dispenser for 5 kg polish	1	1

Description

- Anti-hologram polish Water-based
- Free of silicone

Area of application

- Removal of finest scratches, squirl marks and holograms in
- dark paint Perfect as the last finishing step after Polish Step 1

Benefits

- Very effective removal of holograms without streaks
- Perfect deep shine
 Low dusting
- Good material displacement
- Wall dispenser available


Application advice

We recommend using the Carsystem Finish Waffle Foam Black.

ArtNo.	Specification	SP	MOQ
156.452	5.0 kg	1	4

Dispenser bottle incl. Cap

Dispenser bottle



ArtNo.	Specification	SP	MOQ
156.575	Dispenser bottle incl. cap	1	1

SYSTEM

~

THE R

Wall Bracket for 5 kg Polish

Wall Bracket

Description

Wall bracket for 5 kg polishes



ArtNo.	Specification	SP	MOQ
156.461	Wall Bracket for 5 kg Polish	1	1

Rupes 9. Holder BigFoot

Wall racket

Description

- Wall racket for BigFoot polishing machines
 Dimensions: 32 cm × 20,5 cm

Area of application

Functional wall racket of BigFoot polishing machines

- Special hooks for holding up to 9 m of power cable
- Rounded corners and edges to protect user and machine



ArtNo.	Specification	SP	MOQ
158.134	Black / 32 × 20.5 cm	1	1

RUPES Angle Polishing Machine LH16ES

Angle polishing machine, electric



Description

- Electric angle polishing machine
- Electric angle polishing machine
 Rotating
 Max. Velcro[®] back pad: 200 mm
 Adjustable speed up to 1,700 rpm.
 Thread: M14-M





Angle polishing machine, pneumatic



RUPES Polishing Machine LHR75

Polishing machine, pneumatic

RUPES Polishing Machine LH19E

Polishing machine, Bigfoot



Description

- Electric polishing machine
- Electric poilsning machine
 Rotating
 Ø Velcro® back pad: 125 165 mm
 Adjustable speed up to 1,700 rpm.
 Thread: M14

ArtNo.	Specification	SP	MOQ
157.322	LH19E	1	1
157.640	Polishing back pad M14	1	1

RUPES Polishing Machine LHR15

Polishing machine, electric, Bigfoot



Description

- Electric random orbital polishing machine
- 15 mm orbit diameter
 Velcro[®] back pad: 125 mm
- Adjustable speed up to 5,200 rpm.
 Thread: M8-F

ArtNo.	Specification	SP	MOQ
157.323	LHR15 III	1	1
157.641	Polishing back pad 125 mm	1	1



RUPES Polishing Machine LHR75E Polishing machine Bigfoot, electric



35

Description

- Pneumatic polishing machine
 Velcro® back pad: 75 mm
 Adjustable speed up to 5,000 rpm.
 Thread: 3/8"

ArtNo.	Specification	SP	MOQ
157.331	LH76P	1	1

Description

- Pneumatic mini random orbital polishing machine
- 15 mm orbit diameter
 Ø Velcro[®] back pad: 75 mm
- Adjustable speed up to 11,000 rpm.

ArtNo.	Specification	SP	MOQ
157.332	LHR75	1	1
157.642	Polishing back pad M6 / 75 mm	1	1

- Electric mini random orbital polishing machine
- Orbital12 mm orbital diameter
- Backing pad: 75 mm
 Connection: M6
- Speed adjustable up to 5,500 U/min.
- Thread: M6

ArtNo.	Specification	SP	MOQ
157.340	LHR75E / 75 mm	1	1

RUPES Mini Polishing Machine HLR75STB

Polishing Machine, battery powered



Description

- Battery powered mini polishing machine
 Battery with LED display: 18 V 2.5 Ah
- Battery life: 35 45 min.
 Battery charging time: 35 min.
- Orbital12 mm orbital diameter
- Back pad: 75 mm
 Adjustable speed up to 5,500 rpm

- Scope of delivery:
 HLR75STB polishing machine
 2 × rechargeable batteries 18 V 2.5 Ah
- 1 × battery charger



Finish Back Pad M-14

Finish back pad

Description

- Finish Back Pad for polishing
- pads with Velcro® = Extra thick foam pad
- Degree of hardness: Soft
 Thread: M-14

Benefits

- Adapts perfectly to uneven surfaces
- Distributes the pressure on the surface more evenly



ArtNo.	Specification	SP	MOQ
157.721	123 mm	1	1

RUPES 47.105 Replacement carbon brush

Replacement carbon brush

Description

- Original RUPES replacement carbon brushes for the following
- RUPES polishing machines: RUPES LHR21ES
- RUPES LH16ES
- RUPES LH19E/STD
 RUPES LHR15III/STD
- RUPES LHR75E/STD10 pcs pack

.025-			
-	L,	-	
	and the second		-

ArtNo.	Specification	SP	MOQ
158.290	10 pcs. pack	1	1

Finish Back Pad

Finish back pad

Description Finish back pad for polishing pads Thread: M14



NEW



Polishing Back Pad

Finish back pad

Description

Replacement back pad for Polishing Machine RC166
 Thread: M6 (fixed screw)



ArtNo.	Specification	SP	MOQ
144.916	M6 / 77 mm	1	1

Polishing Machine RC 166

Polishing machine, pneumatic

Description

- Pneumatic polishing machine
- Incl. back padAdjustable speed up to
- 2,500 rpm. Thread: 1/4 inch



ArtNo.	Specification	SP	MOQ
143.723	Mini Polishing Machine RC 166 incl. polishing back pad	1	1

Polish Foam White SC

Polishing pad

Description

- Polish foam pad
- Hardness: Hard

Area of application

For processing of grinding polishes

Application advice

We recommend using the Polish Foam White SC in combination with all common abrasive polishes.

ArtNo.	Specification	SP	MOQ
157.054	90 mm	2	200
157.055	145 mm	2	100

Polish Foam Green

Polishing pad

Description Polish foam pad Hardness: Hard



Area of application

For processing of grinding polishes

Application advice

We recommend using the Polish Foam Green with the Polish C-05 Cut.

Paint Finish

ArtNo.	Specification	SP	MOQ
157.050	90 mm	2	200
157.051	145 mm	2	100

Polish Waffle Foam Yellow

Polishing pad

Description

Polish waffle foam

Hardness: Medium

SYSTEM

Area of application For processing of grinding polishes

Application advice

We recommend using the Polish Foam Yellow with the Polish C-07 Cut.

ArtNo.	Specification	SP	MOQ
157.058	85 mm	2	200
157.059	145 mm	2	100

Polish Foam Yellow

Polishing pad

Description Polish foam pad Hardness: Medium

Area of application For processing of grinding polishes

Application advice

We recommend using the Polish Foam Yellow with the Polish C-07 Cut.

ArtNo.	Specification	SP	MOQ
157.056	90 mm	2	200
157.057	145 mm	2	100

Finish Quadra Pad C10

Polishing pad

Description Finish foam pad

- Hardness: Hard

For processing of grinding polishes

Benefits

- Double layer construction supports the foam and provides a consistent
- Spider cut for more aggressivity

We recommend using the Carsystem Polish C-10 strong.

ArtNo.	Specification	SP	MOQ
151.906	85 mm	4	4
151.640	145 mm	1	1
151.905	160 mm	1	1

Finish Sandwich Pad C30

Polishing pad

- Description Finish foam pad
- Hardness: Medium
 Double layer construction

Area of application

For processing of fine and anti-hologram polishes.

Benefits

Double layer construction supports the foam and provides a consistent performance

Application advice

We recommend using the Carsystem Polish C-30 finish

ArtNo.	Specification	SP	MOQ
151.908	85 mm	4	4
151.639	145 mm	1	1

Finish Foam White AH

Polishing pad

Description Finish foam pad Hardness: Soft



Area of application For processing of fine and anti-hologram-polishes and waxes

Application advice

We recommend using the Polish Foam White AH with the Polish C-30 Finish.

ArtNo.	Specification	SP	MOQ
157.052	90 mm	2	200
157.053	145 mm	2	100

Finish Foam Black AH

Polishing pad

Description Finish foam pad Hardness: Soft



Area of application

For processing of fine & antihologram-polishes and waxes

Application advice

We recommend using the Finish Foam Black AH in combination with all common fine and anti-hologram-polishes and waxes.

ArtNo.	Specification	SP	MOQ
157.064	90 mm	2	200
157.065	145 mm	2	100



Area of application

Hardness: Medium

For processing of grinding polishes

ArtNo.	Specification	SP	MOQ
153.088	85 × 25 mm	2	100
153.076	145 × 25 mm	1	100

Car Mop White

Polishing pad

Description

Polish foam pad Hardness: Hard

Area of application For processing of grinding

polishes

Application advice

We recommend using the Car Mop white with Refinish 1

ArtNo.	Specification	SP	MOQ
133.149	150 × 50 mm	1	10



Spider cut Double layer construction



performance

Application advice

Finish Waffle Foam Black AH

polishing pad

Description

Finish Waffle Foam



Area of application

For processing of fine & anti-hologram-polishes and waxes

Application advice

We recommend using the Finish Foam Black AH in combination with all common fine & anti-hologram-polishes and waxes.

ArtNo.	Specification	SP	MOQ
157.066	85 mm	2	200
157.067	145 mm	2	100

Finish Waffle Pad Orange

Polishing pad

Description

Polish waffle foam pad Hardness: Medium

Area of application

For processing of grinding

polishes

Benefits

Waffle form reduces the temperature level

ArtNo.	Specification	SP	MOQ
153.114	135 × 25 mm	2	100

Car Mop Yellow

Polishing pad

Description

Finish foam pad Hardness: Medium

Area of application

For processing of fine and anti-hologram polishes

- Provides very high gloss-especially on dark colours
 Highly flexible

ArtNo.	Specification	SP	MOQ
137.798	75 × 20 mm	6	60



Lamm Wool Pad White S Edge

Lamb wool pad



Description

100 % premium lamb wool
Protective armour due to turned-in edge
The turned-in edge forms an edging on the backside which fixes the backpad perfectly

Area of application

Designed for polishing strong curves, narrow edges and hard-to-reach areas e. g. entrance areas, window frames, roof pillars

Benefits

- Protects surrounding parts from damage
 Easy polishing also in hard to reach areas
- Very fast removal of scratches
 Highest quality offers extremely long durability

ArtNo.	Specification	SP	MOQ
157.163	80 × 17 mm	1	10
157.232	130 × 25 mm	1	10

RUPES Polish Pad

Polishing pad

NEW



Wax Puck

Application foam

Description

Polyurethane foam

Area of application = Effective application of polishes



and waxes

Benefits

Ergonomic handle

ArtNo.	Specification	SP	MOQ
152.565	128 - 130 mm	1	1

Lamb Wool Pad Gold S

Lamb wool pad



Description

- = 100% lamb wool = Soft backpad

Area of application

For processing of grinding polishes

Benefits

- Highest quality offers extreme long durability
- Polishing on a low temperature level
 Very high cutting power for an efficient removal of sanding marks

ArtNo.	Specification	SP	MOQ
157.166	80 × 17 mm	1	500
157.290	150 × 17 mm	1	10

Car Pad Black





Description

- Polish foam pad
- = Hardness: Ultra fine, fine

Area of application

- The 9.DA pad FINE is suitable for processing abrasive
- The 9.DA pad ULTRA FINE is suitable for processing ablasive not polishes
 The 9.DA pad ULTRA FINE is suitable for processing anti-hologram polishes

Benefits

Also suitable for random orbital machines

ArtNo.	Specification	SP	MOQ
158.854	Ultra fine / white / 130 / 150 mm	1	1
158.853	Fine / yellow / 130 / 150 mm	1	1
158.856	Ultra fine / white / 150 / 180 mm	1	1
158.855	Fine / yellow / 150 / 180 mm	1	1

Car Polish Roll

Disposable polishing cloth

Description

- Disposable polishing cloth
 Dispenser with 370 tear-offs
- Perforated
- Size: 36x40 cm

Area of application

Cleaning and degreasing of surfaces

Benefits

- Extremely soft
- Free of lints Tear resistant
- Highly absorbent



ArtNo.	Specification	SP	MOQ
134.582	370 tear-off / 36 × 40 cm	1	1

Description

- = Finish back pad for 75 mm polishing pads
- = Velcro® = Bolt: 6 mm

ArtNo.	Specification	SP	MOQ
133.147	75 mm	1	10

142 Paint Finish



Micro Fiber Cloth Sky Blue

Description

Micro fiber cloth 40 × 40 cm

- 260 g/m²
- 80% polyester / 20% polyamide
 Ultrasonic cut

Area of application

For all common cleaning works.

Benefits

The edges do not scratch

Application advice

Washable up to 30 °C without detergents

ArtNo.	Specification	SP	MOQ
156.587	260 g/m² / light blue	5	360

Micro Fiber Cloth

Wave Cut

Description

Micro fiber cloth 40 × 40 cm = 300 g/m²

= 80% polyester / 20% polyamide With ultrasonic cut

Area of application

Perfect for sharp edged panels For all common cleaning works

Benefits

 Universal micro fiber cloth The edges do not scratch

Application advice

Washable up to 30 °C without detergents.

ArtNo.	Specification	SP	MOQ
156.588	300 g/m ² / white	5	300





Micro Fiber Cloth

2 IN 1

Description

- Micro fiber cloth 40 × 40 cm
- 380 g/m²
 80% polyester / 20% polyamide
- Ultrasonic cut

Area of application

For all common cleaning works

Benefits

- Two different sides (short fibres / long fibres) Flexible use
- The edges do not scratch

Application advice

Washable up to 30 °C without detergents.

ArtNo.	Specification	SP	MOQ
156.589	380 g/m ² / dark blue	3	240



Micro Fiber Cloth Fluffy

- Description
- = Micro fiber cloth 40 × 40 cm
- solo g/m²
 solo g/m²
 solo g/m²
 with ultrasonic cut

Area of application

- High absorption of polishes, waxes and dust = "Final cloth", extremely gentle on the surface
- Benefits
- Very long and soft fibres
- Perfect absorptionThe edges do not scratch

Application advice

Washable up to 30 °C without detergents.

ArtNo.	Specification	SP	MOQ
156.590	500 g/m² / grey	2	180





- Paint Finish

± 43



Micro Fiber Cloth

Polish Extreme

Description

- = Micro fiber cloth 40 × 40 cm
- 800 g/m²
 80% polyester / 20% polyamide
- Corded edges

Area of application

- Polishing cloth
- = High absorption of polishes and waxes

Benefits

- Extremely high absorption
- Very gentle on the surface
 The edges do not scratch

Application advice

Washable up to 30 °C without detergents.

ArtNo.	Specification	SP	MOQ
156.591	800 g/m ² / black / yellow	1	100

STONE CHIP PROTECTION BONDING B SEALING STEEL BOND UNIFLEX TAPES SOUND DEADENING PANELS POWER MIX APPLICATOR

POMERNI

A RKTILLE

Bonding & Sealing

UNIFLEX PU

Bonding and sealing compound

Description Bonding and sealing compound Polvurethane

Area of application

Elastic bonding of GRP and metal Sealing of seams, joints and fittings

Grey / 310 ml

Black / 310 ml

Benefits Fast drying Overpaintable

Art.-No.

148.923

148.925

148.924



100

UNIFLEX MS	FLEX MS
------------	---------

Sprayable seam sealer

Description

Spray- and brushable seam sealer Poly-Oxy-Propylene (POP) copolymer

Area of application

Seam sealing for overlapping panels and welded seams in original structure e.g. vehicle and carbody repair, container construction, metal construction, ventilation engineering and air-condition technology

Keep UNIFLEX-MS away from fresh, not finally

Benefits

Fast dryingStone chip protection

Application advice

hardened PU material.



CAR

~

SP MOQ Specification White / 310 ml 1 12

12

12

IFLE

SP

1

MOQ

12

1

1

ArtNo.	Specification	SP	MOQ
135.119	Beige / 310 ml	1	12
148.926	Grey / 290 ml	1	12
135.706	Black / 310 ml	1	12

UNIFLEX Glas Fast-Cleaner

Glass cleaner + activator

Description

 Glass cleaner and activator Drying time

= 1 – 2 min.

Area of application

Application for a perfectly clean surface
 Surface cleaner for Uniflex Glas and Glas HM

Application advice Application with a lint-free cloth. Close bottle immediately after use (sensitive to moisture).



ArtNo.	Specification	SP	MOQ
144.035	Clear / 30 ml	1	25

UNIFLEX Glas

Glass bonding glue

Description

- Glass bonding glue
- IK Polyurethane FMVSS 212 tested

Area of application

For glueing front, side and rear windows

Application advice

Art.-No.

148.927

Holding time: 2 hours (23 °C and 50% rel. humidity) for cars with driver and co-driver airbags. Processing temperature: 5 °C to 40 °C.

dulus - non-conductive

- Glass bonding glue

For glueing front, side and rear windows

Benefits

- Fast drying
- Applicable for vehicles with integrated antenna

Application advice

Holding time: 30 min. (23 °C and 50% rel. humidity) for cars with driver and co-driver airbags Processing temperature: 5 °C to 40 °C

ArtNo.	Specification	SP	MOQ
148.928	Black / 310 ml	1	12



Applicator

Description Special applicator tool for liquid primers

Area of application

For the application of Carsystem UNIFLEX Glas Fast-Primer





ArtNo.	Specification	SP	MOQ
139.325	Applicator	1	100

UNIFLEX Glas HM
Glass bonding glue – High mod
Description
= Class handing glus



- 1K Polyurethane
 High modulus and non-conductive
 FMVSS 208/212 tested

Area of application

High modulus glue (high stiffness)

Specification

Black / 310 ml

UNIFLEX Glas Fast-Primer

Moisture curing glass-primer

Description

Moisture curing glass primer

Drying time

= 15 min.

Area of application

- Primer for Uniflex Glas and Glas HM
- Provides adhesion between glass and glass bonding glue Application on the ceramic zone of the
- window

Application advice

To use only in combination with Carsystem Uniflex Glas Fast-Cleaner Surface must be clean, dry, dust and grease-free. Glas Fast-Primer application only after

surface treatment with the Carsystem Uniflex Glas Fast-Cleaner. Shake bottle well before use.



ArtNo.	Specification	SP	MOQ
144.036	Black / 30 ml	1	25

UNIFLEX Nozzle

Spare nozzles

Description

Spare nozzles for Carsystem Uniflex cartridges

Area of application

Spare nozzles for Carsystem UNIFLEX cartridges = Fits only for cartridges

ArtNo.	Specification	SP	MOQ
150.292	Nozzles for UNIFLEX PU	12	12
155.241	Nozzles for UNIFLEX MS	12	12

Bonding & Sealing

UNIFLEX Adapter Nozzle

Wing tip

Description Nozzle for seam sealing Wing tip

Area of application Seam sealing on folded edgesFits only for cartridges



UNIFLEX	Adapter	Nozzle
	Adaptor	

V-Nozzle Description Nozzle for seam sealing

Area of application For an even sealing of folded edgesFits only for cartridges





ArtNo.	Specification	SP	MOQ
149.009	Blade wing tip / Bag of 10	1	1

ArtNo.	Specification	SP	MOQ
149.010	V-nozzle / bag of 10	1	1

UNIFLEX Air Gun

Air gun



Description

Cartridge air gun for the extrusion of 1K sealing compounds

Area of application

For extruding of seam sealer
 For 290 ml / 310 ml cartridges and aluminum bags up to 400 ml

For processing with Uniflex cartridges (PU, MS, Glas,

Glas HM)

ArtNo.	Specification	SP	MOQ
153.224	Uniflex Air Gun	1	1

MS Air Gun

MS spray gun



Bonding & Sealing

49

Description

Manual gun for the extrusion of 1K sealing compounds

Area of application

- For processing of Carsystem Uniflex cartridges (PU, MS, Glas, Glas HM)
- Gras, uras ning
 Classic: for 290 ml / 310 ml cartridges
 Top: for 290 ml / 310 ml cartridges and aluminum bags up
 to 400 ml

ArtNo.	Specification	SP	MOQ
135.108	Classic for 310 ml	1	1
139.286	Top for 290 – 400 ml	1	1

Description

Pneumatic cartridge gun for the extrusion and spraying of 1K sealing compounds

Area of application

- Spraying and extruding of 1K sealing materials
 For 290 ml / 310 ml cartridges and aluminum bags up to 400 ml
 For processing of Uniflex cartridges (PU, MS, Glas, Glas HM)

ArtNo.	Specification	SP	MOQ
125.681	MS Air Gun	1	1
131.563	Spare nozzle set	1	1

Mount Tape

Double sided adhesive tape

Description

- Double sided tape
- Temperature resistance: -40 °C to +120 °C
- Black adhesive tape
- Based on polvethylene Modified acrylate glue

Area of application

- Usable for permanent application with high shear and UV exposure, softeners and a wide temperature range
- (e.g. edge lining and emblems, side bumpers, mirror
- glass or counterbalance lead weights) Industrial mounting of signs or labels interior and
- exterior

Benefits

- High adhesive strength
- Very high UV resistance Good solvent resistance
- Flexible fixing also on bended surfaces

ArtNo.	Specification	SP	MOQ
125.712	9 mm × 10 m	2	20
125.713	12 mm × 10 m	2	20
125.720	19 mm × 10 m	1	10
125.725	25 mm × 10 m	1	10
125.726	50 mm × 5 m	1	60

HS-Acryl Tape

Double sided adhesive tape

Description

- Double sided tape Temperature resistance:
- -40 °C to +150 °C
- Grey adhesive tape
- Based on acrvl Acrylate glue

Area of application

- High performance tape for permanent application in extreme temperatures and humidity (e.g. edge linings and emblems, side bumpers, mirror glasses or
- counterbalance lead weights)
- Industrial mounting of signs or labels interior and exterior
- Suitable for metal, wood, glass and most common plastics

Benefits

Extremely high initial adhesion and strength High temperature and humidity resistance

ArtNo.	Specification	SP	MOQ
147.024	6 mm × 10 m	2	20
137.072	9 mm × 10 m	2	20
137.073	12 mm × 10 m	2	20
137.074	19 mm × 10 m	1	10
137.075	25 mm × 10 m	1	10

KS-50

Sealing compound - brushable

Description

Brushable sealing compound

- Permanently elastic Based on synthetic rubber
- Temperature resistance: -25 °C
- to 80 °C Colour: Grey

Area of application

Front and back apron, joints and trim pieces, inside the trunk and foot compartment, wheel cases etc.

Application advice

Overpaintable after application of an adhesion primer

Art.-No.

150.801

Nylon brush

T

1

14

CAR

~

KS-50

SP

1

MOQ

12

SYSTEM

Description Special brush with nylon bristles



Area of application



For processing sealing compounds



ArtNo.	Specification	SP	MOQ
141.453	30 mm	1	70

KS-200

Cavity protection

Description

- Sprayable cavity protection
- Wax-like cavity protection
 Colour: Brown transparent
- Melting point: 95 °C
 Colour: Brown transparent

Area of application

For preserving all cavities of car bodies

Benefits

High creeping capacity also on hard-to-reach areas Rust protection
 Adhesion on metal

Application advice

Not overpaintable

ArtNo.	Specification	SP	MOQ
126.062	11	1	12

KS-500

Underbody protection bitumen

Description

- Sprayable underbody protection
- Based on bitumen
- Colour: Black
- Area of application Permanent underbody protection for car bodies

Benefits

Vibration absorbing Anti-noise compound

Application advice

Not overpaintable



ArtNo.	Specification	SP	MOQ
126.034	11	1	12
132.483	601	60	60

Specification

1 kg

Bonding & Sealing

KS-300

Cavity wax

Description

<u>.94</u>

KS-200

- Sprayable cavity protection
- Wax-like cavity protectionColour: White transparent
- Melting point: 160 °C
 Colour: White transparent

Area of application

For preserving all cavities of car bodies

Benefits

- Very high melting point
- Drip-freeRust protection
- Adhesion on metal

Application advice

Not overpaintable



ArtNo.	Specification	SP	MOQ
155.650	White transparent / 11	1	12

KS-100

Underbody protection bitumen

Description

- Brushable underbody protection
- Based on bitumen
- Thixotropic bitumen-resin composite
- Colour: Black

Area of application

Underbody protection for car bodies

Application advice

Not overpaintable



BONDING & SEALING

ArtNo.	Specification	SP	MOQ
126.032	11	1	12

152

Underbody protection wax

Description

Sprayable underbody protection wax
 Permanent rust protection based on wax
 Colour: Black

Area of application

Permanent underbody protection for car bodies

Benefits = High water displacement

Application advice Not overpaintable

KS-2100

ArtNo.	Specification	SP	MOQ
126.095	11	1	12

Bonding & Sealing

KS-1000

Stone chip protection

Description

Sprayable stone chip and underbody protection
 Based on plastic rubber
 Free of asbestos

Area of application

Underbody treatment for car bodies
 Stone chip protection for spoilers, sills and lower door areas

Benefits

- Vibration absorbing
- Anti-noise compound
 Also suitable for PVC substrates

Application advice

Overpaintable after application of an adhesion primer



ArtNo.	Specification	SP	MOQ
149.266	White / 11	1	12
149.264	Grey / 11	1	12
149.265	Black / 11	1	12

KS-2100

Stone chip protection + seam sealer

Description

Sprayable stone chip protection and seam sealer
 Rubber/resin basis

Area of application

Stone chip protectionSeam sealer for car bodies

Benefits

- Vibration absorbing
- Anti-noise compoundRust protection
- = High shifts without paint run possible

Application advice

Overpaintable after application of an adhesion primer

ArtNo.	Specification	SP	MOQ
139.214	Grey / 1 I	1	12
140.146	Black / 11	1	12

KS-3000 Plus

HS stone chip protection

- Description
- Sprayable stone chip and underbody protection
 Rubber/resin basis

Area of application

Stone chip and underbody protection for car bodies

Benefits

- Vibration absorbing
- Anti-noise compound
 Rust protection
- Very weather resistant
- Very high abrasion resistance

Application advice

Overpaintable with water base paint without a primer. Overpaintable with 2K or acrylic paints after application of an adhesion primer. Suitable for oven drying. Very good sandable after final hardness. Variable structure fine or rough possible.

ArtNo.	Specification	SP	MOQ
152.621	White / 11	1	12
152.804	Grey / 11	1	12
152.622	Black / 11	1	12



KS-4000

Stone chip protection water-based

Description

Sprayable stone chip protection

- Water-basedFree of solvents
- Colour: Black

Area of application

Sprayable stone chip protection and seam sealer for car bodies

Benefits

- Vibration absorbing
- Anti-noise compound
 Solvent resistant
- Very high abrasion resistance

Application advice

Overpaintable after application of an adhesion primer Suitable for oven drying Very good sandable after final hardness Variable structure fine or rough possible

ArtNo.	Specification	SP MOQ	
134.374	11	1	12

KS-Gun

Underbody protection gun

Description

- Pneumatic pressure cup gun
 Structure gup
- Structure gunCup content: 11

Area of application

- Rust protection, underbody protection and cavity protection
 Processing of solvent- and
- water-based products

Benefits

- Amount of air and material
- output adjustable Various structures possible

ArtNo.	Specification	SP	MOQ
157.032	Gun for underbody protection	1	1
142.279	Tube set / 0.95 m	1	1
147.956	KS-Gun replacement tank gasket	1	1
158.017	KS-Gun nozzle	1	1



153

KS-Dual Gun

Underbody protection gun

Description

- 44

S-4000

- Pneumatic underbody and
- cavity protection gun Including two suction pipes
- Quick coupling

Area of application

 Rust protection, underbody protection and cavity protection

Benefits

- Fast change of material possible
- Low maintenance effort



ArtNo.	Specification	SP	MOQ
126.040	Incl. 2 additional suction pipes / without cavity protection tube	1	1
126.058	0.9m / cavity protection tube	1	1
126.048	Replacement suction pipes	1	1

KS-250

Cavity protection ML

Description

- Cavity protection spray
- Wax like cavity protection
- Melting point: 160 °C
 Colour: Brown transparent
- -----

Area of application

For renewing or repairing of existing coatings

Benefits

- Very high melting point
- Drip-freeRust protection
- Adhesion on metal

Application advice

Not overpaintable

			d.,	
	5	1	50	4
				1
3			ł	ų
	1	-	-	ł
				1
				1
			-	5

ArtNo.	Specification	SP	MOQ
126.061	500 ml / incl. hose	1	12

Bonding & Sealing

Rust protection wax

Description

- Rust protection wax Liquid rust protection
 Temperature resistance: -25 °C to +160 °C
- Colour: Transparent

Area of application

- Transparent conserving of rust exposed parts on car
- bodies Suitable to protect subareas of the engine
- Benefits
- Good water displacement

Protects also hinges

Very temperature resistant

Application advice

Not overpaintable

ArtNo.	Specification	SP	MOQ
125.468	500 ml	1	12



- 64

KIS - 400

Underbody protection bitumen

Description Underbody protection spray Based on bitumen Colour: Black

Area of application For renewing or repairing of existing underbody coatings

Benefits No gun application necessary

Application advice Not overpaintable

I



ArtNo.	Specification	SP	MOQ
126.029	500 ml	1	12

Power Mix 2K PU glue



Power Mixer

Mixing tube – 25 ml

Plastic mixing tubeColour: Green

Area of application

Description

KS-850

Underbody protection wax

Description

- Underbody protection wax spray
- Permanent rust protection based on wax Temperature resistance: -25 °C to +80 °C
- Colour: Brown

Area of application

For renewing or repairing of existing underbody coatings

Benefits

Good water displacement

Application advice

Not overpaintable

HOLEN .
KS-850
A DESCRIPTION OF

KS-1050
Stone chip protection

Description

Underbody protection spray Based on synthetic rubber
 Free of asbestos

Area of application

For renewing or repairing of existing stone chip protections

Benefits

No gun application necessary Also suitable for PVC substrates

Application advice

Overpaintable after application of an adhesion primer





ArtNo.	Specification	SP	MOQ
151.952	Mixing tube / green	12	12

Mixing tube for Carsystem Power Mix 25 ml cartridges



Art.-No. Specification SP MOQ 126.094 500 ml 1 12

ArtNo.	Specification	SP	MOQ
126.022	Grey / 500 ml	1	12
126.023	Black / 500 ml	1	12

hh

Description

2K Polyurethane glue

Area of application

- Repair of plastic parts
 Suitable for metal, wood, stone, concrete or glass
- For wide area glueing and filling of cavities

Application advice

25 ml cartridges manual dosage, 50 ml cartridges for Power

Mix gun. We recommend the use of the adhesion promoter

144.502 / Carsystem Power Mix Primer / Activator 150 ml.

ArtNo.	Specification	SP	MOQ
144.498	Clear / 25 ml	1	12
144.500	Clear / 50 ml	2	24
144.499	Black / 25 ml	1	12
144.501	Black / 50 ml	2	24

Power Mixer

Mixing tube – 50 ml

Description

- Plastic mixing tubeColour: Blue

Area of application

Mixing tube for Carsystem Power Mix 50 ml cartridges



ArtNo.	Specification	SP	MOQ
140.926	Mixing tube / blue	12	12

Power Mix Gun

2K PU-glue gun

Description Application gun for plastic repairs

Area of application

Application gun for Carsystem Power Mix 50 ml cartridges



Power Mix Film

Backing and supporting film

Description

- Backing and supporting film Front side: With a supporting mesh
- Back side: Plain film, to be removed after curing = Size: 12,5 × 150 cm

Area of application

- Plastic repair
- Supporting the plastic compound
 Usable with Carsystem 2K Power Mix PU compounds





ArtNo.	Specification	SP	MOQ
140.927	Cartridge gun	1	1

ArtNo.	Specification	SP	MOQ
144.503	Backing / supporting	1	12

Power Mix Primer

Primer + activator

Description

Adhesion primer for plastic parts
 Colour: Transparent

Area of application Adhesion primer for glueing different plastic parts



Sound deadening panels

Description Sound absorbing
Self-adhesive

Area of application For insulating sounds and

vibrations

SYSTE



ArtNo.	Specification	SP	MOQ
144.502	150 ml	1	12

ArtNo.	Specification	SP	MOQ
126.055	Bitumen black / 1 carton à 5 pcs. / 25 × 50 cm	5	25
134.139	Patterned-black / 1 carton à 10 pcs. / 50 × 50 cm	10	50
134.140	Smooth-black / 1 carton à 10 pcs. / 50 × 50 cm	10	50

Description

- 2K Repair and glue compound
 Based on solvent free epoxy resin
 High temperature resistance
 Colour: Grey metallic

Area of application

- For connecting the same or different types of material e.g. steel, aluminium, lead, wood, iron etc.
 For filling holes, funnels, cracks etc.
 Sealing and insulation material for permanent repairs

- especially in environments, where welding is not an option = High chemical resistance against oil, gasoline and most of organic liquids

Benefits

- Filling, sealing and glueing
 Very good mouldable
 Extremely durable after curing
 Low shrinkage

ArtNo.	Specification	SP	MOQ
150.501	125 g	1	12

COCKPIT-SPRAY GUN CLEAN SET CLEANING WIPES STAUB STOP PUMP SPRAY CLEANING FINISH CLAY CHAMOIS SQUEEZER SILICONE REMOVER H20 CLEANER SCRAPER CAR CLEAN MULTI



Spraygun	cleaner
----------	---------

Spraygun cleaner

Description

Solvent-based paint spray gun cleaner

- Area of application
- Cleaning of paint spray guns Removal of contamination from water- and solvent-
- based paints

Benefits

- Easy and thorough cleaning

Art.-No.

158.627

Enormous time saving
Cost-effective alternative to the spray gun cleaning mashine

Specification

400 ml



SP

1

CA8

MILD

SYST

SLICONE REMOVER

1.0

NEW

Description
 Silicone remover spray
Area of application
 Cleaner for all works prior to painting Removes dirt, fat, oil, silicone, wax, tar, gresidues etc.

Silicone remover



MOQ	ArtNo.	Specification	SP	MOQ
12	149.423	400 ml	1	6

ISO-VE 7030

Isopropanol cleaner

Description

Special cleaner Isopropanol-based

Area of application

- Perfectly suitable for gentle cleaning of plastic, GRP or CRP surfaces
- surraces
 Residue-free removal of release agents, dirt, grease, oil, silicone, as well as residual minerals and salts from the surface
- Antistatic

Benefits

- Antistatic Very volatile
- Extremely fast cleaning

Application advice

Could etch 1K materials

ArtNo.	Specification	SP	MOQ
154.034	51	1	1
157.345	201	1	1

Silicone Remover Mild

Silicone remover - solvent based

Description

Silicone removerSolvent based

Area of application

- Silicone and grease remover Cleaning of dirt residues prior to
- painting
 For all daily cleaning works

Silicone Remover Water

Silicone remover - water based

Description Silicone remover Water-based

Area of application

- Removes salt and minerals from the surface
- Rinsing of water-base spray guns



and the second s

ArtNo.	Specification	SP	MOQ
146.711	11	1	12
146.704	51	1	4
147.023	30 I	1	1
139.212	Drump tap for 30 I	1	1

ArtNo.	Specification	SP	MOQ
146.705	51	1	1

Tack cloth

- Description Tack cloth Cotton-rayon mix in wave form
- Wave formed surface
 Free of silicones

Area of application

Removal of dust prior to painting

Benefits

- Wave form enlarges the
- absorption quantity Is able to hold incredible

amounts of dust

Wave form adapts to hand and surface

ArtNo.	Specification	SP	MOQ
148.124	1 unit	1	50





Silicone Remover Spray

Cleaning

H₂O Cleaner

Cleaner

Description

- Intensive cleaner
- Water-based

Area of application

- Efficient and environmently friendly cleaning of tools and parts in the body shop = Perfect for paint stripping from
- panel stands

Benefits

- Removes water-based and solvent-based paints, 2K primers and epoxy resin-based products
- Multiple times usage (pigments sediment on the bottom and can be strained off)
- Water-dilutable



ArtNo.	Specification	SP	MOQ
151.953	51	1	1

Staub Stop

Tack cloth

Description

- Tack cloth
- Rayon fabric
- Slightly sticky surface
 Free of silicones

Area of application

Dust removal prior to painting

Benefits

- Very good dust removal
- Does not dry out



ArtNo.	Specification	SP	MOQ
132.615	1 unit	1	500
132.616	5 units (pack)	1	100

Staub Stop Water

Tack cloth



Description

- Tack cloth
- Micro fiber fabric Water-soluble impregnation
- Free of silicones

Area of application

Absorption of dust Especially for cleaning the base coat prior to the clear coat application

Benefits

No tacky residues Never leaves streaks of resin

ArtNo.	Specification	SP	MOQ
144.538	10 pcs.	10	240

Car Clean Multi Extreme Box

Cellulose cloth

Description

- Special cellulose cleaning cloth
 250 tear-offs in a dispenser box
- = 100 % rayon fabric

Area of application

Universal cleaning cloth for all cleaning works

Benefits

- High absorbing cloth
 Good solvent resistance
- Tear resistantLint free due to cutted edges
- Washable and reusable



ArtNo.	Specification	SP	MOQ
142.765	Box à 250 pcs. / 32 × 38 cm	1	1

Staub Stop Water Black

Tack cloth



Description

- Tack cloth
- Non-woven with hot melt-impregnation Silicone & lint free

Area of application

- Removal of dust
 Especially for cleaning the base coat prior to the clear
- Coat application
 Removal of small and medium dust particles in the
- industry

Benefits

- The black, non-woven tack cloth offers very good visual
- control of contaminated areas on the surface
- Resealable packaging
 Leaves no adhesive residues on the cleaned surface
- Acrylic binder for better durability and abrasion resistance without fiber loss
- Retains twice as much dust than traditional tack cloths

ArtNo.	Specification	SP	MOQ
158.033	10 pcs. / black / 32 × 40 cm	10	180

Car Clean Multi

Paper cleaning cloth



Car Clean Multi Box

Paper cleaning cloth

Description


Special paper cleaning cloth = 250 tear-offs in a dispenser box

Area of application

- Perfect for higher amounts of
- liquid For paint, metal and smooth wooden surfaces Takes off solvents, oil and
- lubricants

Benefits

- High absorbing cloth
- Good solvent resistance





ArtNo.	Specification	SP	MOQ
139.910	32 × 38 cm / Box à 250 pcs.	1	1

Description

Special paper cleaning cloth Perforated roll

Area of application

- Perfect for higher amounts of liquid
- For paint, metal and smooth wooden surfaces
 Takes off solvents, oil and lubricants

Benefits

- High absorbing cloth
 Good solvent resistance
- Tear resistant

ArtNo.	Specification	SP	MOQ
134.577	500 tear-offs / 36 × 32 cm	1	1

Car Clean Double Blue

Paper cleaning cloth

Description

Paper cleaning cloth 2-layers Perforated roll
Layers fully bonded

Area of application For all standard cleaning works



Car	Clean	Triple	Blue
Vai	orean	TIPIC	Diac

Paper cleaning cloth

Description

Paper cleaning cloth 3-layers Perforated roll
 All layers fully bonded

Area of application For all standard cleaning works



Cleaning wipes

Cleaning wipes soft



ArtNo.	Specification	SP	MOQ
134.580	1,000 tear-offs / 36 × 36 cm	2	2

ArtNo.	Specification	SP	MOQ
134.578	500 tear-offs / 36 × 36 cm	2	2
134.579	1,000 tear-offs / 36 × 36 cm	1	1

Car Clean Double White

Paper cleaning cloth

Description



Cleaning wipes

Cleaning wipes

- Description
- Special cleaning wipes
 Dispenser roll perforated tear-
- offs Fine multiholes

Area of application

Universal soft cleaning cloth for all cleaning works

Benefits

- Extremely absorbent Solvent resistant
- Lint-free cleaning
- Ultra soft Cleans also in deepest
- structures Extremely tear resistant, even when wet Washable and reusable

ArtNo.	Specification	SP	MOQ
141.253	1,500 tear-offs / 38 × 24 cm	2	2

ArtNo.	Specification	SP	MOQ
156.458	cleaning wipes roll / 475 tear- offs / 38 × 30 cm	2	2

Squeezer

Squeezer sponge

Description Soft swelling sponge made of absorbent natural fibers



ArtNo.	Specification	SP	MOQ
139.858	Squeezer sponge – neutral	1	520
157.987	Squeezer sponge with Carsystem brand	1	520

Description

- Special cleaning wipes
 Dispenser roll for the Carsystem dispenser bucket
 Fine multi-holes

Area of application

Universal soft cleaning cloth for all cleaning works

Benefits

- Extremely absorbent
- Solvent resistant
 Lint-free cleaning
- Ultra soft
- Cleans also in deepest structures
 Extremely tear resistant, even when wet
- Washable and reusable
 "Ready to use" cleaning wipes out of the Carsystem dispenser bucket

Application advice

We recommend to use only the Carsystem ISO VE 7030 cleaner in the bucket.

ArtNo.	Specification	SP	MOQ
156.457	Wipes roll soft for bucket / 100 tear-off / 30 × 32 cm	1	6
156.459	Bucket for wipes soft	1	1

Scraper

Paint off blade

Description

Paint off security blade

Area of application

Removal of overspray from glass surfaces



ArtNo.	Specification	SP	MOQ
140.984	Scraper	1	200
140.985	Refill (100 Blades)	1	50

Gun Clean Set

Gun cleaning set



Cockpit-Spray Cleaning spray

Description

- Care and cleaning spray
- Free of silicones
 Odour: Citrus
- Colour: Transpartent

Area of application All interiour plastic and rubber surfaces

Benefits

Antistatic

Application advice

Avoid application on steering wheel, gear handle and foot pedals

ArtNo.	Specification	SP	MOQ
126.020	400 ml	1	12

Description

Gun cleaning set

If single items
6 different needles and 11 different brushes

ArtNo.	Specification	SP	MOQ
157.520	Set	1	50



Pump Spray

Pump spray

Coding Caps Colour code rings

Description Plastic colour code rings

Area of application

Colour coding for Carsystem pump bottles

Benefits

Pump bottles can be clearly distinguished

ArtNo.	Specification	SP	MOQ
152.642	Coding caps set of 5 pcs.	1	1

ArtNo.	Specification	SP	MOQ
147.468	200 g	1	10

Finish Clay	
Cleaning clay	
Description	
Description	
Cleaning clay	

Area of application Residue and scratch-free removal of overspray, flash rust, insects and tree gum from

Benefits

painted surfaces

OCKPIT

SPRA

Environmently friendly – no solvents

Remains wet and does not get brittle (store it in the box)





Description

- Pump spray bottle
- 100 % recycled plastic
 Content: Max. 0,9 I

Area of application

- Application and atomisation of liquids out of buckets or barrels
- Suitable for Carsystem Silicone Remover Mild, Silicone Remover Water and ISO-VE 7030

Benefits

Adjustable atomisation

Application advice

Strong solvents can damage the seals.

ArtNo.	Specification	SP	MOQ
157.412	White / 11	1	60
142.808	Translucent / 11	1	60
139.606	Replacement viton sealing set	1	1
146.680	Spare nozzle	1	1
153.269	Replacement viton sealing spray head	1	1

Nano Easy Cleaner

Cleaning sponge

Description

Cleaning sponge with nano coating

Area of application

- Cleaning of glass, paint and plastics = Suitable for windows, head
- lamps, mirrors and painted surfaces
- Do not use in conjunction with cleaning agents, cleaner can attack the nano coating

Benefits

Special nano coating removes insects, overspray and dirt easily.

Application advice

Only in combination with water. Added cleaning agents can damage the nano coating.

ArtNo.	Specification	SP	MOQ
143.383	Cleaning sponge	1	10

PREP HAND NEOPREN HAND HAND CLEANER STAR MASK NITRIL HAND PREMIUM DISPOSABLE PROTECTIVE COVERALL **PERSONAL SAFETY** *RESPIRATOR MASKS* FFP2 FFP3 SAFETY LENS UV-PROTECTIVE GLASSES **COVERALL BLACK SUIT** STAR DUST LATEX HAND PREMIUM



Personal Safety

Star Mask

Respirator





Specification

Protection class P2

Description

- Half mask with filters
- Exchangable filters and pre-filters
- Bayonet fixing on the filters
 Protection class FFA2 P2 R

Area of application

All common paint works

Benefits

- Perfect protection against dust, dirt, organic vapours of
- solvents Pre-filter for a longer lifetime of the filters

Application advice

Attention to different regional legislations

ArtNo.	Specification	SP	MOQ
141.143	М	1	12
141.145	L	1	12

Star Dust P2

Dust mask

Description

- Dust mask / FFP mask
- Protection class FFP2 NR Variable alumini im nose stripe for
- better fitting

Area of application

Protects against harmful oil or waterbased particles

Benefits

Soft and gentle inner section = Suitable in combination with safety glasses

Application advice

We recommend to exchange the mask after every work shift.

ArtNo.	Specification	SP	MOQ
140.951	Protection class P2	20	120

Star Mask Pre P2 R

Pre-filters

Description

Art.-No.

141.154

Pre-filters for Star Mask Refill Protection class P2

Area of application

Protects against particles e.g. dust, smoke and aerosols



SP

10

MOQ

100

Star	Mask	Pofill
Jlar	Mask	neilli

Charcoal filter

Description

- Replacement filters for the Star Mask
- Charcoal filters-protection class A2



Area of application Protects against dust, dirt and organic vapours

ArtNo.	Specification	SP	MOQ
141.224	Protection class A2	2	60


Star Mask Disc

Filter frame


Description

Frame for the Carsystem Star Mask Pre P2 R pre-filters

Area of application The frame fixes the pre-filter on the charcoal filter







Respirator	Mask	FFP3	with	valve
------------	------	------	------	-------

Respirator Mask FFP3







Respirator Mask FFP2 with valve

Respirator mask

Description

- Dust mask / FFP mask
 Protection class FFP2 NR
 Variable aluminium nose stripe for
- better fitting = Exhaust valve

Area of application

Protects against harmful oil- or waterbased particles

Benefits

- Soft and gentle inner section
 Suitable in combination with safety
- glasses Exhaust valve reduces the heat accumulation inside the mask

Application advice

We recommend to exchange the mask after every work shift.

ArtNo.	Specification	SP	MOQ
158.075	Protection class FFP2 NR	20	120

Description

- Dust mask / FFP mask
 Protection class FFP3 NR
- Variable aluminium nose stripe for better fitting
- Exhaust valve

Area of application

Protects against harmful and carcinogenic particles based on oil or water as well as against radioactive particles, airborne biological agents of risk groups 2 + 3 and enzymes

Benefits

- Soft and gentle inner section
- Qualitative headbands for a comfortable fit
- Foam stripes around the noseSuitable in combination with safety glasses
- = Exhaust valve reduces the heat accumulation inside the mask

Application advice

We recommend to exchange the mask after every work shift

ArtNo.	Specification	SP	MOQ
158.076	Protection class FFP3 NR	20	120



Personal Safety

Safety Lens

Protective glasses



Description

Safety glasses Polycarbonate glasses

Application advice

Glasses can be cleaned with warm water and soap

ArtNo.	Specification	SP	MOQ
140.955	Safety Lens	1	12

Safety Lens Vario

Protective glasses



Description

Safety glasses

- Polycarbonate glassesVariable temples

Application advice

Glasses can be cleaned with warm water and soap

ArtNo.	Specification	SP	MOQ
140.954	Safety Lens Vario	1	10

Carbo 2 Perfect

Protective coverall



Coverall Black Suit Protective coverall

UV Brille

UV-protective glasses



Description

- UV-protective glasses
- Polycarbonate glasses

Area of application

Protects from UVA, UVB and UVC radiation

Benefits

- PVC nose piece for perfect fit
- Anti-slip pads
- Scratch resistant, anti-fog glasses
 Suitable in combination with hearing protection

Application advice

Glasses can be cleaned with warm water and soap

ArtNo.	Specification	SP	MOQ
154.263	UV glasses	1	12



Description

- Two-piece protective coverall
- 98 % polyester, 2 % carbon
 Washable up to 40 °C
 PPE Cat. I

- Free of siliconesDust and lint free

Area of application

Protects from unharmful chemicals e. g. water-based paint or mild cleaners

Benefits

- Antistatic coating (EN 1149-1:2006)
 Protection against overspray
 Breathable due to ventilation slots and mesh areas
 The knitted cuffs close wrists and ankles perfectly tight and
- offer a perfect comfort

ArtNo.	Specification	SP	MOQ
156.547	Jacket Carbo 2 Perfect / M	1	25
156.548	Pants Carbo 2 Perfect / M	1	25
156.549	Jacket Carbo 2 Perfect / L	1	25
156.550	Pants Carbo 2 Perfect / L	1	25
156.551	Jacket Carbo 2 Perfect / XL	1	25
156.552	Pants Carbo 2 Perfect / XL	1	25
156.553	Jacket Carbo 2 Perfect / XXL	1	25
156.554	Pants Carbo 2 Perfect / XXL	1	25
157.135	Knee pad 2pcs / pack	1	1

Description

- Protective coverall
 99 % nylon, 1 % carbon
 Washable up to 30 °C
- PPE Cat. I
 Free of silicones
- Dust and lint free

Area of application

Protects from unharmful chemicals e. g. water-based paint or mild cleaners

Benefits


- Antistatic coating (EN 1149-3:2004)
 Protection against overspray
 Extremely breathable due to its special elastic birds eye fabric
 The knitted cuffs close wrists and ankles perfectly tight and
- offer a perfect comfort = Elastic areas on the back and modern cut provide a perfect adaption to the body shape

ArtNo.	Specification	SP	MOQ
157.775	S	1	20
157.776	М	1	20
157.777	L	1	20
157.778	XL	1	20
157.779	XXL	1	20
157.780	3XL	1	20

EXPLORER LTD. 2-PIECE COVERALL

All details at a glance.

PRACTICAL CHEST POCKET Perfectly accessible and due to the Velcro® a great storage for the tack cloth.





ZIPPER WITH PROTECTION STRIP Reliable protection against overspray.

LEG POCKET WITH ZIPPER Nothing falls out here – even the blow off stick stays in.



ELASTIC AREAS ON THE BACK This enables more movement space while working.



PRACTICAL BACK POCKET Even more storage options for e.g. abrasives or microfibre cloths.

> SIDE LEG POCKET The more storage space, the better - also practical storage at the pants leg.



- Personal Safety

175

NEW

Explorer Ltd. 2-Piece Coverall

Protective coverall

Description

- Two-piece protective suit of PPE Cat. I
- Jacket and trousers can be ordered separately
- Comfortable
- Very good fitAntistatic due to carbon fibres
- Silicon free
 Dust and lint free

Area of application

- Protects against low risks e. g. water-based paint or
- mild cleaners Protection against overspray

Benefits

- Individual size selection of jacket and pants
- Many storage options on jacket and pants
 Zip cover provides additional protection against
- overspray Antistatic coating (EN 1149-1:2006)

ArtNo.	Specification	SP	MOQ
158.682	Coverall jacket / S	1	30
158.683	Coverall pants / S	1	30
158.684	Coverall jacket / M	1	30
158.685	Coverall pants / M	1	30
158.686	Coverall jacket / L	1	30
158.687	Coverall pants / L	1	30
158.688	Coverall jacket / XL	1	30
158.689	Coverall pants / XL	1	30
158.690	Coverall jacket / XXL	1	30
158.691	Coverall pants / XXL	1	30
158.692	Coverall jacket / 3XL	1	30
158.693	Coverall pants / 3XL	1	30

ERSONAL SAFETY

176 Personal Safety

Disposable protective coverall

Protective Coverall



Paint Overall Blau

Protective coverall



Description

- Disposable protective coverall
 PPE-Cat III, Type 5 and 6
- Free of silicone and latex
 Dust and lint free

Area of application

Perfect for painting in the spray booth
 Protects against overspray, solvents, water and harmful dust

Benefits

- Antistatic coating (EN 1149-5:2008)
- Breathable
- The knitted cuffs close wrists and ankles perfectly tight and offers a perfect comfort
 Antistatic

Application advice

We recommend to exchange the protective coverall after every shift to prevent linting on the breathable back side.

ArtNo.	Specification	SP	MOQ
155.616	S	1	25
155.617	М	1	25
155.618	L	1	25
155.619	XL	1	25
155.620	XXL	1	25
155.621	XXXL	1	25

Description

- Protective coverall
- Soft polyester fabricPPE-Cat. I

Area of application

Protects from unharmful chemicals e. g. water-based paint or mild cleaners

Benefits

- Antistatic coating (EN 1149-1:2006)
 Dust and lint-free
- Dust and inferree
 Protection against overspray
 Free of silicones

ArtNo.	Specification	SP	MOQ
139.232	S	1	50
139.233	М	1	50
138.472	L	1	50
138.473	XL	1	50
139.234	XXL	1	50
152.968	3XL	1	50



Bodyshirt Black

Functional shirt - short-sleeved

NEW



Description

- Lightweight functional and underwear shirt
- Lightweight functional and units
 Silicone and lint free
 Short sleeve with round neck
 Washable up to 30 °C
 Colour: black

Area of application

- Functional shirt for warm working days
 Breathable undershirt underneath paint suits

Benefits

- Breathable and quick drying
 Optimal fit ensures perfect wearing comfort
- Very soft and light feel
- Quickly transports moisture and excess heat away from the body

ArtNo.	Specification	SP	MOQ
158.535	Μ	1	35
158.536	L	1	35
158.537	XL	1	35
158.538	XXL	1	35

PERSONAL SAFETY



Latex gloves

Protective gloves

Description

Latex gloves 100 pieces in a dispenser boxSlightly powdered

Area of application

Protects against dirt, paint and chemicals

Benefits Slight powder shift makes it easy to put the gloves on and off



ArtNo.	Specification	SP	MOQ
157.981	L	100	1000

Nitril Hand Premium black

Protection gloves

- Description
- Nitril gloves
- 100 pieces in a dispenser box
 Free of silicones, latex and powder

Area of application

Protects against dirt, paint and chemicals

Benefits

Enhanced thickness Very elastic and tear resistant Perfect fit and feel

Application advice

Short time solvent resistant. Touch screen processing is possible.

ArtNo.	Specification	SP	MOQ
156.623	S	100	1000
156.624	М	100	1000
154.347	L	100	1000
154.348	XL	100	1000

Latex Hand I Premium Protection gloves

Description

- Latex gloves
- 50 pieces in a dispenser box
 Powder-free
- Extra long cuff

Area of application

Perfect for fast gun cleaning Protects from light solvents and paints

Benefits

Extra thick Perfect feel and touch when working with solvents and in wet / oily environments



ArtNo.	Specification	SP	MOQ
152.011	L	50	500
152.012	XL	50	500

Super Nitril Hand I Protection gloves

Description

- Chemical protection gloves
- Length: 30 cm
 Soft velour inner section
 Base layer: Nitril

Area of application

- Perfect for handling slippery parts in moist, oily and greasy
- enviroments Protects against chemicals

Benefits

- Perfect feel and touch when working with solvents and in wet / oily environments

Good insulation against heat and cold
 Palm and fingertips with honeycomb pattern for better grip

ArtNo.	Specification	SP	MOQ
145.130	9 / pair	1	144
145.131	10 / pair	1	144



Personal Safety

Neopren Hand

Protection gloves

Description

- Neoprene / Latex chemical
- protection gloves Length: 30 cm

Area of application

- Perfect for handling slippery parts in moist, oily and greasy enviroments Protects against chemicals
- acids, brines, mineral oils, greases and solvents

Benefits

- Perfect mixture between neoprene for chemical
- protection and latex for the flexibility and durability
- Palm and fingertips with honeycomb pattern for a better grip
 Good insulation against heat and cold

ArtNo.	Specification	SP	MOQ
140.939	L / pair	1	12
140.940	XL / pair	1	12
140.941	XXL / pair	1	12

Prep Hand Cut II

Protectiion gloves

Description

- Cut protection glove
 Palm and fingertips PU coated
 Base layer: HPPE-glass fiber
 ISO-13997 cut value: C

Area of application

Perfect for all assembly work with the risk of cuts

Benefits

- Breathable
- Safer grip with a good sense of touch
- Abrasion resistance
 Comfortable fit



Art.-No. Specification SP MOQ 155.539 10 / pair 100 1

PERSONAL SAFETY

Personal Safety

Work gloves

Description

Work gloves PU coated

Palm and fingertips PU coated
 Base layer: Polyamide (Nylon)

Area of application

Perfect for assembly work without the risk of cuts or exposure to chemicals / solvents

Benefits

Breathable

Breathable
 Safer grip with excellent fingertip touch
 Abrasion resistance
 Comfortable fit

	2
s	

ArtNo.	Specification	SP	MOQ
150.719	L	12	144
150.720	XL	12	144
150.721	XXL	12	144

Prep Hand III

Work gloves

Description

Work gloves PU coated Palm and fingertips soft PU coated Base layer: Polyamide

Area of application

Perfect for assembly- and grinding work without the risk of cuts or exposure to chemicals / solvents

Benefits

- Extremely soft and flexible Breathable
 Safer grip with excellent fingertip touch
- Touch screen operation possible
 Abrasion resistance
- Perfect fit

ArtNo.	Specification	SP	MOQ
145.132	9 / pair	12	144
145.133	10 / pair	12	144

Hand Cleaner extreme

Hand cleaner



Hand Cleaner

Hand cleaner



Description

- Mild hand cleaner
- Usage during or after work
 Free of silicones
- Plant based scrubs

Area of application

Removes even resistant dirt of greases and bitumen

Benefits

- Pleasant smell
 Free of solvents
- Biodegradable
 Smooth and comfortable feel due to a natural and skin-friendly

Bulk packing with 3I

ArtNo.	Specification	SP	MOQ
155.356	Bulk packing without pump / 3 L	1	6

Wall dispenser for Soft Bottle 2 I

Wall Dispenser

Description

Wall dispenser for Hand Cleaner extreme Soft Bottle



ArtNo.	Specification	SP	MOQ
155.350	Wall dispener for Soft Bottle	1	1

Description

- Intensive hand cleaner
- Usage during or after work Free of silicones
- Plant based scrubs

Area of application

Removes even resistant dirt of oil paint, oil paint and resins

Benefits

- Pleasant apple smell
- Free of solvents
 Biodegradable
- Smooth and comfortable feel due to a natural and skin-friendly
- oil Wall mount with 2 I soft bottle
 Bulk packing with 3 I

ArtNo.	Specification	SP	MOQ
155.348	Soft bottle without wall dispenser / 2 L	1	6
155.357	Bulk packing without pump / 3 L	1	6

Pump for Hand Cleaner 3 I

Pump for Hand Cleaner classic



ArtNo.	Specification	SP	MOQ
155.359	Pump for Hand Cleaner 3 I	1	1

CAR CLEAN TROLLEY SAFETY KNIFE UV LED LAMP XL WORK SHOP BUCKET PAINT TROLLEY ACCESSORIES PAPER TROLLEY UV TIMER COLOUR MATCH LAMP PAINT TROLLEY WORK SHOP SEAT UV SMART LAMP MAGNETIC FLAT STRIP MINI INFRARED THERMOMETER



Accessories

UV Smart Lamp

UV hand lamp



Description

- Power: 5 Watt
- Battery: 3.7V 2.6 Ah Li-Ion
- Charging time: 4 hoursRunning time: 4.5 hours
- Norking time: 4.5 hours
 Working temperature: -10 °C to +40 °C
 Weight: 310 g
 Dimensions: 190 × 56 × 29 mm
 Certification: IP65 | IK07

Area of application

UV hand lamp for curing UV products for spot repair on a surface with a maximum diameter of 10 cm

Benefits

- Battery operated UV hand lamp for flexible use
 Adjustable magnetic stand for working on vertical application
- areas Hook for space-saving storage

Application advice

Always protect your eyes when using UV lamps. Wear Carsystem UV safety glasses.

ArtNo.	Specification	SP	MOQ
153.777	190 × 56 × 29 mm	1	12

Tripod for LED Lamps

000

Description

Tripod

Tripod for holding up to 3 LED lamps



ArtNo.	Specification	SP	MOQ
154.646	Tripod for LED lamps	1	6

UV LED Lamp XL

UV LED lamp XL



Description

- Power: 30 Watt
- Battery: 11.1V 5.2 Ah Li-Ion
 Charging time: 3 hours 45 minutes
- Working time: 2.5 hours
 Working temperature: -10 °C to +40 °C
- Weight: 1.34 kg
 Dimensions: 266 × 237 × 59 mm
 Certification: IP65 | IK07

Area of application

UV LED Lamp for curing UV products on a surface with a maximum diameter of 70 cm at a distance of 30 cm

Benefits

- Battery operated UV LED lamp for flexible use
 180° swivel stand to set the required lighting angle
- Operation during charging process possible
 Extremely robust and resistant

Application advice

Always protect your eyes when using UV lamps Wear Carsystem UV safety glasses.

ArtNo.	Specification	SP	MOQ
155.036	UV LED Lamp XL	1	6

UV Timer

Timer for UV Lamps

Description = UV Timer to control drying times



ArtNo.	Specification	SP	MOQ
154.772	UV timer	1	1

Magnet for LED Lamps

Magnet

Description

Magnet for flexible fixing of LED Lamps



ArtNo.	Specification	SP	MOQ
154.648	Magnet for LED lamps	1	60

Mini Infrared Thermometer

Infrared mini-thermometer

Description

Robust aluminium housing
 Impact-free measuring of temperatures between -33 °C und +220 °C

Area of application

For measuring object temperatures on surfaces

Application advice

For measuring temperatures, point the detector head to the object and press the measuring



button for about one second. The display can be switched between (°C/°F) by the tip of a ball pen, pressed into the pit on the backside of the housing.

ArtNo.	Specification	SP	MOQ
144.557	Mini Infrared Thermometer	1	1

LED Lamp

LED lamp



Accessories

Description

- Power: 20 Watt
- Battery: 11.1V 4.4 Ah Li-Ion
- Charging time: 4 h
 Working time depending on mode: 10 h / 5 h / 2.5 h
- Light intensity:
- Mode 1 = 500 lumen
- Mode 2 = 1,000 lumen
 Mode 3 = 2,000 lumen
- Working temperature: -10 °C to +40 °C
- Weight: 1.15 kg
 Dimensions: 225 × 220 × 70 mm
- = Certification: IP65 | IK07

Area of application

LED lamp for universal use in every working environment

Benefits

- Battery powered LED lamp for flexible use
 180° swivel stand to set the required lighting angle
- Power selection
- Very even light level due to COB-LED-technology
- Extremely robust and resistant
 Operation during charging process possible

ArtNo.	Specification	SP	MOQ
155.037	LED lamp	1	6

Blow Off Gun

Blow off gun



Colour Match Lamp

Day light lamp



Description

- Power: 5 Watt
- Battery: 3.7V 2.6 Ah Li-Ion

- Battery: 3.7V 2.6 Ah Li-Ion
 Charging time: 4 hours
 Running time: 2.5 hours
 Light intensity:
 1.Mode = 2,700K 500 lumen CRI>96+
 2.Mode = 4,500K 500 lumen CRI>96+
 Working temperature: 10.9C to 140.9C
- Store = 6,500K 500 funter CRI>90
 Working temperature: -10 °C to +40 °C
 Weight: 310 g
 Dimensions: 190 × 56 × 29 mm
 Certification: IP65 | IK07

Area of application

= LED Colour matching lamp

Benefits

- Battery powered LED lamp for flexible use Adjustable magnetic stand for work on vertical application
- areas
- Choice between three different colour temperatures Extremely robust and resistant

ArtNo.	Specification	SP	MOQ
155.614	Colour Match Lamp	1	12

Blow Off Stick

Blow off stick



Description

- Ergonomic handle
- Maximum inlet pressure: 10 bar
- Temperature resistance: -15 °C to +70 °C

Area of application

For blowing off residual dust from all surfaces

Benefits

- Blow off gun with metal tip for precise cleaning of surfaces and cavities
 Blow off gun with noise reduction to ~ 77 db with a scratch preventing plastic nozzle

ArtNo.	Specification	SP	MOQ
145.270	Blow Off Gun with sound absorption and nipple (EU)	1	5
145.271	Blow Off Gun with sound absorption and nipple (CH, NL)	1	5
145.272	Blow Off Gun with metal nozzle and nipple (EU)	1	5
145.273	Blow Off Gun with metal nozzle and nipple (CH, NL)	1	5

Description

- Noise reduction
- Chemical resistant
 Air consumption: 450 I / min. at 10 bar Temperature resistance: -40 °C to +150 °C
- Area of application
- For blowing off residual dust from all surfaces

Benefits

Rubber tip prevents from scratching the surface

ArtNo.	Specification	SP	MOQ
154.123	Blow Off Pen Orion (EU)	1	200
154.124	Blow Off Pen ARO (CH, NL)	1	200

Accessories

Maintenance oil

Description

 Transparent maintenance oil Silicon-free

Area of application

Maintains and lubricates pneumatic grinding and polishing machines

Benefits

Also applicable at low temperatures

Corrosion and wear protection





Description Capacity: 10 I Area of application Universal workshop bucket



120.442 Workshop bucket / 10 L 1 1	ArtNo.	Specification	SP	MOQ
139.442 Workshop bucket / 101	139.442	Workshop bucket / 10 I	1	1

Workshop Seat Workshop seat



ArtNo.	Specification	SP	MOQ
150.190	50 ml	1	5

Magnetic Sanding Protection

Edge protection

A.C. Same Description Flexible plastic edge protection Area of application Magnetic edge protection avoids unwanted sanding on surrounding parts

ArtNo.	Specification	SP	MOQ
130.992	4 × 55 cm	1	5

Magnetic Flat Strip

Flat strip

Description Flexible plastic strip

Area of application = Flat and magnetic adhesive plastic strip for sealing the masking film onto the car

ArtNo.	Specification	SP	MOQ
137.214	4 × 55 cm	1	5

Paint Trolley

Bumper paint stand



CONTRACTOR OF THE OWNER

Description

- Hydraulic height adjustment
 The seat is resistant against chemicals and solvents
 Smooth seat cushion for easy cleaning
 Five rubber-protected wheels on ball bearings
- Max. load: 150 kg

Area of application

Comfortable workshop seat in Carsystem design for all sanding and polishing works

Benefits

Magnetic storage platform for tools and working materials

ArtNo.	Specification	SP	MOQ
149.427	Professional workshop seat	1	1

Description

- Height adjustable bumper paint stand
- Infinitely adjustable inclination Ergonomic working position
- Mobile on wheels
 All wheels individually lockable
- For a huge variety of different bumpers

Area of application

= For assembly, sanding, painting or polishing of different bumpers


ArtNo.	Specification	SP	MOQ
148.748	Bumper paint stand	1	1

Accessories

X-Stand Classic

Paint stand

Description = Height: 50 - 100 cm





= Holding different car parts e. g. hoods, doors etc.

ArtNo.	Specification	SP	MOQ
137.349	50 - 100 cm	1	1

X-Stand Top

Paint stand Description

= Height: 50 - 125 cm Maximum load: 120 kg
Extension poles available in 55 cm



Area of application

Holding different car parts e. g. hoods, doors etc.

ArtNo.	Specification	SP	MOQ
138.851	50 – 125 cm	1	1
138.852	50 – 125 cm incl. extension	1	1

Paint Trolley

Paint stand



Paint Trolley Flexi Plus

Paint stand



Description

- Mobile paint stand with 28x adjustable axle

- Wohle paint stand with 26x adjustable
 Extremely robust
 Six fixing arms
 Two additional bumper fixing arms
 Dimensions: 225 x 74 x 101c m (l/w/h)
- Maximum load: 50 kg

Area of application

Holding different car parts e. g. hoods, doors, bumpers, fenders etc.

Benefits

Extremely good quality

Very high stability

ArtNo.	Specification	SP	MOQ
152.596	Paint trolley incl. extention	1	1

Paper Trolley

Triple paper stand

Description

- Mobile paper stand for three different paper sizes (22, 60,
- 90 cm)
 Including adjustable holders for masking tape rolls which fix the
- adding tape for swhere the tapes perfectly onto the paper edge
 Dimensions: 135 × 59 × 110 cm (l/w/h)



Area	of	application	

For fast masking work in the paint shop

ArtNo.	Specification	SP	MOQ
138.862	Paper Trolley	1	1

Description

- Mobile paint stand with 360° adjustable axle
- Four fixing arms
 Two additional bumper fixing arms
 Two hooks for storing of unused fixing arms
- Paint gun holder
 Dimensions: 225 × 88 × 95 cm (l/w/h)
- Max. load: 50 kg

Area of application

= Holding different car parts e. g. hoods, doors etc.

ArtNo.	Specification	SP	MOQ
138.848	Spare claws for paint trolley	1	1
138.849	Fixing arm	1	1
154.253	Paint trolley incl. extention	1	1

Paper Trolley 1500

Paper stand

Description

Mobile paper stand for rolls up to 150 cm

Area of application

For fast masking work in the paint shop



ArtNo.	Specification	SP	MOQ
139.101	150 cm	1	1

MMIR Trolley "Box"

Masking film stand



Description

Mobile masking film stand for rolls in a box The film is unrolled directly from the box

Area of application

For fast masking work in the paint shop

ArtNo.	Specification	SP	MOQ
151.514	MMIR Trolley Box	1	1

Safety Knife

Cutting tool

Description

- Safety knife
 Basematerial: Glass fibre reinforced plastic

- Weight: 24.4 g
 Cutting depth: 6.2 mm
- Scraper blade: 21 mm
 Dimensions: 148 × 11 × 37.2 mm (I/w/h)

Area of application

- Scraping, scratching, cutting:
 Masking film or paper
 Wrapping, stretch and shrink film
- Tapes
 Cardboard up to 2-ply
- Sticker and labels

Benefits

- Highest level of safety occupational safety
- Multifunction: Scraping, scratching, cutting
 Suitable for right and left handers
- Very ergonomic and comfortable to use

Application advice

The perfect cutting angle is 45°. We recommend to fix f.e. masking film with the free hand, while cutting. Fixed blade, no exchange necessary.

ArtNo.	Specification	SP	MOQ
158.212	Black / 148 × 11 × 37.2 mm	1	10

MMIR Trolley

Masking film stand

Description

Mobile masking film stand for holding rolls without a box Dimensions: 106 × 44 × 92cm (l/w/h)

Area of application For fast masking work in the paint shop



Car Clean Trolley

Cleaning paper stand

Description

 Floor stand or wall holder for cleaning paper rolls with a width up to 40 cm incl. garbage bag holder included

Area of application = For flexible cleaning jobs in the paint shop



Opener for putty and filler cans

Stainless steel can opener



ArtNo.	Specification	SP	MOQ
125.737	MMIR Trolley	1	1

ArtNo.	Specification	SP	MOQ
139.912	Car Clean Trolley	1	1
139.913	Car Clean Wall Holder	1	1



Accessories



Description

- Multifunctional opener for putty and filler cans
 Hexagon recess (10 mm wrench)
 Mandrel

- Manufeli
 Engraved ruler
 Bottle opener
 Dimensions: 13.2 cm
 Material: Stainless steel

Area of application

- Opening of putty and filler cans, bottles and machine-
- Opening of party and mer of locked clamping rings
 Venting cans and canisters
- Screw connection (10 mm wrench)

ArtNo.	Specification	SP	MOQ
158.209	13.2 cm	1	1





Quickfinder

1K Easy Filler	11
1K Easy Primer	11
1K Epoxy Primer	11
1K NC Filler	07
2K Carbo Clear Plus	10
2K Clear VOC 420	10
2K Clear VOC CC.19 AS	10
2K Clear VOC HS-SR	10
2K Clear VOC Matt	10
2K Clear VOC Premium	
2K Clear VOC Speed Plus	
2K Epoxy Fill Primer	11
2K Filler Air Plus	10
2K Filler Vario Plus	10
2K Filler Wet on Wet Plus	10
2K High-Speed Klarlack	11
2K VOC Filler 540	10

Α

Acryl Thinner	
Activator	107
AF.211K Filler	102
AF.21 X-pert	103
Air hose	125
Alu Spezial	063
Aluminium mesh	078
Anti Rust Putty	064
Applicator	147
Auto Mask	087

В

Bite	019
Black Tape	
Blacky	
Blow Off Gun	187
Blow Off Stick	187
Bodyshirt Black	177
Booth Mask	
Booth Mask Stick	11
Booth Mask White	
BPO Hardener	073
Brush Set	123
Bumper Paint	120
Bumper Paint Spray	120
Bumper Structurant Spray	

С

C-Wax C-801	
Car Clean Double Blue1	164
Car Clean Double White1	164
Car Clean Multi1	163
Car Clean Multi Box1	163
Car Clean Multi Extreme Box	163
Car Clean Triple Blue1	164
Car Clean Trolley	192
Car Mop White	139
Car Mop Yellow	139
Car Pad Black	141
Car Polish Roll	141
Carbo 2 Perfect	173
Carbo Putty	070
Carbo Spray	070
Carbo Spray Thinner	
CC.20 X-pert	99
CC.21 X-press FIVE	
Classicline Soft Pad	015
Cleaning wipes1	165
Clear Coat Spray	120
Cockpit-Spray1	166
Coding Caps	167
Color Match Card Paper	122
Colour Match Lamp1	186
Control-Spray)50
Coverall Black Suit	173
D	
D	
Dispenser bottle incl. Cap1	133

Dispenser for 5 kg Polish...

Discourse for a sist stario se	100
Dispenser for paint strainers	
Dispenser Multi-Mix	108
Disposable protective coverall	176
Double Sanding Soft Pad	014
Dry Coat 2.0 – Starter Set	048
Dry Coat-black	049
Dry Coat-orange	049
Dualmatic	079
Dust Keeper	
Dust Needle	123
E	
Easy Clean Box	081
Easy Mask	087

Easy Mask	087
EF.21EP-Filler	
Elastic Additive	
Elastic beige	065
Elastic Green	
Elastic weiss	065
Etch Primer	117
Excenter Back Pad Multi M	
Excenter Back Pad T.19	042
Excenter Classic	
Explorer Ltd. 2-Piece Coverall	

F

Faser	
Felgo Tape	094
Fill	
Fill putty	
Fine Block	
Fine Line Tape Blue	
Fine putty	
Finish Back Pad	
Finish Back Pad M-14	
Finish Clay	
Finish Control Foam C-99	
Finish Foam Black AH	
Finish Foam Orange	
Finish Foam White AH	
Finish Quadra Pad C10	
Finish Sander Back Pad	043
Finish Sander RC 9332	041
Finish Sandwich Pad C30	
Finish Waffle Foam Black AH	
Finish Waffle Pad Orange	
Flex	
Floor Mats	
Flow	
Foam Tape	
Foam Tape T-Soft	
G	
Glas	067

Glas	
Glas White	
Glass fibre fabric	
Glass fibre fleece	078
Glass fibre mat	077
Glass fibre reinforced putty	076
Gun Clean Set	166
н	

Hand Cleaner	
Hand Cleaner extreme	
Hand Mask	
Hi Temp	
High Gloss Additive	
HpP Primer	114
HS-Acryl Tape	150
H ₂ O Cleaner	161
1	
Interface Pad	
ISO-VE 7030	161
J	
Japanese Putty Knife	

Κ

ĸ	
KS-100	151
KS-1000	
KS-1050	
KS-200	151
KS-2100	
KS-250	153
KS-300	151
KS-3000 Plus	
KS-400	
KS-4000	153
KS-50	
KS-500	151
KS-550	
KS-800	
KS-850	
KS-Brush	
KS-Dual Gun	153
KS-Gun	153

L

Lamb Woll Pad White S	
Lamb Wool Pad Gold S140)
Lamm Wool Pad White S Edge140)
Latex gloves	9
Latex Hand Premium 178	3
LED Lamp	6
Liquid Masking	9
Liquid Putty066	6

М

Magnet for LED Lamps	j.
Magnetic Flat Strip	6
Magnetic Gun Holder 123	
Magnetic Sanding Protection	6
Masking film blue 085	j.
Masking film green	j.
Masking film yellow 085	j.
Masking Paper Master 084	
Masking Paper Top II	
Master Tape Green 089	1
Master Tape II	
Metallic063	6
Micro Fiber Cloth	6
Micro Tip 124	
Mini Back Pad 042	
Mini Infrared Thermometer	j.
Mini Sanding Discs Grip	
Mini Sanding Machine RC 9330 042	
Mixing Stick Alu	1
Mixing Stick Black)
MMIR Knife Premium	1
MMIR Trolley	
MMIR Trolley "Box"	
MMIR-Mask Aqua Tec	
MMIR-Mask Light Green 087	
Mount Tape	
MS Air Gun	
MS Coupling)
MS Coupling) ;
MS Coupling) ;
MS Coupling) - -
MS Coupling) - -
MS Coupling	
MS Coupling) - - - -
MS Coupling) - - - -
MS Coupling 125 Multi 054 Multi Blue Changer 056 Multi Green 058 Multi Green Changer 057 Multi Green Glas 059 Multi Green Glas Light 058 Multi Green Rapid 059	
MS Coupling	
MS Coupling 125 Multi 054 Multi Blue Changer 056 Multi Green 058 Multi Green Changer 057 Multi Green Glas 059 Multi Green Glas Light 058 Multi Green Rapid 059	
MS Coupling 125 Multi 054 Multi Blue Changer 056 Multi Green 058 Multi Green Changer 057 Multi Green Glas 059 Multi Green Glas Light 059 Multi Green Rapid 058 Multi Green Rapid 057 Multi Green Rapid 058 Multi Green Rapid 058 Multi Green SF 057 Multi Light 054 Multi IPlus 055) - - - - - -
MS Coupling 125 Multi 054 Multi Blue Changer 056 Multi Green 058 Multi Green Glas 059 Multi Green Glas Light 059 Multi Green Plus 1.0 Super Light 058 Multi Green Rapid 060 Multi Green SF 057 Multi Green SF 057) - - - - - -
MS Coupling 125 Multi 054 Multi Blue Changer 056 Multi Green 058 Multi Green Changer 057 Multi Green Glas 059 Multi Green Glas Light 059 Multi Green Rapid 058 Multi Green Rapid 057 Multi Green Rapid 058 Multi Green Rapid 058 Multi Green SF 057 Multi Light 054 Multi IPlus 055	
MS Coupling 125 Multi 054 Multi Blue Changer 056 Multi Green 058 Multi Green Changer 057 Multi Green Glas 059 Multi Green Glas 059 Multi Green Glas 059 Multi Green Rapid 058 Multi Green Rapid 060 Multi Green SF 057 Multi Light 054 Multi Silver Light 056 Multi Soft 056 Multi Soft 056 Multi Strain 109	
MS Coupling 125 Multi 054 Multi Blue Changer 056 Multi Green 058 Multi Green Changer 057 Multi Green Glas 059 Multi Green Glas Light 058 Multi Green Rapid 060 Multi Green Rapid 060 Multi Green SF 057 Multi Green SF 057 Multi Light 054 Multi Silver Light 055 Multi Silver Light 055	
MS Coupling 125 Multi 054 Multi Blue Changer 056 Multi Green 058 Multi Green Changer 057 Multi Green Glas 059 Multi Green Glas Light 058 Multi Green Rapid 060 Multi Green Rapid 060 Multi Green SF 057 Multi Jight 054 Multi Silver Light 055 Multi Soft 056 Multi Soft 056 Multi Soft 056 Multi Super Flex 066 Multi Super Flex 068	
MS Coupling 125 Multi 054 Multi Blue Changer 056 Multi Green 058 Multi Green Changer 057 Multi Green Glas 059 Multi Green Glas 059 Multi Green Glas Light 058 Multi Green Rapid 060 Multi Green SF 057 Multi Ight 054 Multi Ight 055 Multi Silver Light 056 Multi Soft 056 Multi Strain 109 Multi Super Flex 068	

N Nano Carnauba Wax		Rallye-Spray Premiur Refinish 1
Nano Easy Cleaner		Refinish Restorer
Neopren Hand		Replacement Spray H
Nippel		Respirator Mask FFP
Nitril Hand Premium black		Respirator Mask FFP
		RUPES 47.105 Replac
0		Rupes 9. Holder BigF
Opener for putty and filler cans	193	RUPES Angle Polishir
D		RUPES Angle Polishir
P		RUPES Back Pad
Pad Saver	044	RUPES Carrier
Paint Arrestor		RUPES Cleaning and
Paint Overall Blau		RUPES Compact Vac
Paint Planer		RUPES Ibrid Nano RUPES Ibrid Nano Q-
Paint System CPS		RUPES Mini Polishing
Paint Trolley		RUPES Mini Random
Paint Trolley Flexi Plus		RUPES Orbital Sande
Paper Trolley		RUPES Orbital Sande
Paper Trolley 1500		RUPES Orbital Sande
PG - FG Feinfilter		RUPES Polish Pad
Plastic Can Empty		RUPES Polishing Mac
Plastic Cleaner		RUPES Polishing Mac
Plastic Primer		RUPES Polishing Mac
Plastic Pro		RUPES Polishing Mac
Plastic spreader		RUPES Random Orbi
Polish C-05 cut		RUPES Random Orbi
Polish C-07 cut		RUPES Random Orbi
Polish C-10 strong		RUPES Random Orbi
Polish C-30 finish		RA75
Polish Foam Green Polish Foam White SC		RUPES Skorpio E RX
Polish Foam Yellow		RUPES Skorpio III RH
Polish Waffle Foam Yellow		RUPES Vacuum Clear
Polish – Coarse Step 1		RUPES Workshop Ca
Polish – Fine Step 2		0
Polishing Back Pad		S
Polishing Machine RC 166		S.211K Filler
Polyester Repair Resin		S.211K Primer
Polyester Repair Set		S.212K High-Speed (
Power Mix		S.21 Plastic Primer
Power Mix Film		S.21 Spotblender
Power Mix Gun		S.21 Zinc-Spray
Power Mix Primer		Safety Coupling
Power Mixer		Safety Knife
Prefill-Spray		Safety Lens
Prefill-Spray Water		Safety Lens Vario
Prep & Scuff	019	Sanding Block 198 Gr
Prep Hand Cut II		Sanding Block 198 Kit
Prep Hand II		Sanding Block 400 G
Prep Hand III		Sanding Block 400 G
Prep-Brush		Sanding Block Box Gi
Primer Spray		Sanding Block Disc K
Primer Surfacing Spray		Sanding Block Grip
ProFlex Back Pad PSA		Sanding Block Hard .
ProFlex Callisto		Sanding Disc F.19
ProFlex Interface Pad	033	Sanding Disc F.19 Fini
ProFlex Jupiter	021	Sanding Disc F.19 Sof
ProFlex Jupiter Soft		Sanding Disc P.19
ProFlex Jupiter Soft H ₂ O	023	Sanding Fleece V.19 .
ProFlex Mercury		Sanding Strips P.19
ProFlex Mercury Sanding Block		Sanding Water SW20
ProFlex Neptune	026	Scraper Seat Covers
ProFlex Neptune Pad		Seat Covers Silicone Remover Mile
ProFlex Neptune Pad MaxGrip		
ProFlex Neptune Soft		Silicone Remover Spr Silicone Remover Wa
ProFlex Pluto		
ProFlex Pluto Sanding Block	030	Silver Tape
ProFlex Saturn	028	Silver Wheel
Protective Film SPF		Slim Tape
Pump for Hand Cleaner 3 I	181	Slim Tape Green
Pump Spray		Soft
Putty dispenser		Soft Interface Pad
Putty Knife		Sound Deadening Pa
Putty Mix Board		Speedmixer 10 kg
-		Speedmixer 3 kg
R		Spotblender
		Spotblender Spray

..133

Quickfinder

131)
ith valve171	
ith valve171	
ent carbon brush 136	
	3
Achine LH16ES 134	
Machine LH76P135	
intenance oil	3
n Cleaner SV10E 040)
Q040)
achine HLR75STB136	
bital Sander LD30 039 E21ALN	
L42AES	
LP41A 037	,
e LH19E134	ŀ
e LHR15134	
e LHR75135 e LHR75E135	
Sander ER 034	
Sander TA50 039	
Sander TA6A 036	
Single-Hand Sander	
038	
)
er KC28 040	í
114	ŀ
ar Coat112	
	3
	5
	8
	8 8 8 8
113 112 112 118 125 193 172 172 172 172	
113 112 112 118 125 193 172 172 046 045	
113 112 112 118 125 193 172 172 046 045 045 046	
113 112 112 118 125 193 172 172 172 046 045 046 046	
113 112 112 118 125 193 172 172 046 045 045 046	
113 112 112 118 125 193 172 172 046 046 046 046 046 046 046 046 046 046	
113 112 112 112 112 112 112 112 112 112	
113 112 112 112 125 193 172 172 172 172 046 046 046 046 046 046 046 046 046 046	
113 112 112 118 125 193 172 172 172 046 046 046 046 046 046 046 047 047 047 047 047 047 047 047	
113 112 112 112 112 125 193 172 172 046 046 046 046 046 046 046 046 047 047 047 047 047 047 047 047	
113 112 112 118 125 193 172 172 172 046 046 046 046 046 046 046 046 047 047 047 047 047 047 047	
113 112 112 118 125 193 172 172 046 045 046 045 046 047 047 047 047 047 047 047 047 047 047	
113 112 112 112 112 125 193 172 172 046 045 045 045 046 046 047 047 047 047 047 047 047 047	
113 112 112 112 125 193 172 172 172 172 046 046 046 046 046 046 046 046	
113 112 112 112 112 125 193 172 172 046 046 046 046 046 046 047 047 047 047 047 047 047 047	
113 114 115 116 116 117 118 125 193 172 172 046 046 046 046 046 046 047 047 047 047 047 047 047 047	
113 114 115 116 117 118 118 118 118 118 118 118	
113 114 115 116 116 117 118 125 193 172 172 046 046 046 046 046 046 047 047 047 047 047 047 047 047	
113 114 115 116 117 118 117 118 125 193 172 172 046 045 046 045 046 046 047 047 047 047 047 047 047 047	
113 114 115 116 117 117 117 117 117 117 117	
113 114 115 116 117 117 118 125 193 172 172 172 046 046 046 046 046 046 047 047 047 047 047 047 047 047	
113 112 112 112 112 112 112 112 112 112 112 112 112 112 112 112 112 046 046 046 046 047 0	
113 112 112 112 112 112 112 112 112 112 112 112 112 112 112 112 112 112 046 046 047 048 048 0	
113 112 112 112 112 112 112 112 112 112 112 112 112 112 112 112 112 046 046 046 046 047 0	
113 112 112 112 112 112 112 112 112 112 112 113 125 193 172 046 046 047 046 047 048 049 160 046 046 046 045 045	
113 112 112 112 112 112 112 112 112 112 112 113 125 193 172 046 046 047 046 047 048 049 046 046 046 0	

Spray Filler Spray	118
Spray Head	121
Spray Out Cards Metal	
Spray Plus	072
Spray Thinner	072
Spraygun cleaner	
Squeezer	
Star Dust P2	171
Star Mask	
Star Mask Disc	
Star Mask Pre P2 R	
Star Mask Refill	
Staub Stop	161
Staub Stop Super Wave	161
Staub Stop Water	
Staub Stop Water Black	
Steel	
Steel Bond	
Steering Wheel Covers	
Stripping Disc	051
Super Nitril Hand I	

т

1	
Tape Off Disc Premium	
Tape Off Tool	
Tec Line Matt Matting Mousse	019
Tec Line Mattflex Pad	018
Tec Line Mattflex Premium	018
Tec Line N20	012
Tec Line Pro Finish	012
Tec Line Softflex	012
Tec Line Stick	
Thermo-Spray	119
Tinting paste filler	
Тор	073
Тор Таре	
Topline Soft Pad	015
Topline WP A	013
Topline WP S	013
Touch Up	
Tripod for LED Lamps	

U

	0	
	UNIFLEX Adapter Nozzle	.148
	UNIFLEX Air Gun	.148
	UNIFLEX Glas	.146
	UNIFLEX Glas Fast-Cleaner	. 147
	UNIFLEX Glas Fast-Primer	. 147
	UNIFLEX Glas HM	.146
	UNIFLEX Gun	.149
	UNIFLEX MS	.146
	UNIFLEX Nozzle	. 147
	UNIFLEX PU	.146
	UV Brille	. 172
	UV Clear	.102
	UV Filler Spray	.102
	UV LED Lamp XL	
	UV Smart Lamp	.184
	UV Timer	.185
1		
	W	
	•••	
	Wall Bracket	095
	Wall Bracket	
		.133
	Wall Bracket Wall Bracket for 5 kg Polish	.133 .181
	Wall Bracket Wall Bracket for 5 kg Polish Wall dispenser for Soft Bottle 21	.133 .181 141
	Wall Bracket. Wall Bracket for 5 kg Polish Wall dispenser for Soft Bottle 2 I Wax Puck Wheel Cover	.133 .181 141 094
	Wall Bracket. Wall Bracket for 5 kg Polish Wall dispenser for Soft Bottle 21 Wax Puck	.133 .181 141 094 092
	Wall Bracket. Wall Bracket for 5 kg Polish. Wall dispenser for Soft Bottle 2 I. Wax Puck Wheel Cover WM Tape.	.133 .181 141 094 092 .188
	Wall Bracket. Wall Bracket for 5 kg Polish. Wall dispenser for Soft Bottle 2 I. Wax Puck. Wheel Cover. WM Tape. Workshop Bucket.	.133 .181 141 094 092 .188 .189
	Wall Bracket. Wall Bracket for 5 kg Polish Wall dispenser for Soft Bottle 21 Wax Puck. Wheel Cover. WM Tape. Workshop Bucket Workshop Seat. WR-Lifting Tape.	.133 .181 141 094 092 .188 .189 092
	Wall Bracket. Wall Bracket for 5 kg Polish. Wall dispenser for Soft Bottle 2 I. Wax Puck Wheel Cover WM Tape. Workshop Bucket. Workshop Seat. WR-Lifting Tape. WR-Lifting Tape Premium	.133 .181 141 094 092 .188 .189 092
	Wall Bracket. Wall Bracket for 5 kg Polish Wall dispenser for Soft Bottle 21 Wax Puck. Wheel Cover. WM Tape. Workshop Bucket Workshop Seat. WR-Lifting Tape.	.133 .181 141 094 092 .188 .189 092
	Wall Bracket. Wall Bracket for 5 kg Polish. Wall dispenser for Soft Bottle 2 I. Wax Puck Wheel Cover WM Tape. Workshop Bucket. Workshop Seat. WR-Lifting Tape. WR-Lifting Tape Premium	.133 .181 141 094 092 .188 .189 092 .091
	Wall Bracket. Wall Bracket for 5 kg Polish. Wall dispenser for Soft Bottle 21. Wax Puck. Wheel Cover. WM Tape. Workshop Bucket Workshop Seat. WR-Lifting Tape WR-Lifting Tape Premium	.133 .181 141 094 092 .188 .189 092 .091
	Wall Bracket. Wall Bracket for 5 kg Polish. Wall dispenser for Soft Bottle 21. Wax Puck. Wheel Cover. WM Tape. Workshop Bucket Workshop Seat. WR-Lifting Tape. WR-Lifting Tape Premium. X X-Stand Classic	.133 .181 141 094 092 .188 .189 092 .091

..118

Zinc Spray

.071



For more information visit us on: www.carsystem.org



Phone: +49 (0) 41 22 / 717 - 0 Fax: +49 (0) 41 22 / 717 - 193 info@carsystem.org

